

U.S. DEPARTMENT OF THE INTERIOR
U.S. GEOLOGICAL SURVEY

**SEISMIC VELOCITIES AND GEOLOGICAL CONDITIONS AT
TWELVE SITES SUBJECTED TO STRONG GROUND MOTION
IN THE 1994 NORTHRIDGE, CALIFORNIA, EARTHQUAKE:
A REVISION OF OFR 96-740**

by

James F. Gibbs, John C. Tinsley, David M. Boore, and William B. Joyner¹

U.S. Geological Survey Open-File Report 99-446

This report is preliminary and has not been reviewed for conformity with U.S. Geological Survey editorial standards or with the North American Stratigraphic Code. Any use of trade, product, or firm names is for descriptive purposes only and does not imply endorsement by the U.S. Government.

¹Menlo Park, CA 94025

TABLE OF CONTENTS

	Page
Introduction	1
Revision of Open File Report 96-740	1
Regional Geologic Setting	5
Acceleograph Sites and Areal Geology	9
Geologic and Geophysical Logs	10
<i>P</i> - and <i>S</i> -Wave Travel-Time Data	10
Determining Velocity Profiles	11
Summary Velocity Profiles	13
Acknowledgments	20
References	21
 Appendix A—Detailed Results:	
Epiphany Lutheran Church	23
Jensen Generator Building	30
Jensen Main Building	37
Knolls Elementary School	44
Los Angeles Dam	51
Olive View Hospital	58
Rinaldi Receiving Station	65
Sepulveda V.A. Hospital	72
Sherman Oaks Park	79
Sherman Oaks Woodman	86
Sylmar Converter West	93
White Oak Church	100
 Appendix B—Poisson's Ratios:	
Epiphany Lutheran Church	107
Jensen Generator Building	108
Jensen Main Building	109
Knolls Elementary School	110
Los Angeles Dam	111
Olive View Hospital	112
Rinaldi Receiving Station	113
Sepulveda V.A. Hospital	114
Sherman Oaks Park	115
Sherman Oaks Woodman	116
Sylmar Converter West	117
White Oak Church	118
 Appendix C—Comparison of Models:	
Epiphany Lutheran Church	119
Jensen Generator Building	121
Jensen Main Building	123
Knolls Elementary School	125
Los Angeles Dam	127
Olive View Hospital	129
Rinaldi Receiving Station	131
Sepulveda V.A. Hospital	133
Sherman Oaks Park	135
Sherman Oaks Woodman	137
Sylmar Converter West	139
White Oak Church	141

X El Segundo motion station

SEISMIC VELOCITIES AND GEOLOGICAL CONDITIONS AT
TWELVE SITES SUBJECTED TO STRONG GROUND MOTION
IN THE 1994 NORTHRIDGE, CALIFORNIA, EARTHQUAKE:
A REVISION OF OFR 96-740

by

James F. Gibbs, John C. Tinsley, David M. Boore, and William B. Joyner

INTRODUCTION

The Northridge, California, earthquake of January 17, 1994 (moment magnitude 6.7) was perhaps the best recorded earthquake in history from the standpoint of strong ground motion. As part of the U.S. Geological Survey's ongoing program for documenting the relationship between strong ground motion and geologic and seismic site conditions, 12 boreholes, each approximately 100 meters deep, were drilled at sites affected by the Northridge earthquake. Ten of the boreholes were located at strong-motion recording sites; the other two were located at sites in the Sherman Oaks district of Los Angeles to evaluate an apparent relationship between site conditions and building damage noted there. At each site lithologic descriptions were compiled from observations of drill cuttings and cored samples. Four different types of electric logs were made, and downhole *P*- and *S*-wave velocities were measured. The results of the logging were reported earlier in Open-File Report 96-740 (Gibbs, et al., 1996). A revision of those results is presented in this report. The sites are geographically shown in Figure 1 and listed in Table 1, which gives references to information regarding the strong-motion data. Appendix A contains for each site: a location map, *S*- and *P*-wave time-series records, a time-depth plot, velocity profiles with a generalized geologic log, and tables giving arrival times and velocity values. Appendix B contains tables of *P*- and *S*-wave velocity models and the Poisson's ratios obtained from those models, and Appendix C contains figures comparing the velocity profiles from the original open-file report, the revised models, and where available, velocities models computed from suspension logging.

REVISION OF OPEN FILE REPORT 96-740

We have made a number of changes to the borehole velocity models previously

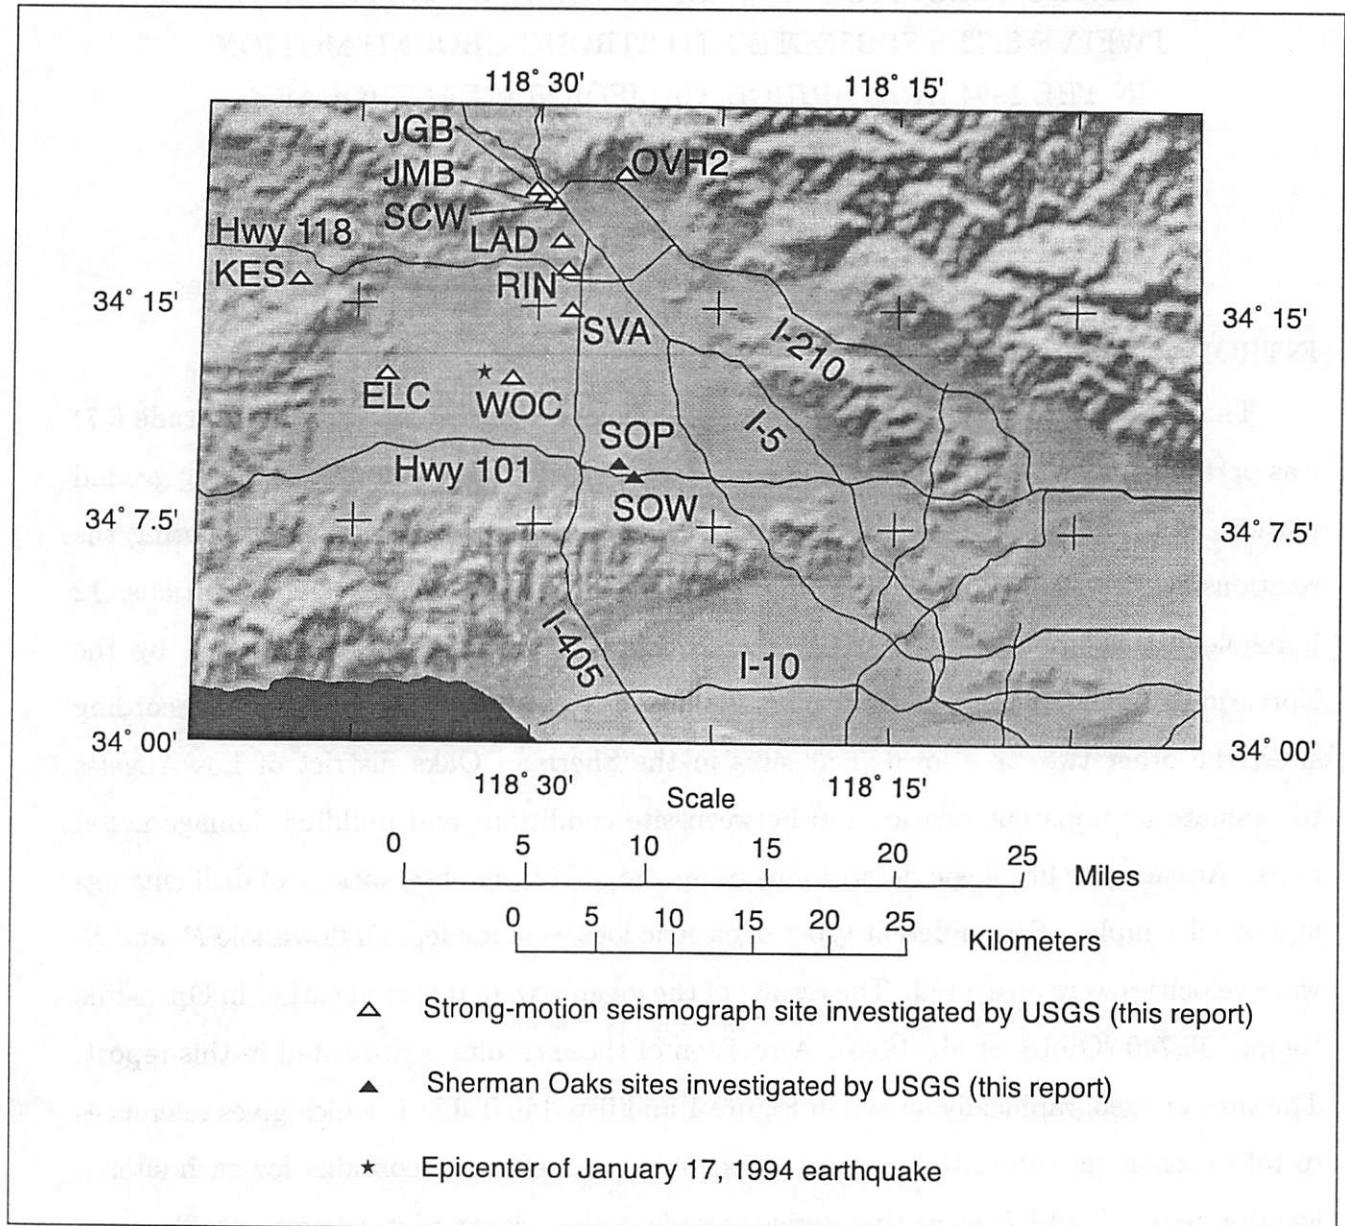


Figure 1. Regional map showing the locations of boreholes (triangles) included in this report. The epicenter of the January 17, 1994, Northridge, California, earthquake is indicated by the star.

TABLE 1. Site Location and peak acceleration data.

Site No	STATION NAME	Borehole LATITUDE	Borehole LONGITUDE	SMA LATITUDE	SMA LONGITUDE	USGS SITE CODE	PEAK ACCEL. (g) HORIZ.	PEAK ACCEL. (g) VERT.	SOURCE, PEAK ACCEL. VALUES
1	Epiphany Lutheran Church	34.2117	118.6051	34.2117	118.6059	ELC	0.46	0.63	Trifunac et al, 1994
2	Jensen Generator Building	34.3130	118.4983	34.3130	118.4979	JGB	0.98	0.52	Porcella et al, 1994
3	Jensen Main Building	34.3111	118.4957	34.3115	118.4955	JMB	0.62	0.40	Porcella et al, 1994
4	Krolls Elem. School	34.2633	118.6664	34.2636	118.6663	KNO	0.94	0.43	Trifunac et al, 1994
5	Los Angeles Dam	34.2931	118.4839	34.2927	118.4839	LAD	0.43	0.32	LRB, 1994
6	Olive View Hospital	34.3281	118.4442	34.3276	118.4443	OVH2	0.91	0.60	Shakal et al, 1994
7	Rinardi Receiving Station	34.2810	118.4771	34.2810	118.4771	RIN	0.84	0.85	LRB, 1994
8	Sepulveda VA Hospital	34.2490	118.4772	34.2490	118.4778	SVA	0.94	0.48	Porcella et al, 1994
9	Sherman Oaks Park	34.1607	118.4394	N/A	N/A	SOP	N/A	N/A	Not an accelerograph site
10	Sherman Oaks Woodman	34.1543	118.4307	N/A	N/A	SCW	N/A	N/A	Not an accelerograph site
11	Sylmar Converter West	34.3117	118.4893	34.3119	118.4894	SCW	0.90	0.64	LRB, 1994
12	White Oak Church	34.2081	118.5171	34.2086	118.5171	WOC	0.51	xx	Trifunac et al, 1994

published in OFR 96-740. The need for these changes was partially motivated by our discovery that the distance from the geophone to the first depth marker (molded to the stress cable) was 4.5 meters instead of 5 meters as assumed in the analysis reported in OFR 96-740. As a consequence, all depth measurements in OFR 96-740 are in error by 0.5 meter. This difference in depth affects only the velocities of the shallow layers, changing the velocities by 5 – 10%; it had little or no effect on the velocities of layers below 10 meter depth. The measurement depths and velocity models have been corrected in this revision.

Another reason for this revision is that when using the ratio of P- and S-wave velocities in OFR 96-740 for the calculation of the dynamic Poisson's ratio σ , some results were out of the accepted range of values (0.0–0.5). The out-of-range Poisson's ratios usually occurred in the top 10 meters where source offset from the borehole (usually 4 meters) is comparable to layer thickness. We will explain some of the possible reasons for the out-of-range values.

1. In OFR 96-740 the velocities reported were determined from P- and S-wave measurements that were made independently, using source locations at different azimuths to the borehole and thus different source-to-receiver paths. The computation of Poisson's ratio, however, assumes the same path for P- and S-waves. Lateral heterogeneities will be particularly important for velocities at shallow depths, and therefore the Poisson's ratios computed assuming a common path may have unacceptable values, even though the P- and S-wave velocities may be well determined for the individual paths. We expect these affects to be most important at shallow depths.
2. Because of the short travel times, errors in picking the arrival times have more influence on the shallow velocities than the deep velocities (especially for P waves). In addition, for some of the models the velocity of the top layer is constrained by a single data point. For these reasons, Poisson's ratios for the shallow layers are more likely to be less well determined than those for the deeper layers.

The influence of these factors may result in a Poisson's ratio that is out of the accepted range of 0.0–0.5. This will occur if $\frac{V_p}{V_s} < 1$ or if $1 < \frac{V_p}{V_s} < \sqrt{2}$, in which case $\sigma \geq 1.0$ or $\sigma < 0$, respectively. Although $\sigma < 0$ is theoretically possible (e.g. Fung, 1968), we decided that our P- and S- velocities should yield σ between 0.0 and 0.5. We made corrections to the velocities using one or more of the following procedures: repicking shallow arrivals

(usually P arrivals because small changes in P travel-times have greater effect on σ), adding a shallow layer, and/or adjusting layer thickness to ensure that Poisson's ratio was in the range 0.0–0.5. In most cases the greatest changes (compared to determination of velocity without consideration of σ) were in the P-wave velocities at shallow depths. Overall, the changes in velocity required to produce acceptable values of σ were small and were only in a few layers. Calculations of Poisson's ratios for the preferred models are contained in Appendix B. Because of items 1 and 2 discussed above, the values in Appendix B may not represent the true Poisson's ratios of the materials at shallow depths.

Finally, we have reassessed layer interfaces on the bases of residuals to the travel-times and correlations with geological and geophysical logs.

The models presented here have been corrected for the refraction effects of the wave-path caused by soil layering. The program takes depths to layer interfaces and observed travel-times and uses an iterative process that accounts for the wave refractions at the layer boundaries for each measurement depth. The differences between the velocities computed in this way and those computed from times corrected to vertical (with no correction for refraction at layer boundaries) are small.

Although the changes to the earlier velocity models are minor, we believe the current models are an improved representation of the borehole data. Appendix C contains figures comparing the new velocity profiles to the previously published results as well as comparing those results to velocity profiles computed from suspension logging for a number of sites. The plots of the suspension logging results include both the "point" measurements (velocities averaged over 1 meter intervals) and averages of those measurements over the depth range of the layers in revised models, where the averages are computed by dividing the depth range by the travel-time over that depth range. For convenience of the reader the material in OFR 96-740 has been included here, so that this report supersedes and replaces OFR 96-740.

REGIONAL GEOLOGIC SETTING

The San Fernando Valley (Figure 2) is one of several east-west-trending, deep, alluviated basins situated within the Transverse Ranges structural province of southern

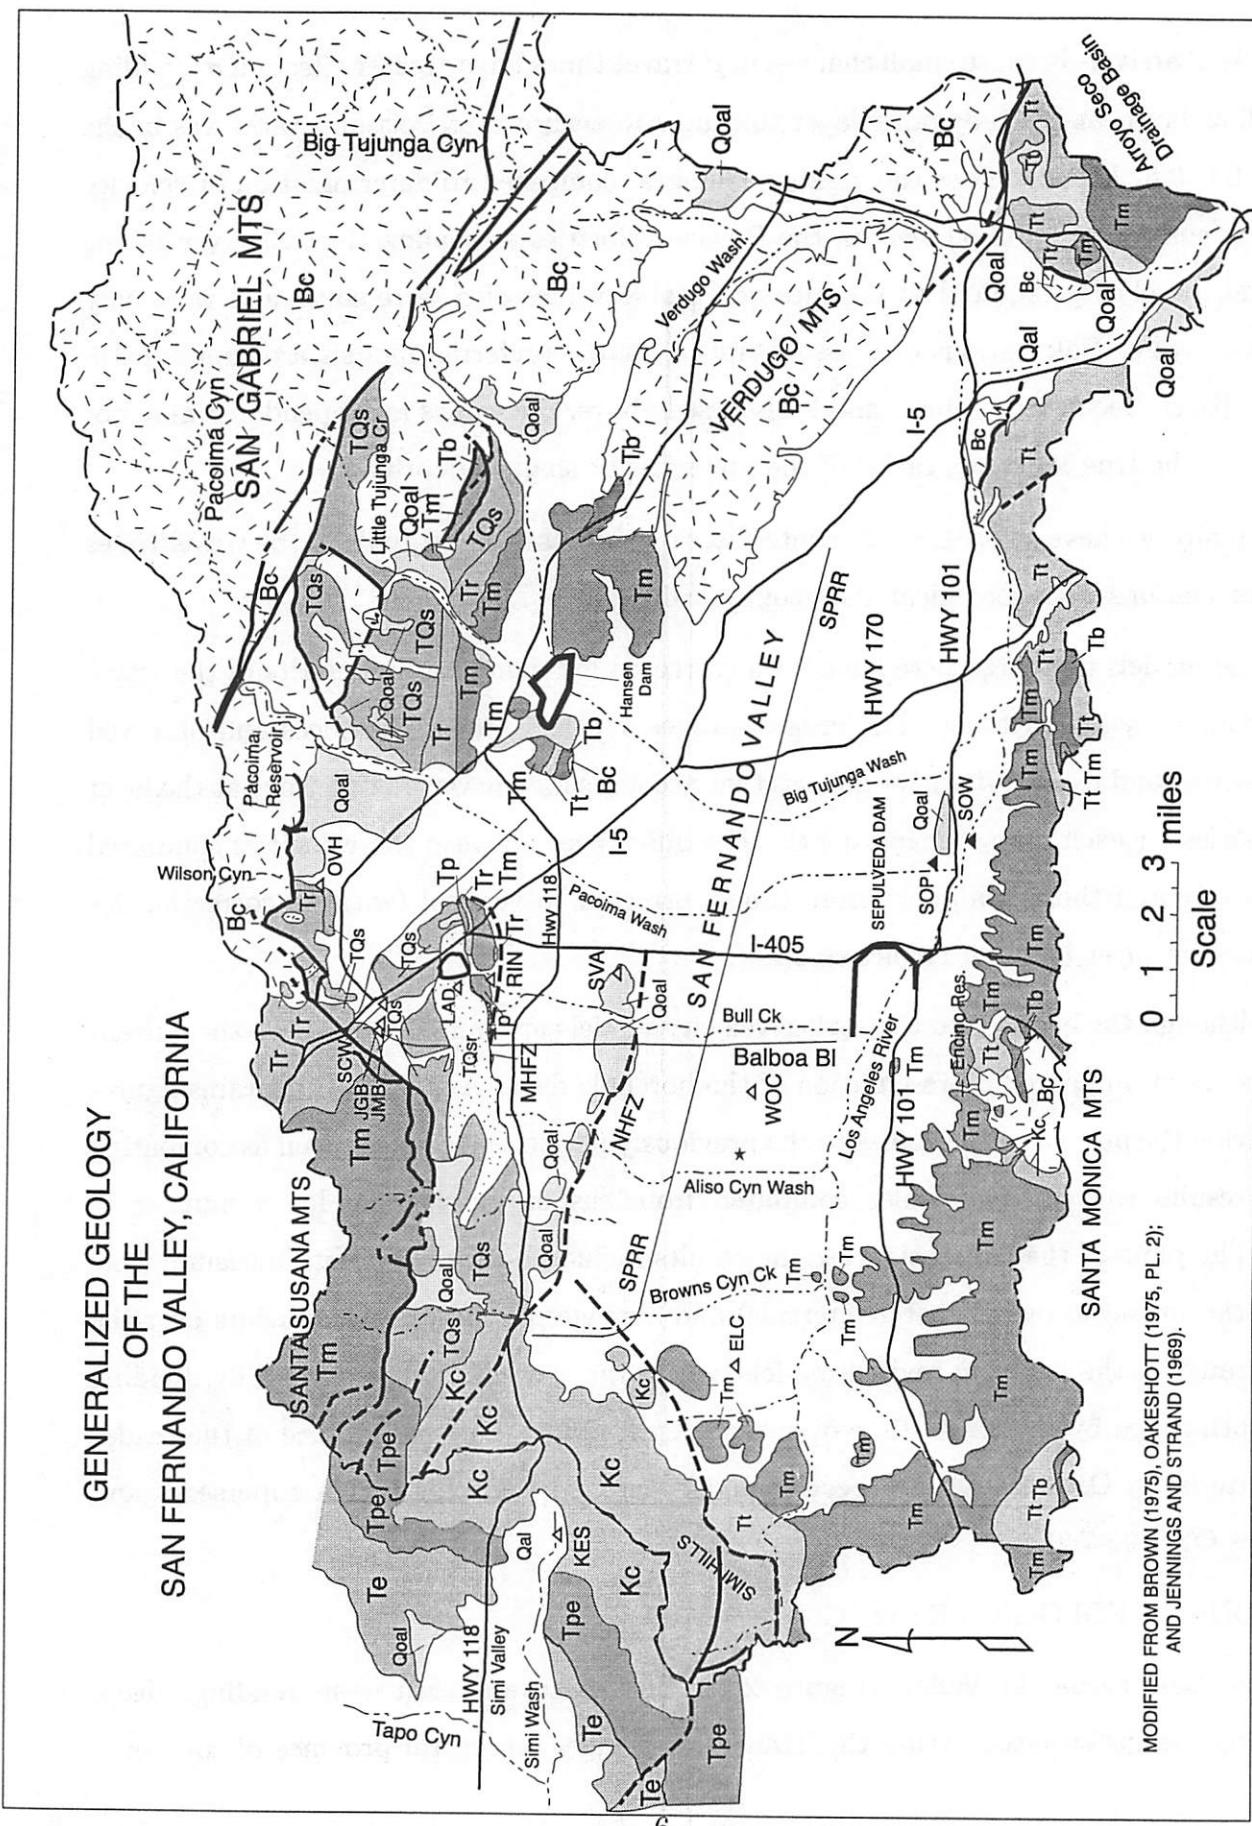


Figure 2. Generalized geologic map of San Fernando Valley. Triangles are borehole locations.

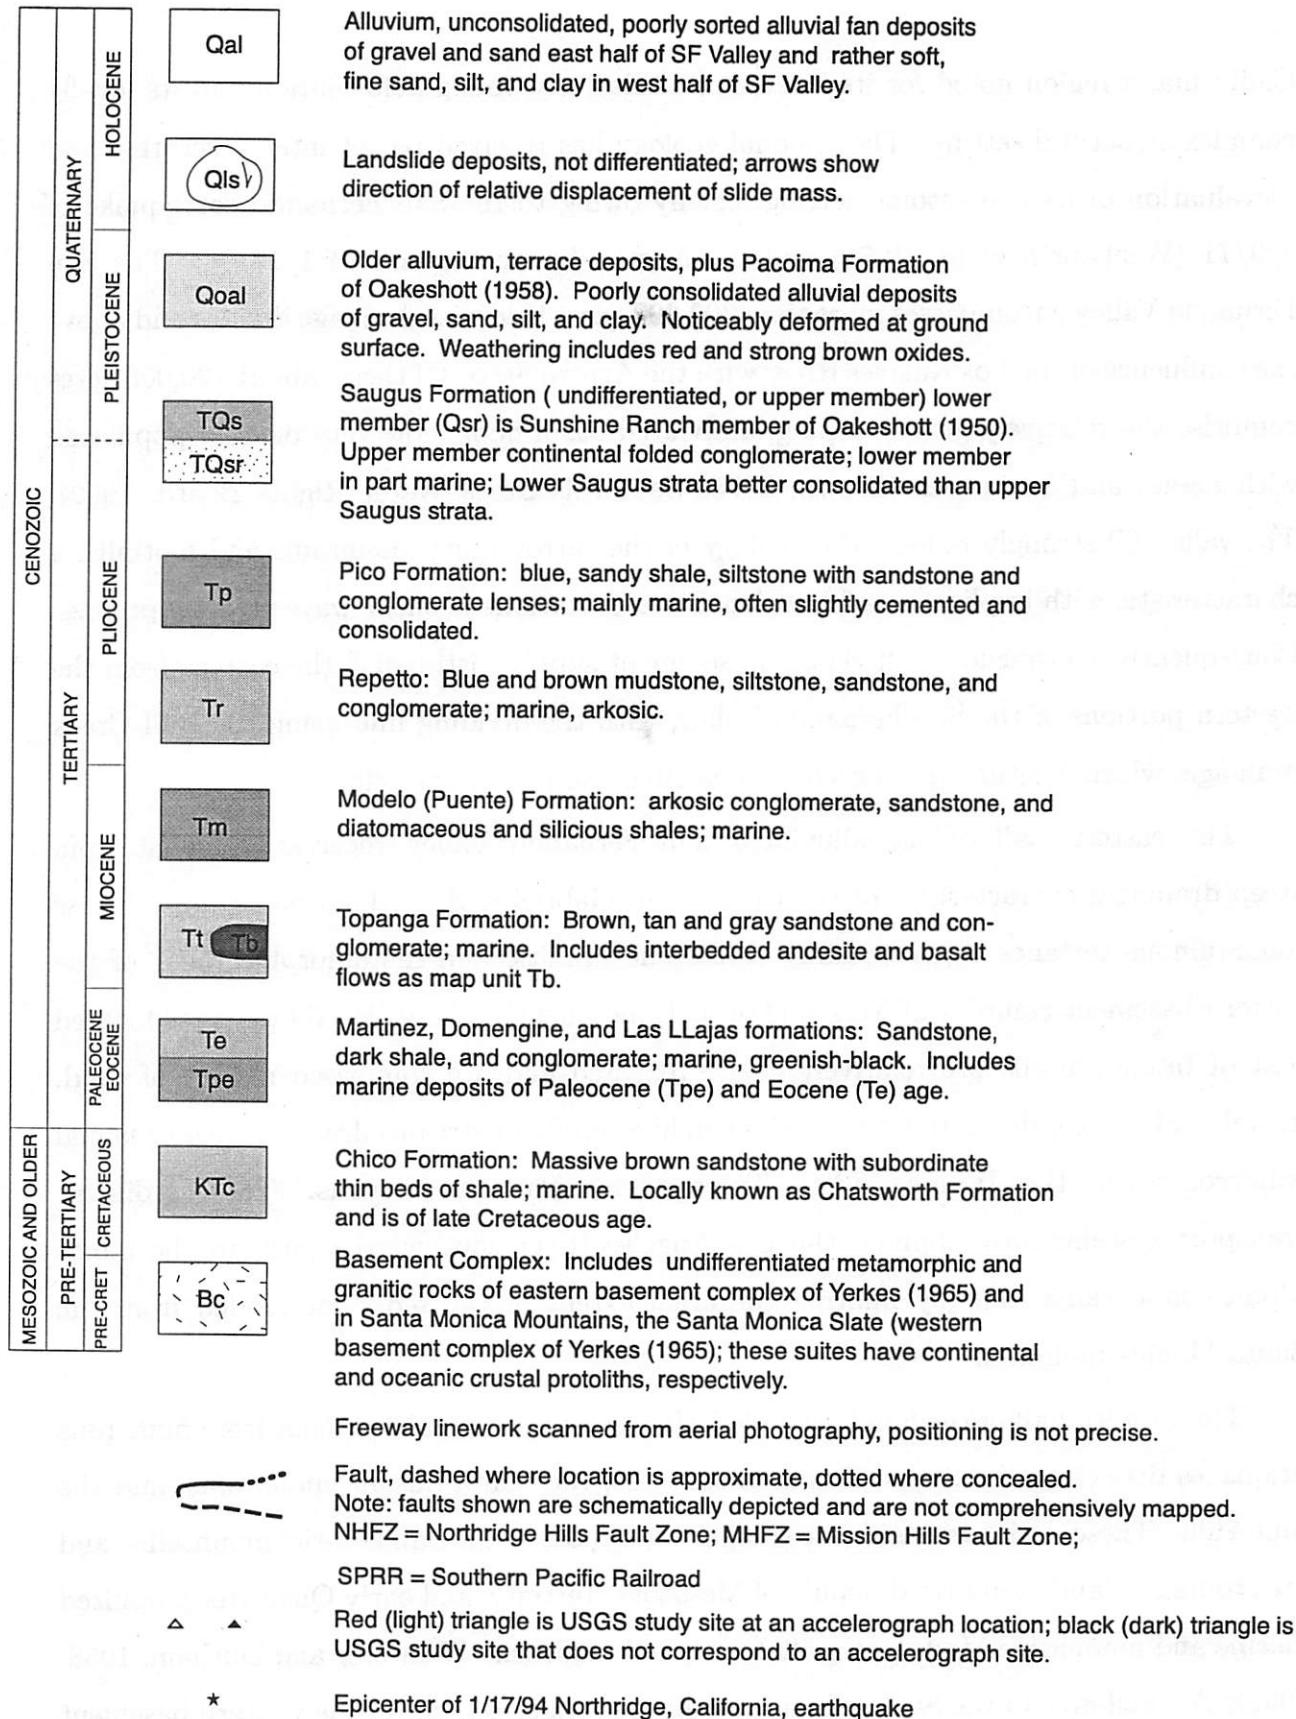


Figure 2. Explanation.

California, a region noted for its intense and relatively young deformation and its locally complex structural setting. The regional geology has received recent intense scrutiny and reevaluation of its neotectonic setting, chiefly owing to the San Fernando earthquake of 2/9/71 (Wentworth et al., 1971) and the Northridge earthquake of 1/17/94. The San Fernando Valley encompasses more than 300,000 acres below its drainage divides and above the confluence of the Los Angeles River with the Arroyo Seco. Of these, about 120,000 acres comprise the relatively gently sloping, alluviated basin floor, now very densely populated with homes and businesses (Brown, 1975; California State Water Rights Board, 1962). The valley fill strongly reflects the geology of the surrounding mountains and foothills, a characteristic with implications for regional interpretations of shear-wave velocity profiles. Consequently, conspicuous differences in sediment supply distinguish the eastern from the western portions of the San Fernando Valley, with the dividing line being the Bull Creek drainage, which is situated between Balboa Blvd. and Interstate 405.

The eastern half of the alluviated San Fernando Valley receives sediment from steep drainages characteristic of the rugged San Gabriel and Verdugo mountains. These mountainous terranes expose mainly crystalline granitic and metamorphic rocks of the eastern basement complex of Yerkes (1965). Consequently, the valley fill deposits located east of Interstate 405 are relatively coarse-textured and are comprised mainly of sand, gravel, and cobbles deposited by the powerful high-gradient streams draining such principal watercourses as Big Tujunga, Little Tujunga, and Pacoima canyons. These sediment transport systems have shunted the Los Angeles River southward nearly to the Santa Monica mountains, thereby limiting the areal extent of the sediment eroded from the Santa Monica mountains.

The western half of the San Fernando Valley receives alluvial sediment from numerous drainages dissecting the Santa Monica mountains, the Santa Susana mountains, and the Simi Hills. These drainage basins are smaller than those of the San Gabriel mountains, and are eroding uplands comprised mainly of Mesozoic, Tertiary, and early Quaternary uplifted marine and nonmarine sandstones, siltstones, and mudrocks (Winterer and Durham, 1958, 1962). A small area of the Santa Monica mountains exposes rocks of the western basement complex of Yerkes *et al.* (1965) locally represented by the Santa Monica slate. The alluvial

deposits thus are significantly more fine-textured at most localities west of Interstate 405 compared to those east of Interstate 405. The western portion of the valley contains significant occurrences of very shallow ground water (California State Water Rights Board (1962); Tinsley *et al.* (1985), Tinsley and Fumal (1985)). Areas characterized by high sedimentation rates owing to persistent overbank flooding and fine-grained debris-flows (relatively common events prior to implementation of flood control measures in the western San Fernando Valley [King *et al.*, 1981]) and a persistence of shallow ground water are distinguished by relatively low values of shear strength and contained the lowest shear-wave velocities we measured in this study.

ACCELEROGRAPH SITES AND AREAL GEOLOGY

The sites we investigated and herein report comprise a relevant set of data for exploring aspects of site dependent effects of the Northridge earthquake. However, we caution that these sites do not encompass a complete sampling of the region's varied geology. Six sites occur on recent alluvium deposited by streams draining Cretaceous and Tertiary marine sediments. Of these, five sites are located on relatively fine-textured surficial deposits (chiefly well-bedded sequences composed of poorly consolidated, loose to slightly dense silty sand, sandy silt, silt, and clayey silt) in the western half of the San Fernando Valley (ELC, RIN, WOC), and in the south-central San Fernando Valley (SOP, SOW), and one site is located in southeasternmost Simi Valley (KES) on sand and silt deposits derived from the Cretaceous Chatsworth Formation, (the sedimentary rock that forms the visually impressive brown-weathering sandstone that crops out in the northwestern San Fernando Valley and eastern Simi Valley areas). About 12 meters of Quaternary sediment overlies the Cretaceous bedrock at this point in Simi Valley. At one site (SVA), Pleistocene sandy and silty alluvial deposits overlie strata of the Saugus Formation or its stratigraphic equivalent.

Boreholes drilled at three sites (JMB, JGB, SCW) penetrated various thicknesses of fill and soft Holocene alluvial deposits before encountering the Saugus Formation of Winterer and Durham (1962). The Los Angeles Dam (LAD) site is the only site we investigated that was within the lower (Sunshine Ranch) member of the Saugus Formation; shear-wave velocities for the LAD site are higher than those measured in the other Saugus Formation

sites. The 12th site was located at Olive View Hospital (OVH2), in coarse, gravelly alluvial fan deposits derived from Wilson Canyon, which drains granitic and metamorphic rocks of the San Gabriel mountains. This site is the only site on deposits typical of much of the eastern half of the San Fernando Valley.

GEOLOGIC AND GEOPHYSICAL LOGS

Generalized logs of earth materials underlying the drill sites were prepared from (1) mud logs of cuttings that were noted during drilling, (2) "undisturbed" samples obtained using a Pitcher sampler (which provided glimpses of the materials encountered at depth), and (3) a suite of geophysical logs (spontaneous potential, resistivity, caliper, and natural gamma ray logs; these logs are not included here, but will appear in a later report) obtained prior to installing and grouting the casing in the borehole. From these logs we can delineate the thickness and character of basin alluvial deposits and underlying bedrock. Electric logs enable findings to be extrapolated to other parts of the basin and to other basins in southern California. Physical properties noted in the abbreviated descriptions include; depth, color, texture or lithology of alluvial deposits, probable geologic age, and correlation with regionally mapped geologic units.

P- AND S-WAVE TRAVEL-TIME DATA

Shear waves were generated at the ground surface by an air-powered horizontal ram (Liu, *et al.*, 1988) striking an anvil at either end of an aluminum channel 2.3 m long. The ram was driven first in one direction and then in the other to generate pulses of opposite polarity. A switch attached to the shear source triggered the recorder and established the reference for the timing of arrivals. *P*-waves were generated by striking a steel plate with a sledge hammer. The recorder was triggered by a switch attached to the handle of the sledge hammer. *P*- and *S*-wave sources were offset from the borehole (same horizontal distance but different locations) to minimize the effect of waves traveling down the grout surrounding the casing. The offset was 4 m at all sites except Jensen Main Building, where it was 5 m.

Downhole measurements were made at 2.5 m intervals (starting at 2 meters depth) with a three-component geophone clamped to the casing by an electrically-activated lever

arm. A second three-component geophone was placed on the surface 5 to 10 m from the shear source for recording an on-scale reference trace (useful for amplitude studies and timing verification). The data were recorded on diskettes using a 12-channel recording system.

DETERMINING VELOCITY PROFILES

The procedure for determining velocities is summarized in Figure 3. Because the orientation of the downhole geophone could not be controlled when moving from one depth to the next, the azimuth of the horizontal geophones relative to the source was unknown and changed with depth. To minimize the effects of those changes, the horizontal components were rotated to the direction that maximized the integral square amplitude within a time interval containing the shear wave (Boatwright *et al.*, 1986). *P*- and *S*-wave arrival-times were determined from the time series displayed at each depth on a 20-inch computer screen. The *P*-wave arrival-time was obtained from the vertical trace, and the *S*-wave arrival-times were obtained from the average of the rotated horizontal traces for ram strikes in opposite directions. The arrivals were timed to the nearest millisecond, probably a realistic precision for clear arrivals uncontaminated by noise.

A trial set of layer boundaries was chosen for the *S*-wave model, based on the lithologic descriptions and geophysical logs. The travel-time data were fit in a least-squares sense by a model made up of constant velocity layers, taking into account refraction across the interfaces between layers (program VELSLANT, available on request from the authors). The travel times were weighted by the inverse of an assigned normalized variance. A normalized standard deviation of 1 was assigned to the clear arrivals and values up to 5 were assigned to the others. The residuals were examined, and layer boundaries were added, if necessary, to reduce large residuals or to remove systematic trends in the residuals. This was an iterative process conducted by the team of authors of this report. The process continued until the team was satisfied that the interfaces were consistent with the borehole seismic data as well as the geological and geophysical logs. The *P*-wave travel time data were analyzed initially with the set of layer boundaries finally determined for the *S*-wave data. Layer boundaries were then added if needed to fit the data and deleted if not needed.

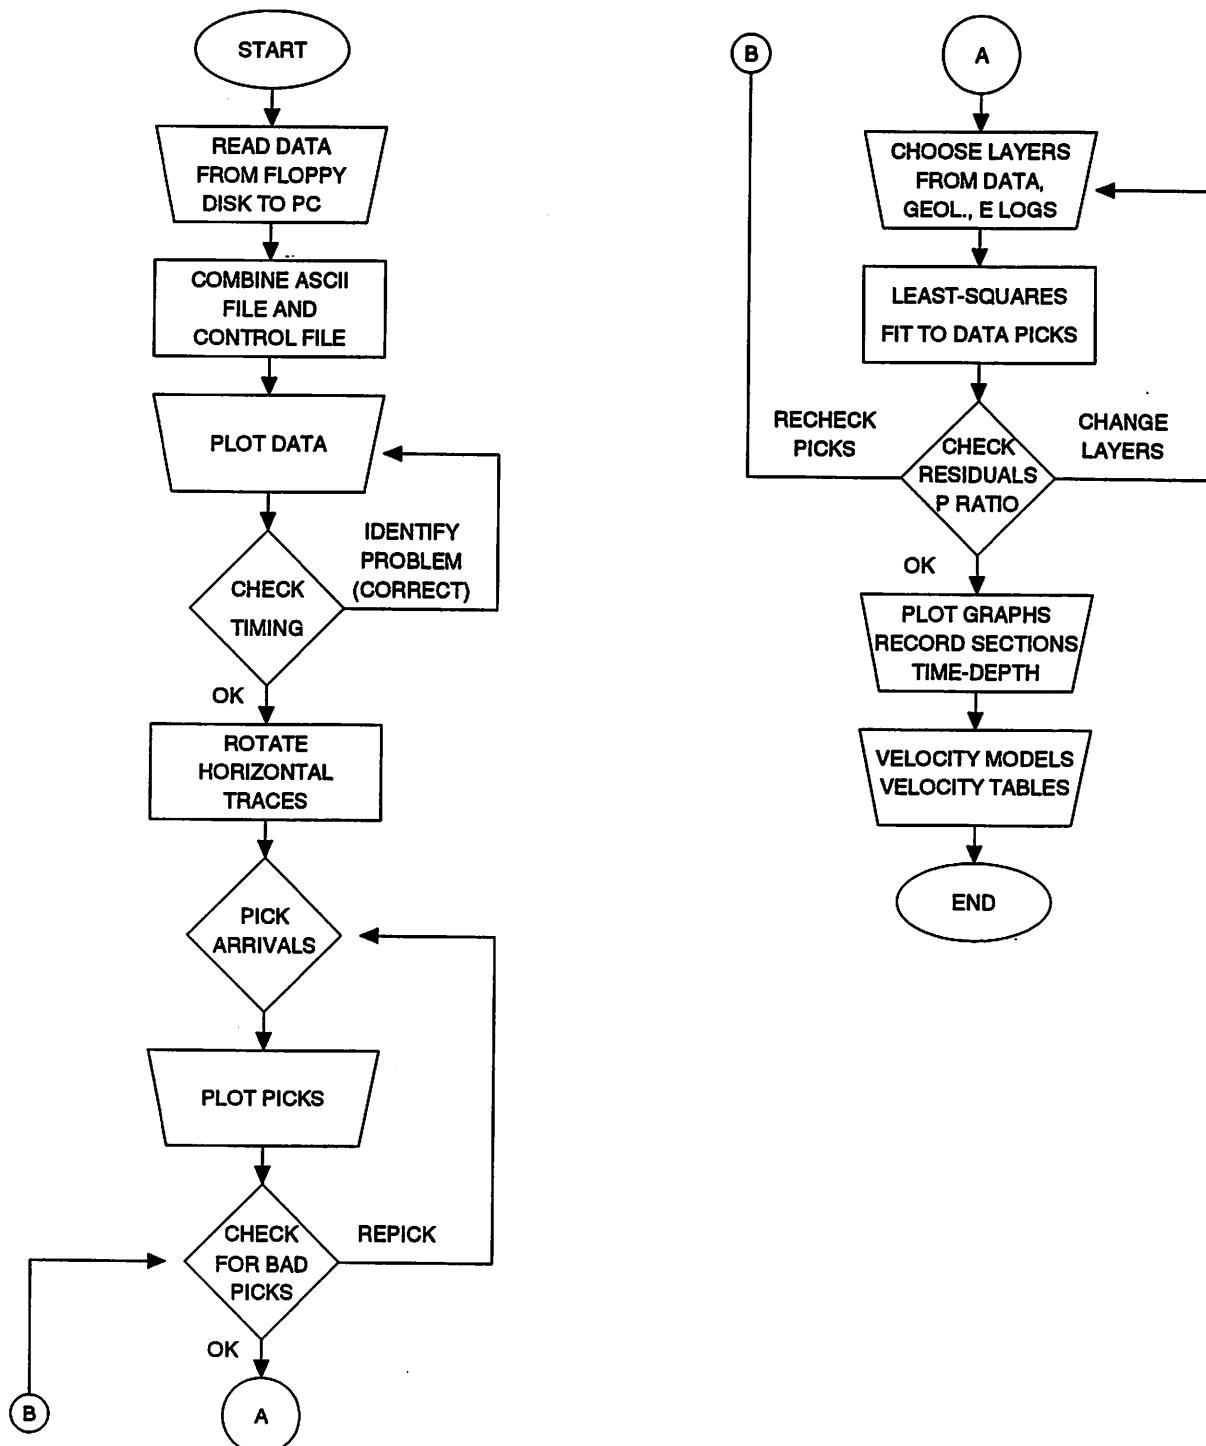


Figure 3. Flow-chart outlining the data processing and steps in the interpretation.

Commonly, an additional layer boundary corresponding to the top of the zone of water saturation was needed to fit the *P*-wave data. *P*- and *S*-wave profiles for all twelve holes are plotted in Appendix A. The upper and lower bounds on the plots show approximate 68 percent confidence limits. The bounds are not symmetrical because they are based on the inverse velocities in the layers.

SUMMARY VELOCITY PROFILES

Figures 4-6 show the *S*-wave velocity profiles determined from the borehole measurements at the twelve sites. The velocity profiles are plotted at the same scale for ease of comparison. Figures 7-9 show the *P*-wave velocity profiles for the same sites as Figures 4-6, respectively.

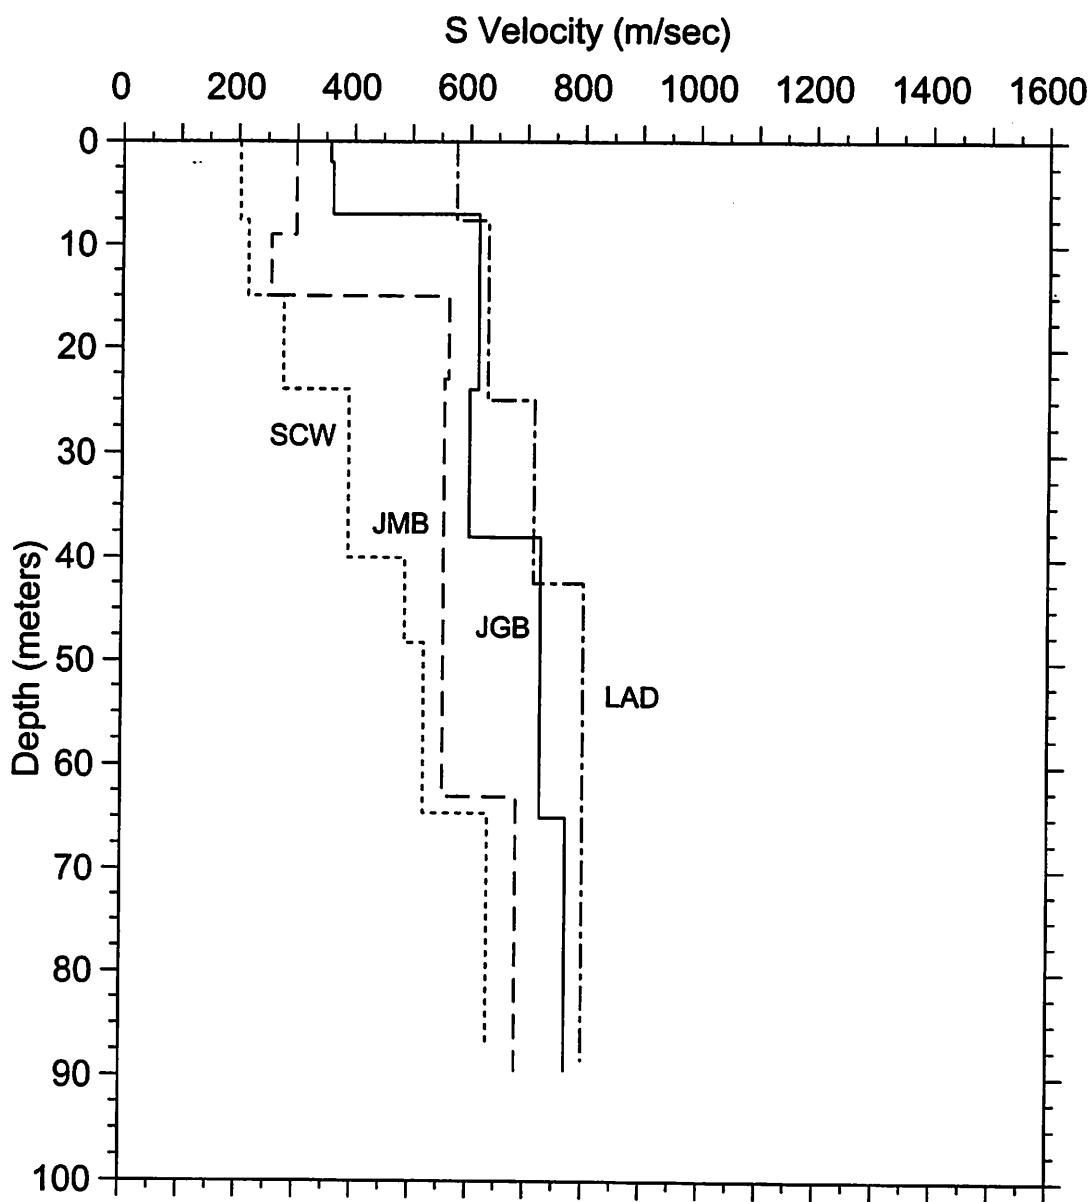


Figure 4. S-wave velocity models shown on the same figure for comparison. Sites JMB, JGB and SCW have various thicknesses of fill and soft Holocene alluvial deposits above the Saugus Formation. LAD is the only site we investigated within the lower (Sunshine Ranch) member of the Saugus Formation.

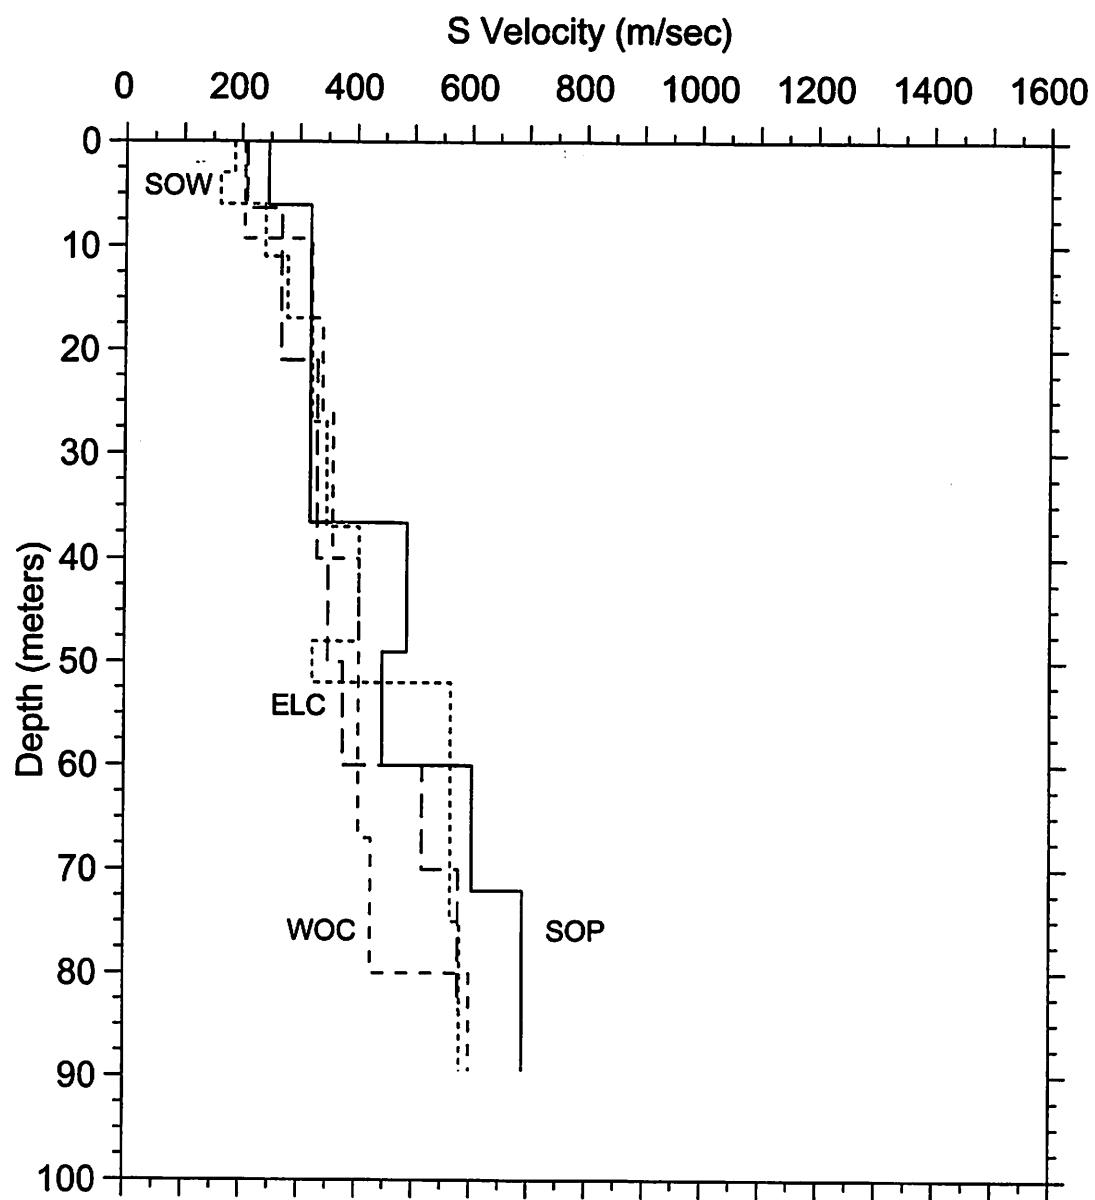


Figure 5. S-wave velocity models shown on the same figure for comparison. These sites all start in relatively soft, fine-textured Holocene alluvial deposits of the Los Angeles River and its tributaries in the San Fernando Valley. Drill holes apparently bottomed in Tertiary marine sedimentary rock (shales, siltstones).

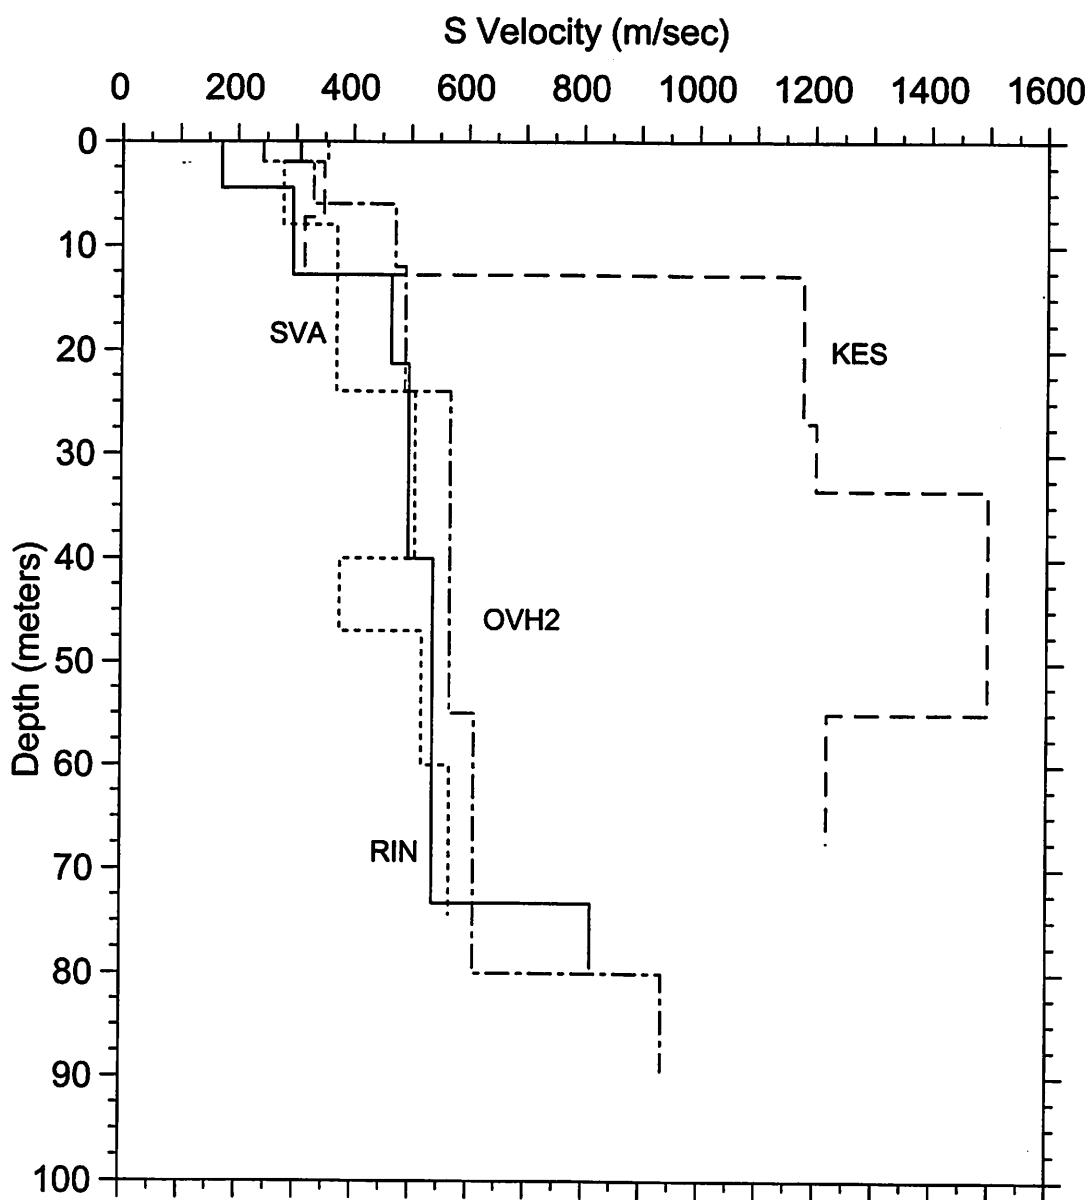


Figure 6. S-wave velocity models for sites KES, OVH, RIN and SVA. All sites are drilled in sandy or coarser-textured alluvium. At RIN, the drillhole bottomed in marine Tertiary mudstone; at KES, in Cretaceous marine sandstone; at OVH2 and SVA, in nonmarine Saugus(?) Formation or its possible equivalent.

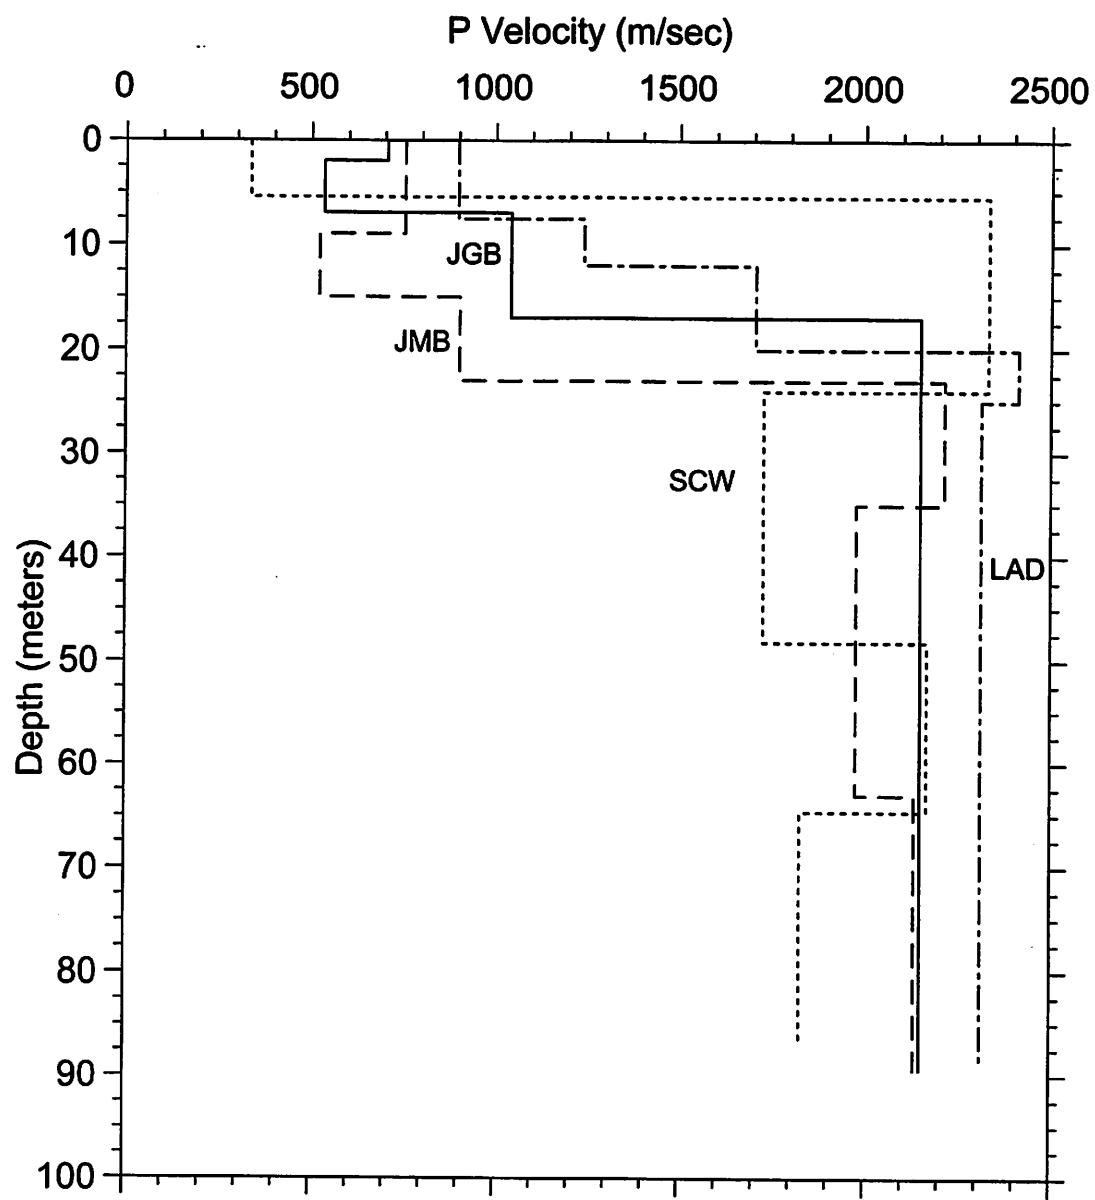


Figure 7. P-wave velocity models shown on the same figure for comparison.

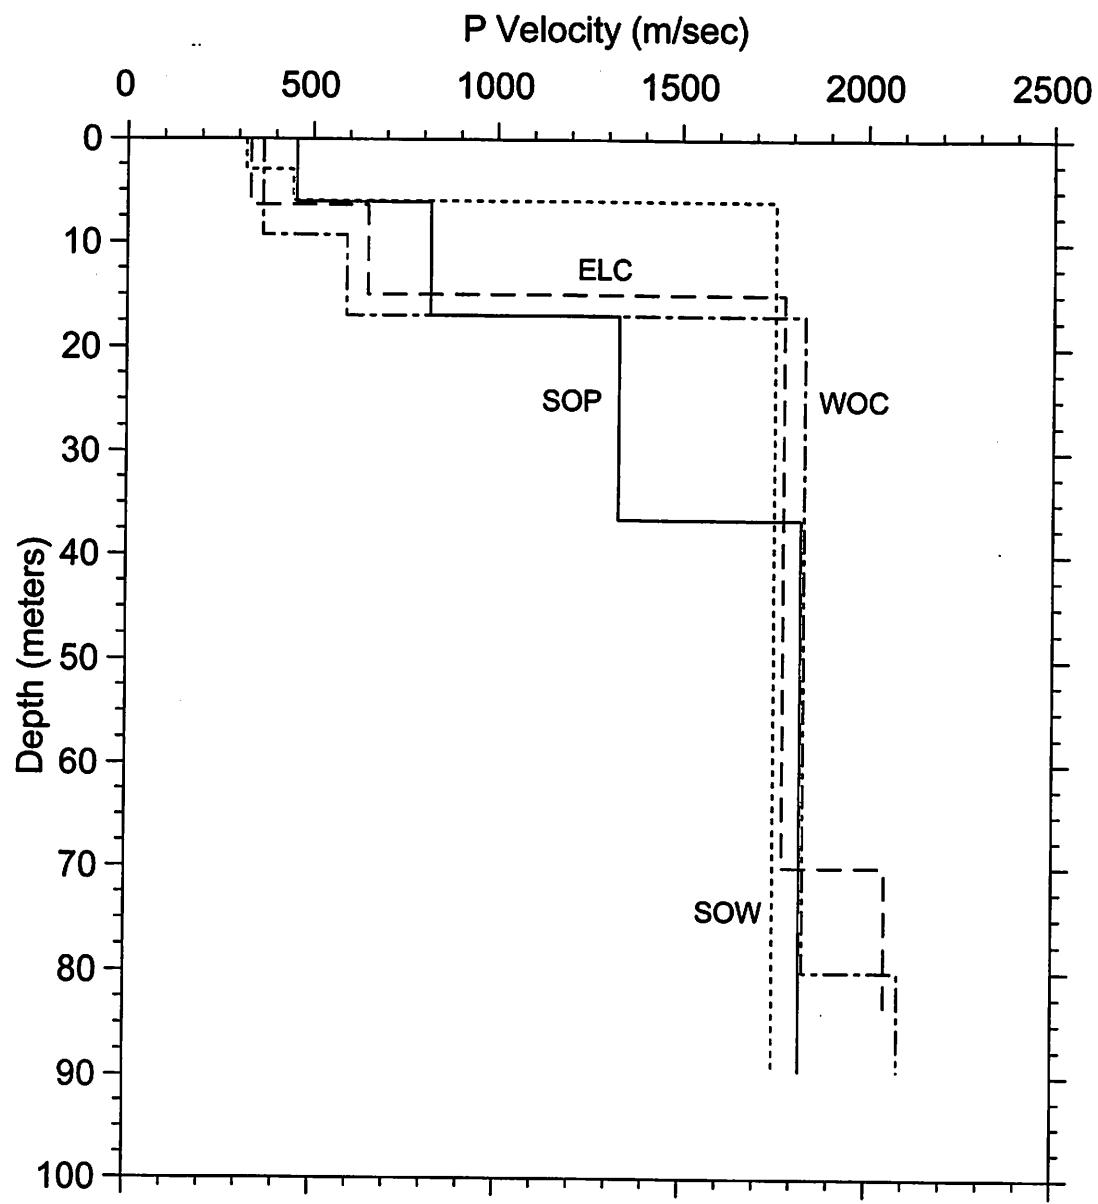


Figure 8. P-wave velocity models shown on the same figure for comparison.

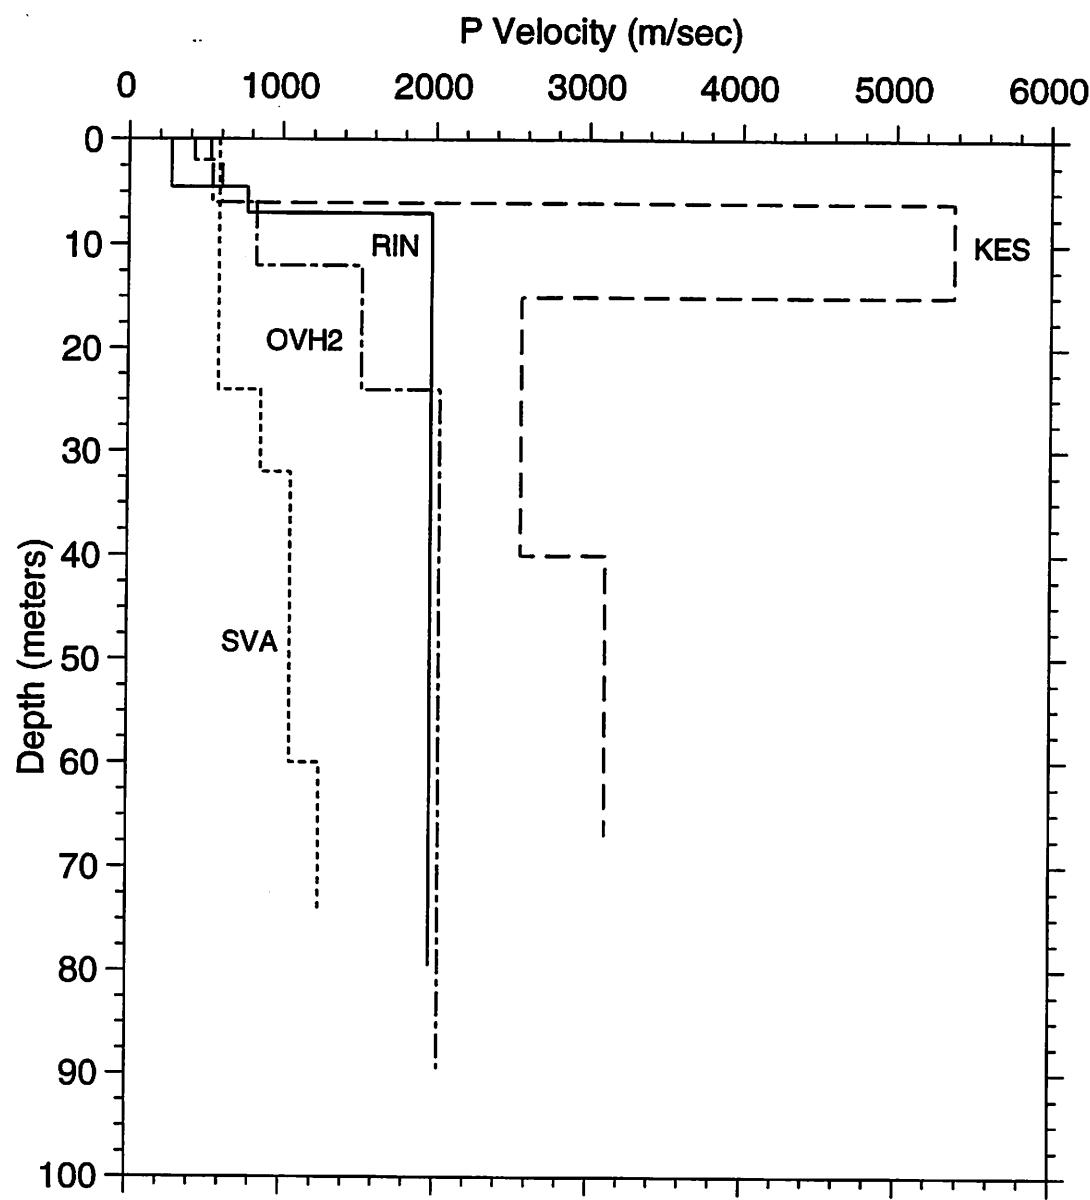


Figure 9. P-wave velocity models shown on the same figure for comparison.

ACKNOWLEDGMENTS

We are grateful to a large number who made this work possible by helping us gain access to the sites and permission to do the studies. These people include Mrs. Perry C. Norman, Mr. Bob Lancaster, Mr. Ezra Safdie, Mr. Ed Amador and Mr. Robert Bankseser (Sepulveda VA Hospital); Mr. Richard J. Proctor, Mr. Joe Vanderhorst, Mr. Ezell Culver of the Metropolitan Water District of Southern California (Jensen Main Building and Jensen Generator Building sites); Mr. Ron Tognazzini, Mr. Brent Hollingworth, Mr. Don Schauer, Mr. Jeff Owen, and Dr. Craig Davis of the Los Angeles Department of Water and Power (Rinaldi Receiving Station, Sylmar Converter West, and Los Angeles Dam); Mr. Mario Sewell, Mr. Brent McSwain, and Ms. Wendy Wilkinson of the Los Angeles City Recreation and Parks (Sherman Oaks Park); Ms. V. Carlsen and Mr. Robert Lambert (Epiphany Lutheran Church); Ms. Brooke Wolford and Ms. Cindy Trull of the Bank of America and Mr. Frank Adelman (White Oak Church site); Mr. Il Kim, Mr. Ed Teran, Mr. Alphonso Bragg, (Sherman Oaks Woodman); Mr. David Kanthak and Mr. Gary Nottingham of Simi Valley Unified School District (Knolls Elementary School); Dr. Anthony Shakal and Dr. Robert Darragh of California Division of Mines and Geology (Olive View Hospital site); Mr. Ronald Porcella and Mr. Richard Maley of the U.S. Geological Survey (Jensen Main Building, Jensen Generator Building and Sepulveda V.A. Hospital); Prof. Mihailo Trifunac of the University of Southern California (White Oak Church, Epiphany Lutheran Church, and Knolls Elementary School sites).

We also thank Mr. Robert Westerlund and Mr. Joel Johnson of the U.S. Geological Survey for their help with the *S*- and *P*-wave logging.

Mr. John Singer of the U.S. Geological Survey's Water Resources Division provided drilling and electric logging services at 9 sites; Pitcher Drilling Company of East Palo Alto, California, and Welenco Inc. of Bakersfield, California, provided drilling and electric logging at 3 sites.

Dr. Cliff Roblee supplied the suspension logging data. These data were obtained by the ROSRINE project and are available from their web site (<http://rccg03.usc.edu/rosrine/>).

REFERENCES

- Boatwright, John, Porcella, R., Fumal, T., Liu, Hsi-Ping, 1986, Direct estimates of shear wave amplification from a borehole near Coalinga, California: *Earthquake Notes*, v. 57, p. 8.
- Brown, Glenn A., 1975, Ground water geology of the San Fernando Valley, *in* San Fernando, California, Earthquake of 9 February 1971: California Division of Mines and Geology Bulletin 196, p. 31-51.
- California State Water Rights Board, 1962, Report of Referee, City of San Fernando, California Superior Court, County of Los Angeles, no. 650079: California State Water Rights Board, Text and Plates, v. 1, 258 p.
- Fumal, Thomas E., Gibbs, James F., and Roth, Edward F., 1982, In-situ measurements of seismic velocities at 22 locations in Los Angeles, California Region: U.S. Geological Survey, Open-File Report 82-833, p. 29.
- Fung, Y. C., 1968, *Foundations of Soil Mechanics*, Prentice Hall, Englewood Cliffs, NJ, p. 353.
- Gibbs, James F., Tinsley, John C., and Joyner, William B., 1996, Seismic velocities and geological conditions at twelve sites subjected to strong ground motion in the 1994 Northridge, California, earthquake: U.S. Geological Survey, Open-File Report 96-740, 103 p.
- Jennings, C.W., and Strand, R.G., 1969, Geologic map of California, Los Angeles sheet: Olaf P. Jenkins edition, (scale 1:250000).
- King, E.J., Tinsley, J.C. and Preston, R.F., 1981, Map showing historic flooding in the San Fernando Valley, California 1934 to 1956: U.S. Geological Survey, Open-File Report 81-153, 5p., 7 plates (scale 1:24000).
- Lindvall Richter Benuska, 1994, Processed LADWP power system strong- motion records from the Northridge, California Earthquake of January 17, 1994: Los Angeles Division of Water and Power, LRB No. 007-027.
- Liu, Hsi-Ping, Warrick, Richard E., Westerlund, Robert E., Fletcher, Jon B. and Maxwell, Gary L., 1988, An air-powered impulsive shear-wave source with repeatable signals: *Bull. Seism. Soc. Am.* v. 78, p. 355-369.
- Oakeshott, G.B., 1950, Geology of the Placerita oil field, Los Angeles County, California: *California Journal of Mines and Geology*, v. 46, p. 43-80.
- Oakeshott, G.B., 1958, Geology and mineral deposits of San Fernando Quadrangle, Los Angeles County, California: California Division of Mines and Geology Bulletin 172, 147 p.
- Oakeshott, G.B., editor, 1975, San Fernando, California, earthquake of 9 February 1971: California Division of Mines and Geology Bulletin 196, Plate 2.
- Porcella, R.L., Etheredge, E.C., Maley, R.P., and Acosta, A.V., 1994, Accelerograms recorded at USGS national strong-motion network stations during the $M_s = 6.6$ Northridge, California, earthquake of January 17, 1994: U.S. Geological Survey, Open-File Report 94-141, 100 p.

- Shakal, A., Huang, M., Darragh, R., Cao, T., Sherburne, R., Malhotra, P., Cramer, C., Sydnor, R., Graizer, V., Maldonado, G., Petersen, C. and Wampole, J., 1994, CSMIP strong-motion records from the Northridge, California, earthquake of January 17, 1994: California Div. of Mines and Geology, Report No. OSMS 94-07.
- Tinsley, J.C., and Fumal, T.E., 1985, Mapping Quaternary sedimentary deposits for areal variations in shaking response, *in* Ziony, J.I., ed., Evaluating earthquake hazards in the Los Angeles region, an earth science perspective: U.S. Geological Survey Professional Paper 1360, p. 101-125.
- Tinsley, J.C., Youd, T.L., Perkins, D.M. and Chen, A.T.F., 1985, Evaluating liquefaction potential, *in* Ziony, J.I., ed., Evaluating earthquake hazards in the Los Angeles region, an earth science perspective: U.S. Geological Survey Professional Paper 1360, p. 263-315.
- Trifunac, M.D., Todorovska, M.I., and Ivanović, S.S., 1994, A note on distribution of uncorrected peak ground accelerations during the Northridge, California, earthquake of 17 January 1994: Soil Dynamics and Earthquake Engineering, 13(3), p. 187-196.
- Wentworth, Carl M., Yerkes, R.F., and Allen, Clarence R., 1971, Geologic setting and activity of faults in the San Fernando area, California, *in* The San Fernando, California, earthquake of February 9, 1971: USGS Professional Paper 733, p. 6-16.
- Winterer, E.L., and Durham, D.L., 1958, Geologic map of a part of the Ventura basin, Los Angeles County, California: U.S. Geological Survey Oil and Gas Investigations Map OM-196, 1 plate.
- Winterer, E.L., and Durham, D.L., 1962, Geology of a part of the southeastern Ventura basin, Los Angeles County, California, *in* Shorter contributions to general geology 1958, U.S. Geological Professional Paper 334-H, p. 275-366.
- Yerkes, R.F., McCulloh, T.H., Schoellhamer, J.E., and Vedder, J.G., 1965, Geology of the eastern Los Angeles Basin, southern California, an introduction: U.S. Geological Survey Professional Paper 420-A, 57 p.

APPENDIX—A
Detailed Results

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

CANOGA PARK QUADRANGLE
CALIFORNIA-LOS ANGELES CO
7.5 MINUTE SERIES (TOPOGRAPHIC)

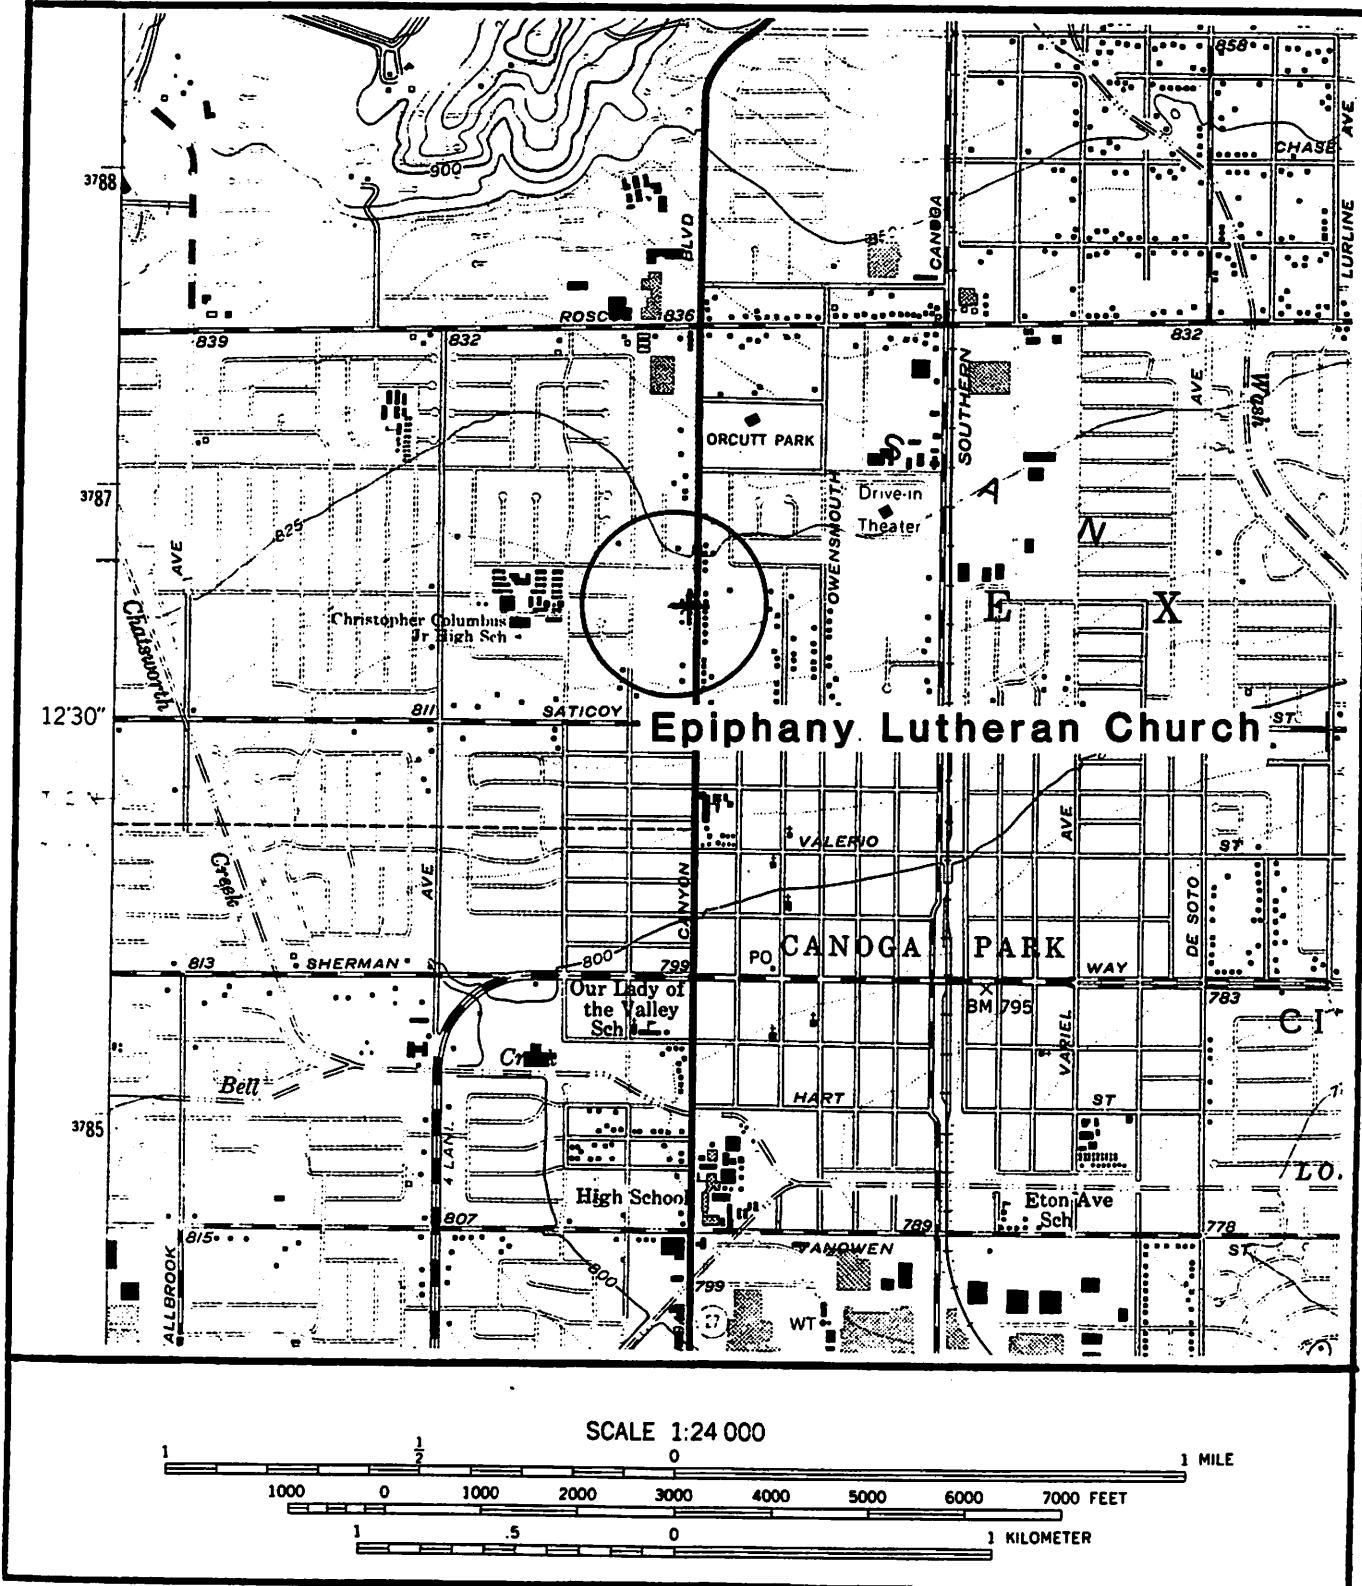


Figure A-1. Site location map for the borehole at Epiphany Lutheran Church. The accelerograph is located approximately 50 meters from the borehole.

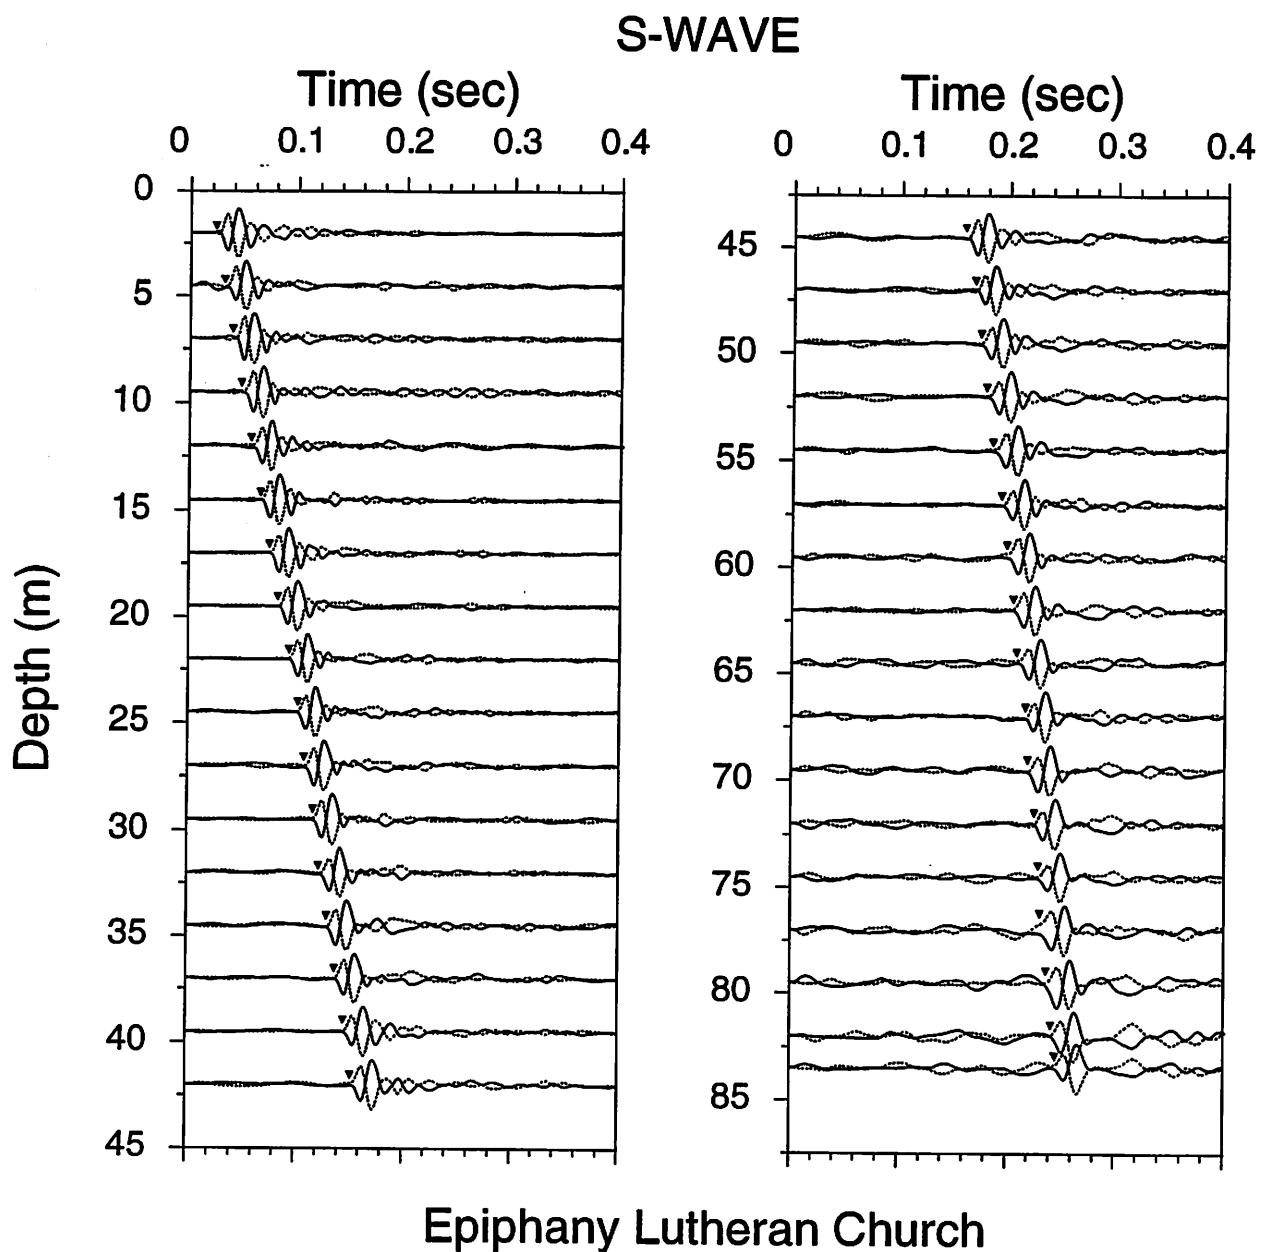


Figure A-2. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

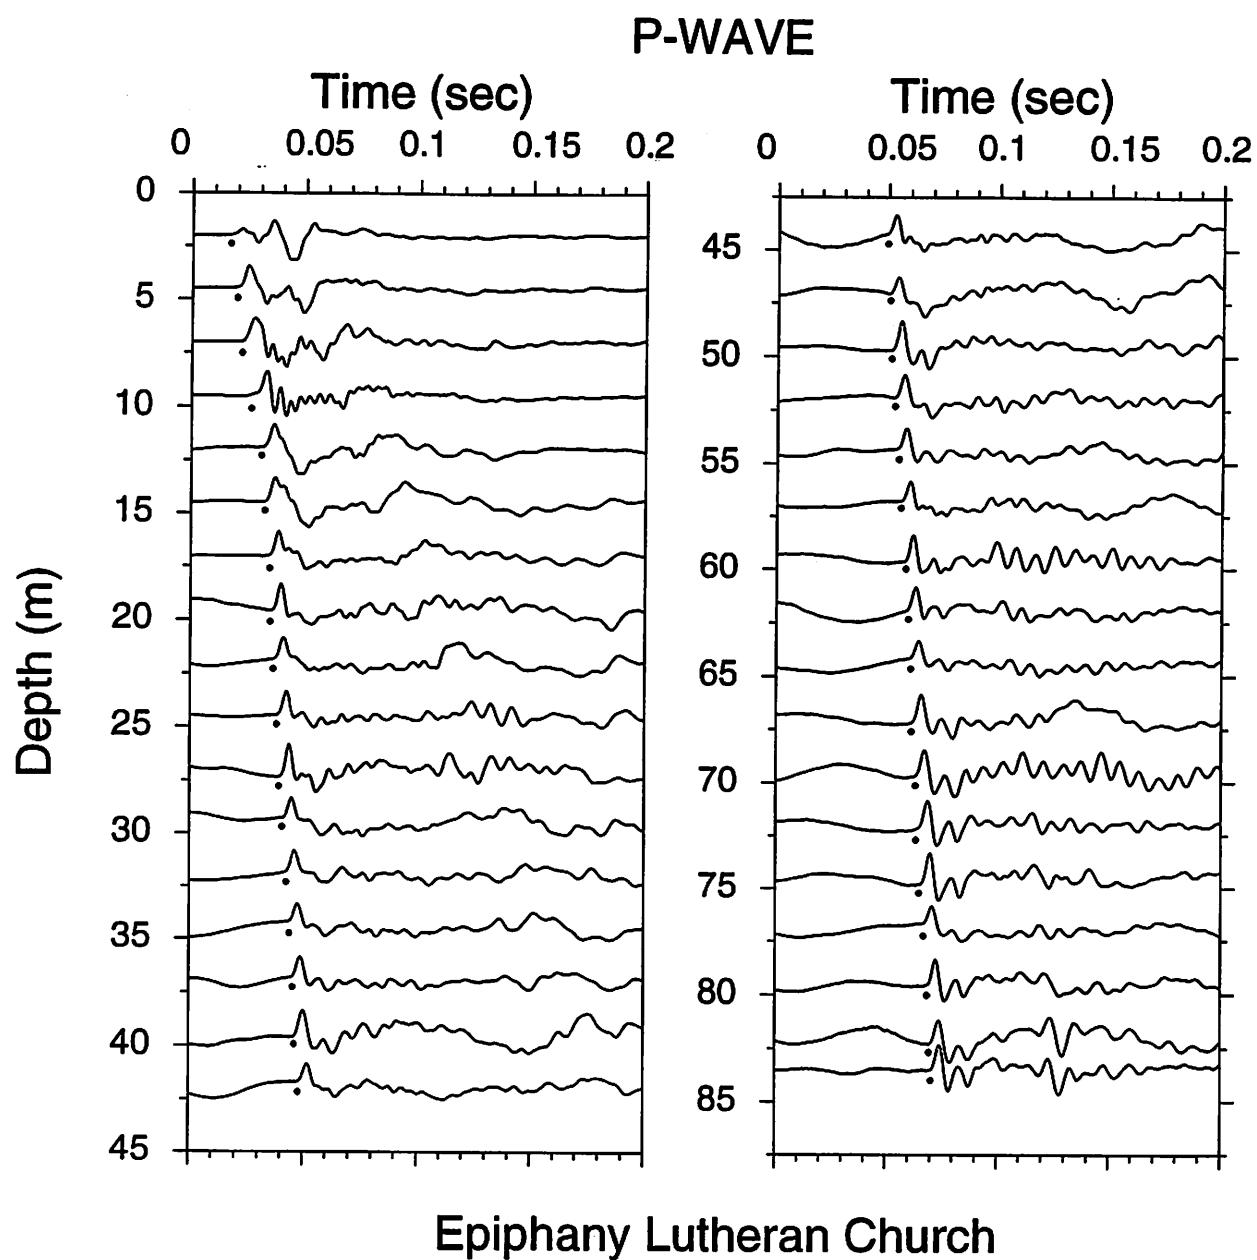


Figure A-3. Vertical component record section. Approximate P-wave arrivals are indicated by the solid circles.

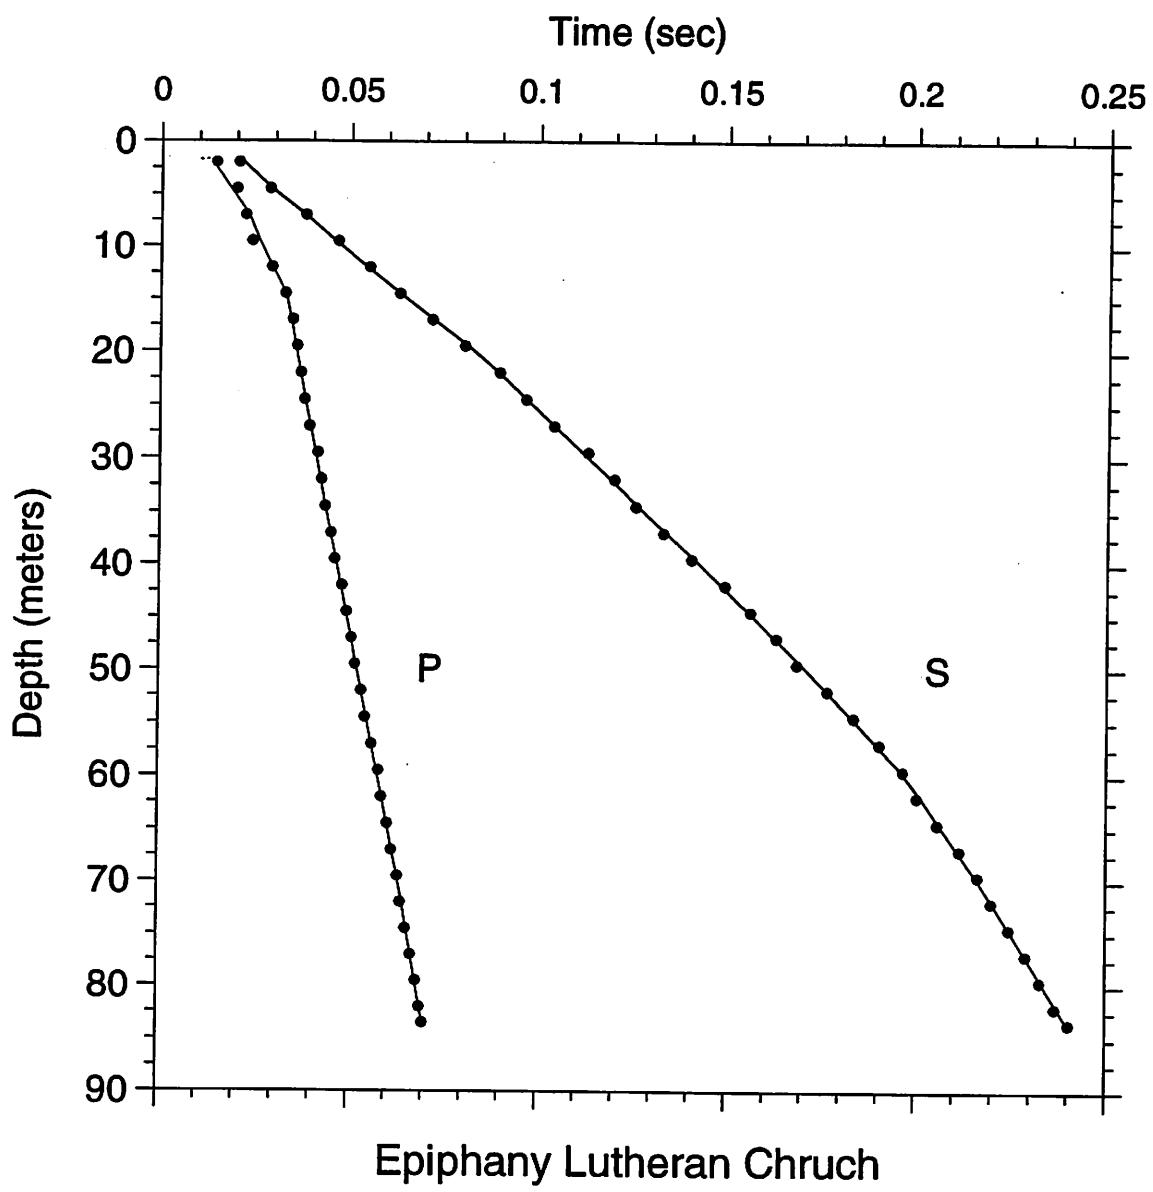


Figure A-4. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Epiphany Lutheran Church (ELC)

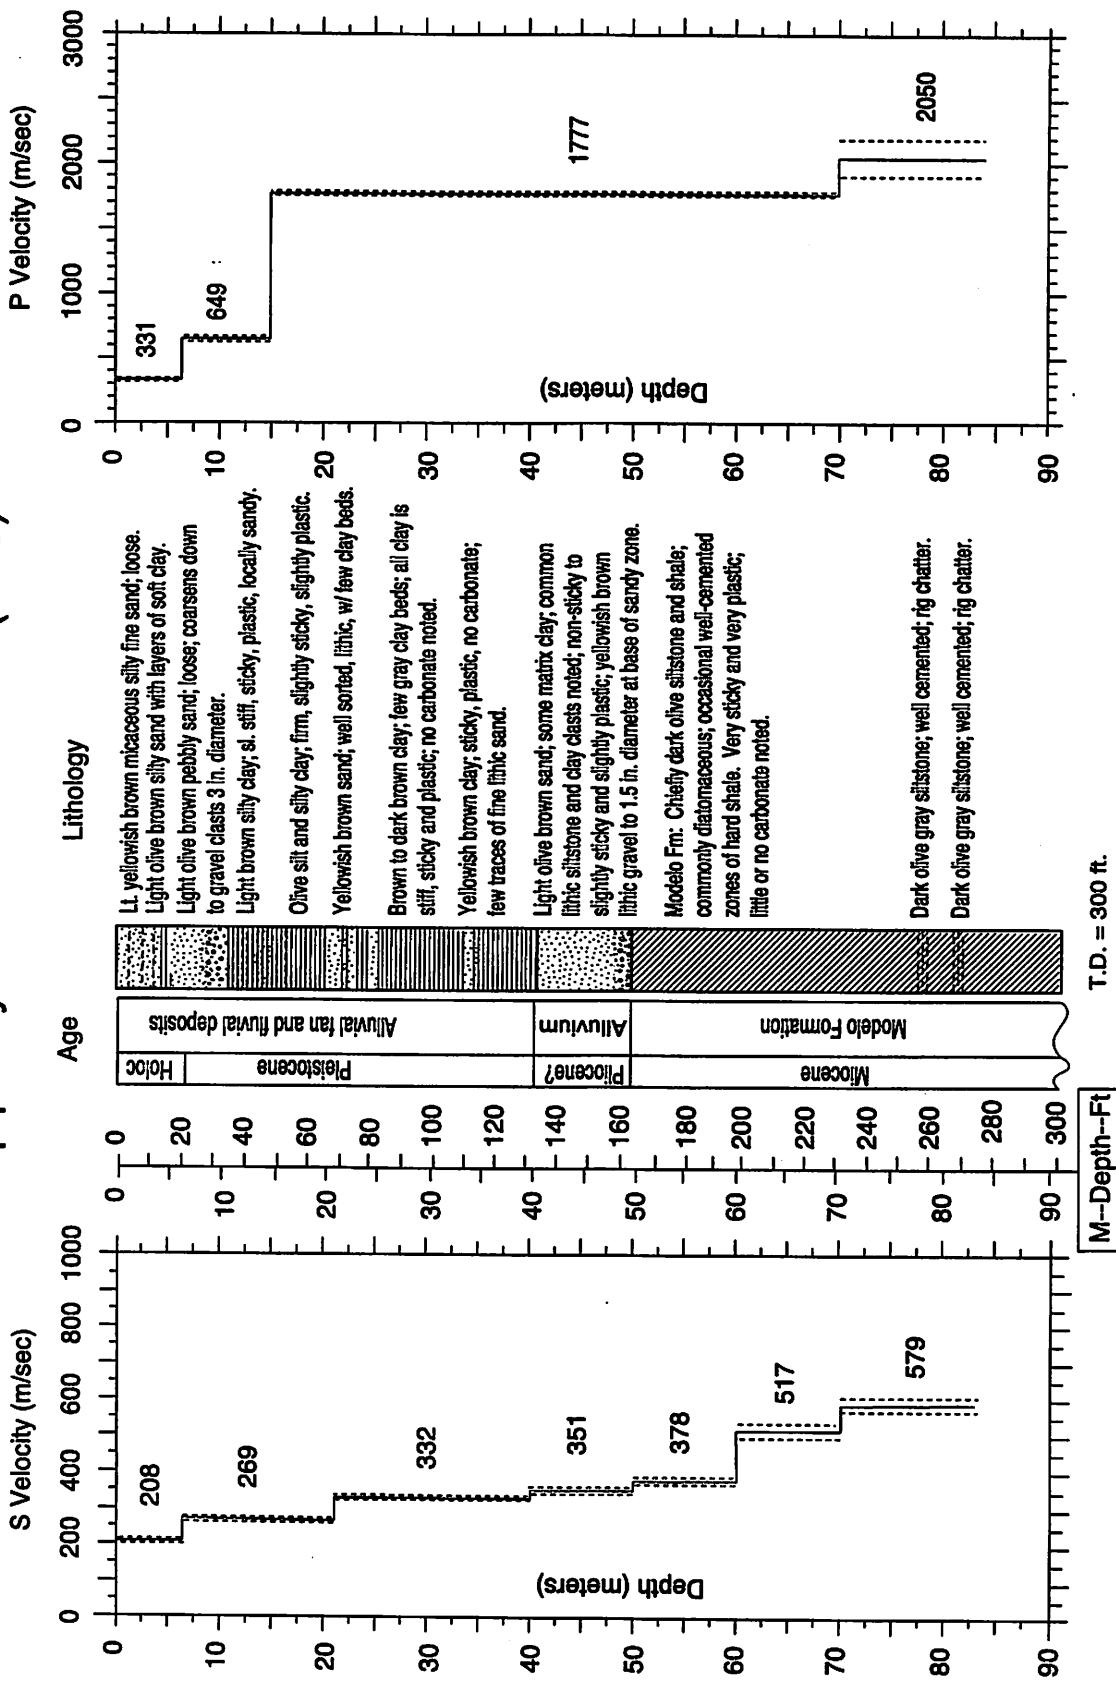


Figure A-5. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-1. S-wave arrival times and velocity summaries.

Location: Epiphany Lutheran Church		Coordinates: 34.21170 118.60510		Hole_Code: 275
offset = 4.00	travel-time file: elcs.tt	nlayers = 7		
d(m)	tsl(s)	tvrt(s)	vavg(m/s)	rsdl(sec)
2.0	0.0204	0.0096	208	-0.0011
6.6	0.0286	0.0216	208	-0.0003
4.5	0.0286	0.0216	213	1 -0.0001
7.0	0.0380	0.0329	213	1 0.0001
9.5	0.0466	0.0422	225	0.0008
12.0	0.0550	0.0515	233	1 0.0007
14.5	0.0630	0.0608	238	1 -0.0001
17.0	0.0716	0.0701	242	1 -0.0004
19.5	0.0802	0.0794	245	1 -0.0009
22.0	0.0896	0.0880	250	1 -0.0002
24.5	0.0966	0.0956	256	1 -0.0002
27.0	0.1040	0.1031	262	1 -0.0002
29.5	0.1130	0.1106	267	1 0.0014
32.0	0.1200	0.1182	271	1 0.0009
34.5	0.1258	0.1257	274	1 -0.0007
37.0	0.1332	0.1332	278	1 -0.0008
39.5	0.1406	0.1408	281	1 -0.0009
42.0	0.1494	0.1480	284	1 -0.0008
44.5	0.1562	0.1552	287	1 0.0005
47.0	0.1632	0.1622	290	1 0.0004
49.5	0.1686	0.1693	292	1 -0.0013
52.0	0.1766	0.1760	295	1 0.0001
54.5	0.1836	0.1827	298	1 0.0005
57.0	0.1904	0.1893	301	1 0.0007
59.5	0.195.2	0.1966	0.1959	304 1 0.0003
62.0	0.203.4	0.2004	0.2011	308 1 -0.0011
64.5	0.211.6	0.2058	0.2059	313 1 -0.0005
67.0	0.219.8	0.2116	0.2108	318 1 0.0005
69.5	0.228.0	0.2164	0.2156	322 1 0.0005
72.0	0.236.2	0.2200	0.2200	327 1 -0.0003
74.5	0.244.4	0.2246	0.2243	332 2 0.0000
77.0	0.252.6	0.2290	0.2286	337 2 0.0001
79.5	0.260.8	0.2318	0.2330	341 2 -0.0004
82.0	0.269.0	0.2368	0.2373	346 2 -0.0007
83.5	0.274.0	0.2404	0.2399	348 1 0.0003

Explanation:

d(m) = depth in meters
 dtb(ft) = depth in feet
 ts1(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-Wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth,
 computed as avg vel = d(m)/tvrt(s)
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

TABLE A-2. P-wave arrival times and velocity summaries.

Location:	Epiphany Lutheran Church	Coordinates:	34.21170	118.60510	Hole_Code:	275
Offset =	4.00	travel-time file:	ELCP.TT	layers =	4	
d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)
2.0	6.6	0.0144	0.0060	331	1	0.0009
4.5	14.8	0.0198	0.0156	331	1	0.0016
7.0	23.0	0.0222	0.0203	346	1	0.0009
9.5	31.2	0.0240	0.0241	394	1	0.0019
12.0	39.4	0.0292	0.0280	429	1	-0.0001
14.5	47.6	0.0328	0.0318	456	1	-0.0001
17.0	55.8	0.0348	0.0337	504	1	-0.0004
19.5	64.0	0.0360	0.0351	555	1	-0.0004
22.0	72.2	0.0370	0.0365	603	1	-0.0001
24.5	80.4	0.0380	0.0379	646	1	-0.0002
27.0	88.6	0.0394	0.0393	687	1	-0.0002
29.5	96.8	0.0416	0.0407	724	1	-0.0006
32.0	105.0	0.0426	0.0421	759	1	-0.0003
34.5	113.2	0.0436	0.0435	792	1	-0.0001
37.0	121.4	0.0452	0.0450	823	1	-0.0001
39.5	129.6	0.0462	0.0464	852	1	-0.0003
42.0	137.8	0.0482	0.0478	879	1	-0.0003
44.5	146.0	0.0494	0.0492	905	1	-0.0001
47.0	154.2	0.0508	0.0506	929	1	-0.0001
49.5	162.4	0.0518	0.0520	952	1	-0.0003
52.0	170.6	0.0536	0.0534	974	1	-0.0001
54.5	178.8	0.0546	0.0548	994	1	-0.0003
57.0	187.0	0.0564	0.0562	1014	1	-0.0001
59.5	195.2	0.0582	0.0576	1033	1	-0.0005
62.0	203.4	0.0590	0.0590	1050	1	-0.0001
64.5	211.6	0.0606	0.0604	1067	1	-0.0001
67.0	219.8	0.0618	0.0618	1084	1	-0.0001
69.5	228.0	0.0634	0.0632	1099	1	-0.0001
72.0	236.2	0.0642	0.0645	1116	1	-0.0004
74.5	244.4	0.0656	0.0657	1134	1	-0.0002
77.0	252.6	0.0670	0.0669	1150	1	-0.0000
79.5	260.8	0.0684	0.0682	1166	1	-0.0002
82.0	269.0	0.0694	0.0694	1182	1	-0.0000
83.5	274.0	0.0702	0.0701	1191	1	-0.0000

Explanation:
d(m) = depth in meters
d(ft) = depth in feet
tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
tvrt(s) = vertical travel time computed from the model.
vavg(m/s) = average velocity from the surface to each depth, computed as avg_vel = d(m)/tvrt(s)
sig = sigma, standard deviation normalized to the standard deviation of best picks
rsdl(sec) = residual (observed - fitted travel time), in secs
dtb(m) = depth to bottom in meters
thk(m) = thickness of layer in meters
v(m/s) = velocity in meters per second
vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
vtb(m) = depth to bottom of layer in meters
thk(ft) = thickness of layer in feet
vt(f/s) = velocity in feet per second
vl(f/s) = lower limit of velocity in feet per second
vu(f/s) = upper limit of velocity in feet per second

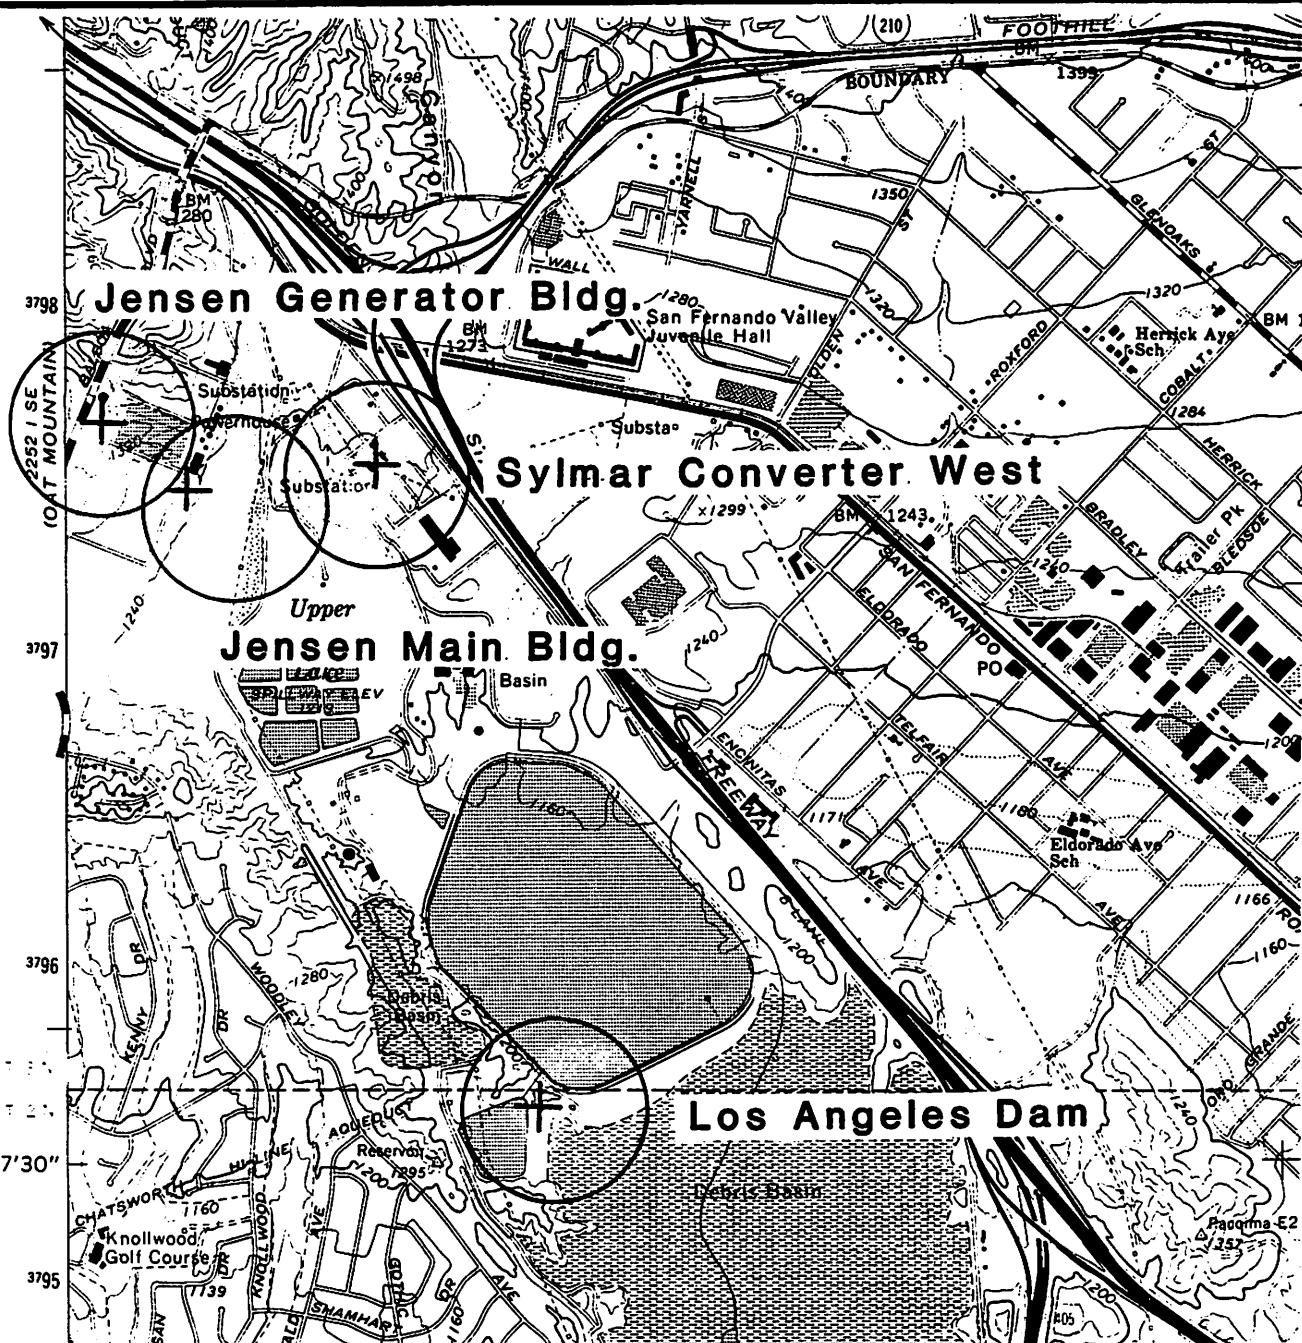


Figure A-6. Site location map for the borehole at Jensen Generator Building. The accelerograph is located approximately 25 meters from the borehole.

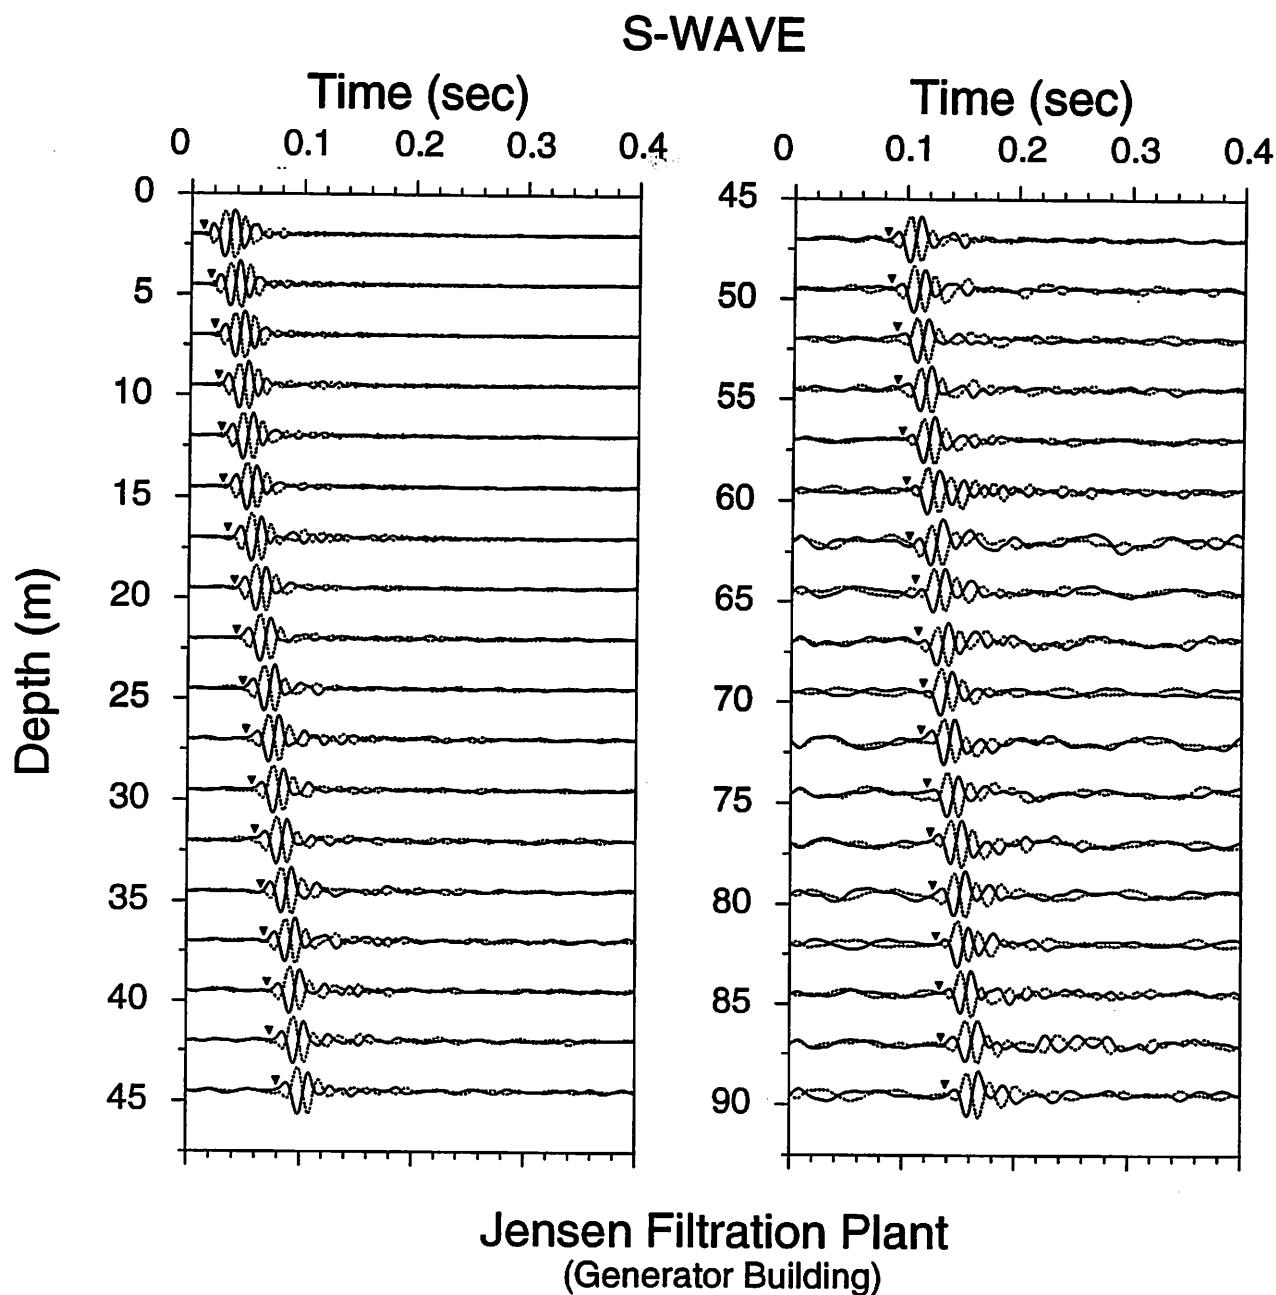


Figure A-7. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

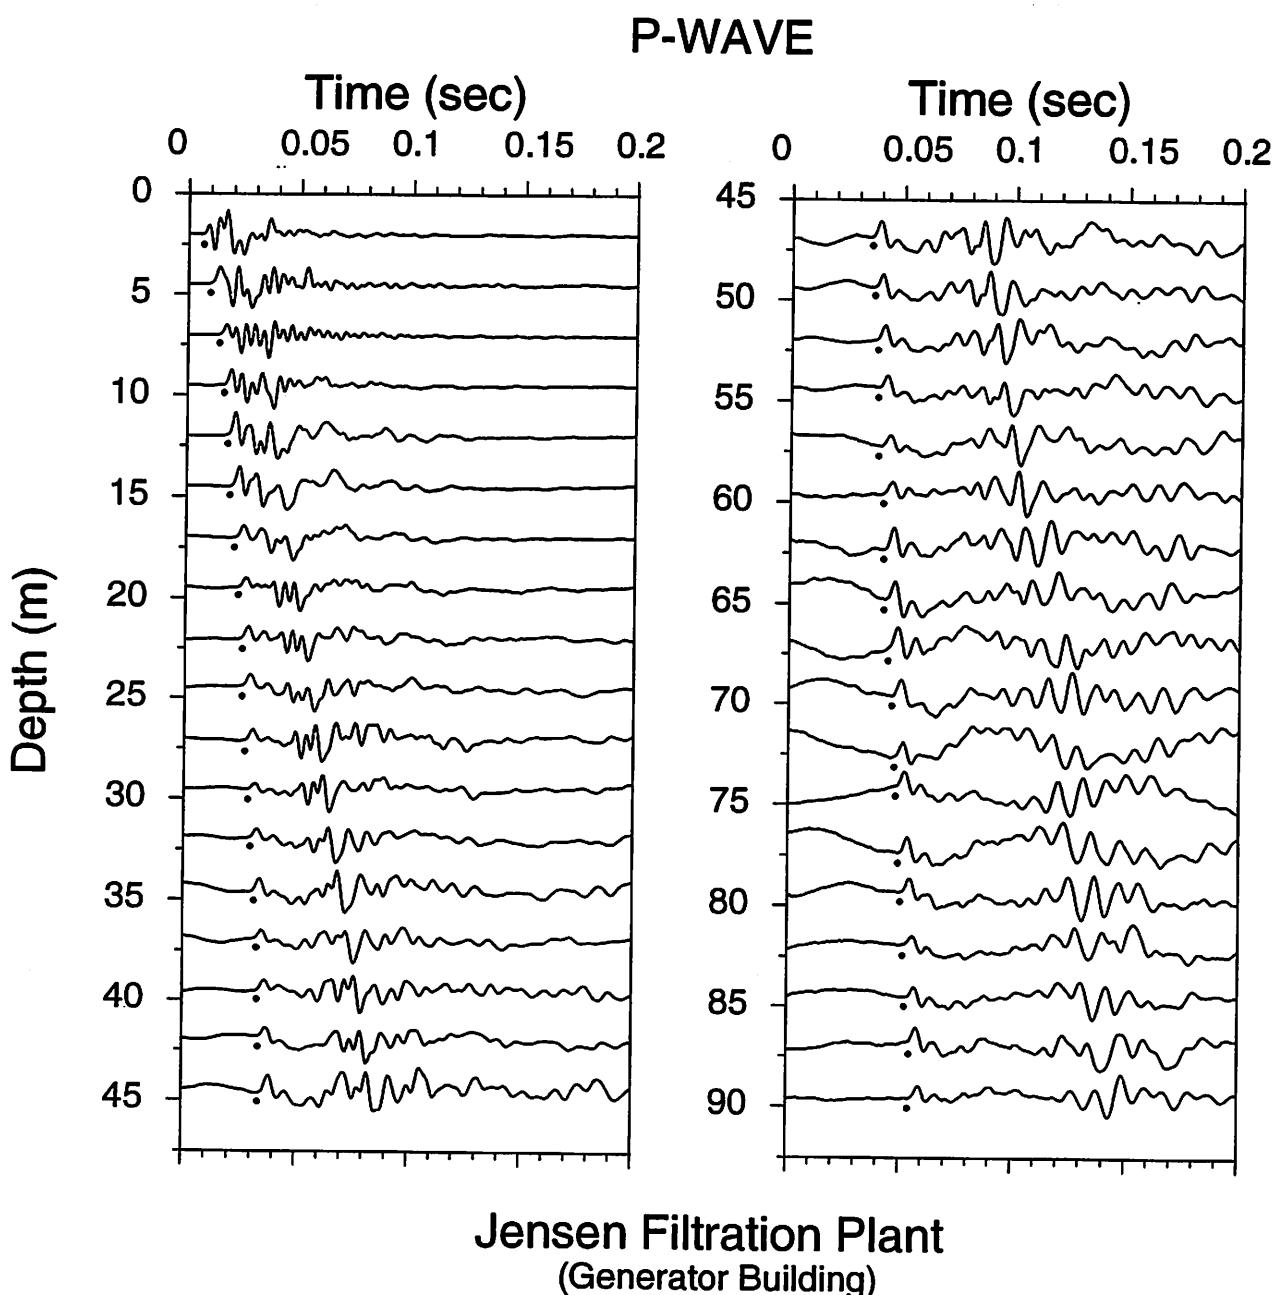


Figure A-8. Vertical component record section. Approximate P-wave arrivals are indicated by the solid circles.

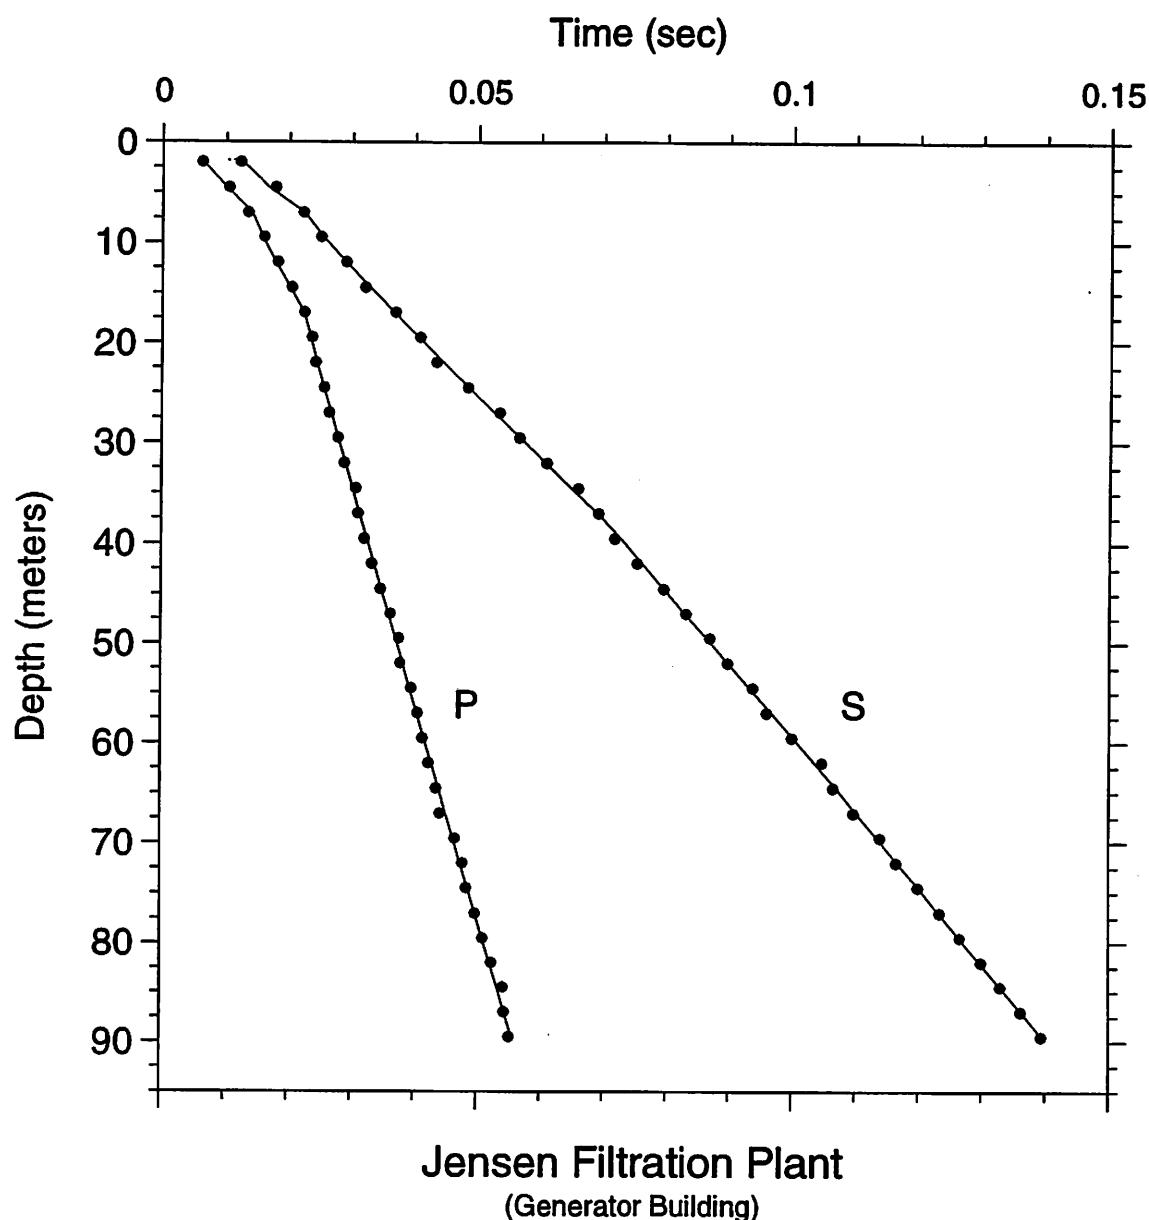


Figure A-9. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Jensen Generator Building

Joseph Jensen Filtration Plant

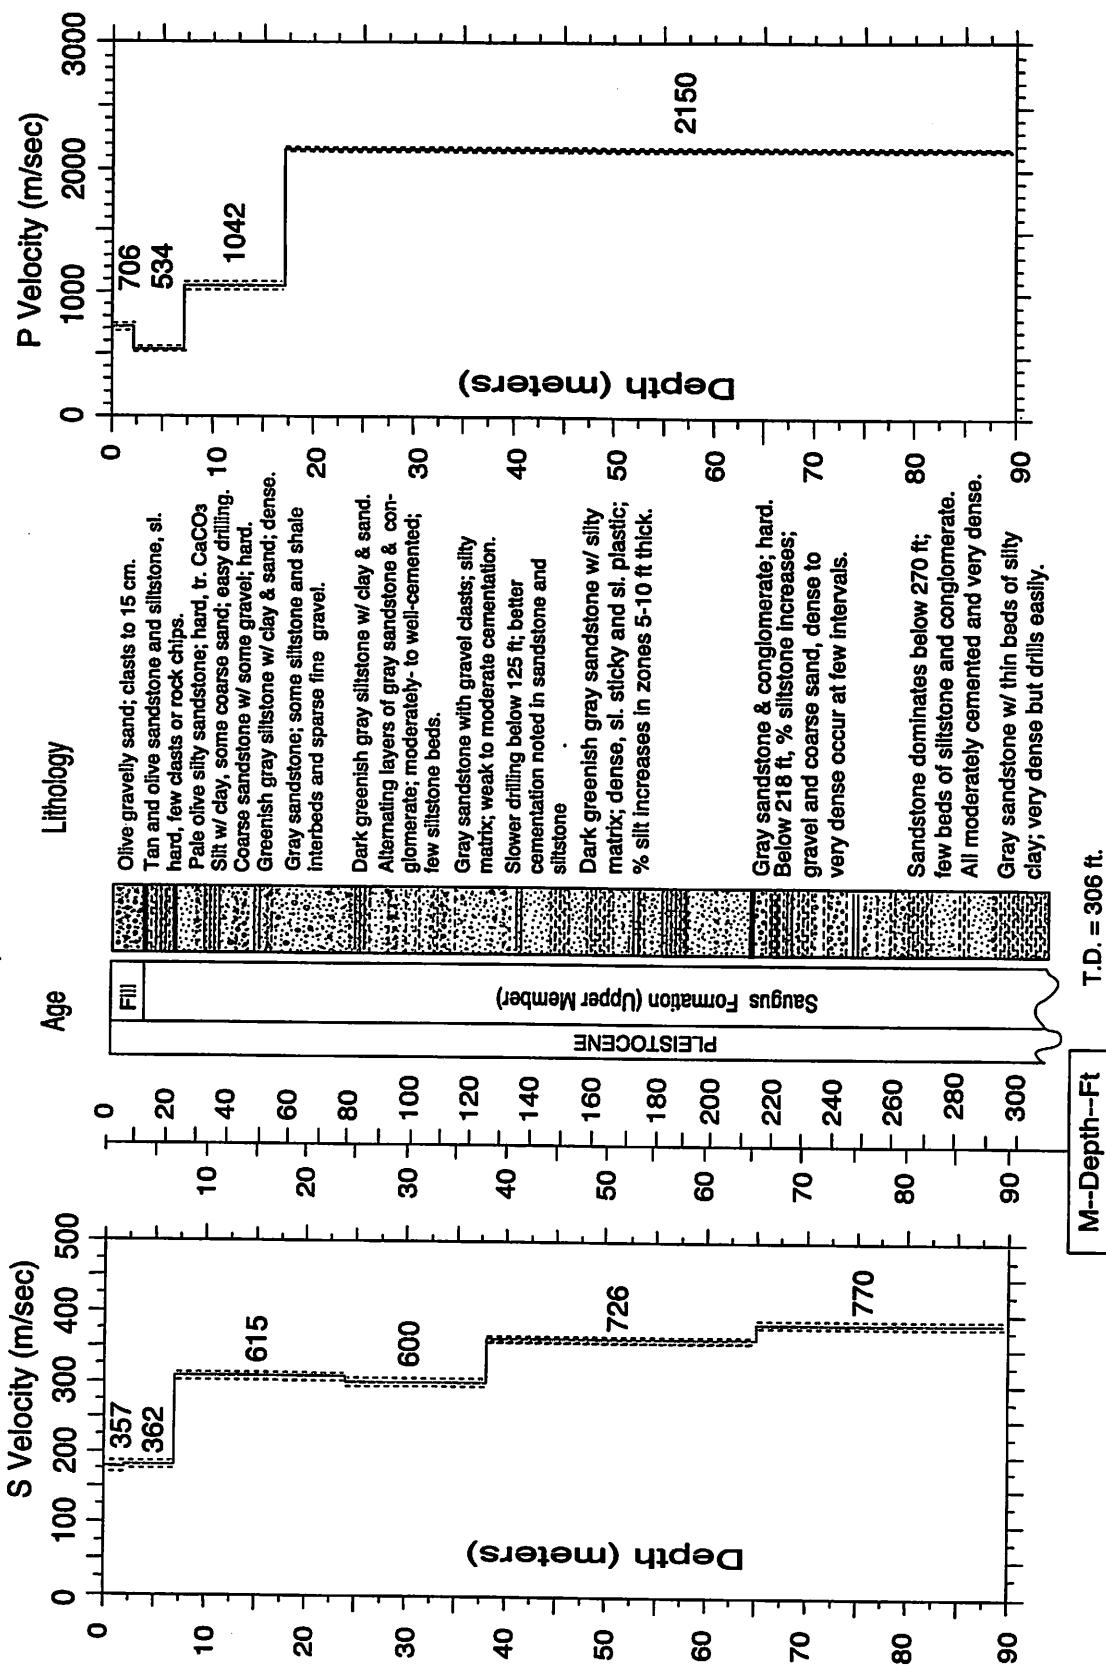


Figure A-10. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-3. S-wave arrival times and velocity summaries.

Location:	Jensen Generator Building	Coordinates:	34.31300	118.49830	Hole_Code:	278							
offset =	4.00	travel-time file:	jbs.tt										
d(m)	ts(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	nlayers = 6							
2.0	0.0122	0.0056	357	-0.0003	dtb(m) thk(m) v(m/s) vu(m/s)	dtb(ft) thk(ft) v(ft/s) vu(ft/s)							
4.5	14.8	0.0178	0.0125	360	2.0	357	6.6	1173	1123	1227			
7.0	23.0	0.0222	0.0194	361	7.0	351	23.0	16.4	1188	1153	1226		
9.5	31.2	0.0250	0.0235	405	17.0	615	627	78.7	55.8	1983	2056		
12.0	39.4	0.0290	0.0275	436	14.0	600	589	612	124.7	45.9	1970	1934	
14.5	47.6	0.0320	0.0316	459	27.0	726	718	734	213.3	88.6	2380	2354	
17.0	55.8	0.0368	0.0357	477	0.0007	89.5	770	759	781	293.6	80.4	2527	2491
19.5	64.0	0.0408	0.0397	491	0.0002								2564
22.0	72.2	0.0434	0.0438	503	1								
24.5	80.4	0.0484	0.0479	512	-0.0011								
27.0	88.6	0.0534	0.0520	519	1								
29.5	96.8	0.0566	0.0562	525	1								
32.0	105.0	0.0610	0.0604	530	1								
34.5	113.2	0.0660	0.0645	535	1								
37.0	121.4	0.0692	0.0687	539	1								
39.5	129.6	0.0718	0.0724	545	1								
42.0	137.8	0.0754	0.0759	554	1								
44.5	146.0	0.0796	0.0793	561	1								
47.0	154.2	0.0832	0.0828	568	1								
49.5	162.4	0.0870	0.0862	574	1								
52.0	170.6	0.0898	0.0896	580	1								
54.5	178.8	0.0938	0.0931	585	1								
57.0	187.0	0.0960	0.0965	590	1								
59.5	195.2	0.1000	0.1000	595	1								
62.0	203.4	0.1048	0.1034	599	1								
64.5	211.6	0.1066	0.1069	604	1								
67.0	219.8	0.1098	0.1102	608	1								
69.5	228.0	0.1140	0.1134	613	1								
72.0	236.2	0.1166	0.1166	617	1								
74.5	244.4	0.1200	0.1199	621	1								
77.0	252.6	0.1234	0.1231	625	1								
79.5	260.8	0.1266	0.1264	629	1								
82.0	269.0	0.1300	0.1296	633	1								
84.5	277.2	0.1330	0.1329	636	1								
87.0	285.4	0.1362	0.1361	639	1								
89.5	293.6	0.1394	0.1394	642	1								

Explanation:
d(m) = depth in meters
d(ft) = depth in feet
tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-Wave mode, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
tvrt(s) = vertical travel time computed from the model
vavg(m/s) = average velocity from the surface to each depth,
computed as avg_vel = d(m)/tvrt(s)
sig = sigma, standard deviation normalized to the standard deviation of best picks
rsdl(sec) = residual (observed - fitted travel time), in secs
ctb(m) = depth to bottom of layer in meters
thk(m) = thickness of layer in meters
v(m/s) = velocity of layer in meters per second
vl(m/s) = lower limit of velocity in meters per second
(vu(m/s)) = upper limit of velocity in meters per second
dtb(ft) = depth to bottom of layer in feet
thk(ft) = thickness of layer in feet
(vf(ft/s)) = velocity of layer in feet per second
vl(ft/s) = lower limit of velocity in feet per second
vu(ft/s) = upper limit of velocity in feet per second

TABLE A-4. P-Wave arrival times and velocity summaries.

Location:	Jensen Generator Building	Coordinates:	34.31300	118.49830	Hole_Code:	278					
Offset =	4.00	travel-time file:	jgbp.tt		nlayers =	4					
d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(ft)	thk(ft)	v(m/s)	vl(ft/s)	vu(ft/s)	
2.0	6.6	0.0062	0.0028	706	-0.0001	2.0	2.0	706	666	235	2186
4.5	14.8	0.0104	0.0075	598	1	0.0004	7.0	5.0	534	23	16.4
7.0	23.0	0.0134	0.0122	574	1	-0.0006	17.0	10.0	1042	1010	1690
9.5	31.2	0.0160	0.0146	651	1	0.0003	89.5	72.5	2135	2164	32.8
12.0	39.4	0.0182	0.0170	706	1	0.0004	2135	2150	293.6	237.9	34.8
14.5	47.6	0.0204	0.0194	747	1	0.0003				7052	3312
17.0	55.8	0.0224	0.0218	780	1	0.0001					7004
19.5	64.0	0.0236	0.0230	849	1	0.0002					
22.0	72.2	0.0242	0.0241	912	1	-0.0002					
24.5	80.4	0.0256	0.0253	969	1	0.0001					
27.0	88.6	0.0264	0.0265	1021	1	-0.0003					
29.5	96.8	0.0278	0.0276	1068	1	0.0000					
32.0	105.0	0.0288	0.0288	1112	1	-0.0002					
34.5	113.2	0.0306	0.0299	1152	1	0.0005					
37.0	121.4	0.0310	0.0311	1189	1	-0.0002					
39.5	129.6	0.0320	0.0323	1224	1	-0.0004					
42.0	137.8	0.0332	0.0334	1256	1	-0.0004					
44.5	146.0	0.0346	0.0346	1286	1	-0.0001					
47.0	154.2	0.0362	0.0358	1314	1	0.0003					
49.5	162.4	0.0376	0.0369	1341	1	0.0006					
52.0	170.6	0.0378	0.0381	1365	1	-0.0004					
54.5	178.8	0.0396	0.0392	1389	1	0.0003					
57.0	187.0	0.0406	0.0404	1410	1	0.0001					
59.5	195.2	0.0414	0.0416	1431	1	-0.0002					
62.0	203.4	0.0424	0.0427	1451	1	-0.0004					
64.5	211.6	0.0436	0.0439	1469	1	-0.0004					
67.0	219.8	0.0442	0.0451	1487	1	-0.0009					
69.5	228.0	0.0466	0.0462	1503	1	0.0003					
72.0	236.2	0.0478	0.0474	1519	1	0.0004					
74.5	244.4	0.0484	0.0486	1534	1	-0.0002					
77.0	252.6	0.0498	0.0497	1549	1	0.0000					
79.5	260.8	0.0510	0.0509	1563	1	0.0001					
82.0	269.0	0.0524	0.0520	1576	1	0.0003					
84.5	277.2	0.0542	0.0532	1588	1	0.0000					
87.0	285.4	0.0544	0.0544	1600	1	-0.0004					
89.5	293.6	0.0552	0.0555	1612	1	-0.0004					

Explanation:
 d(m) = depth in meters
 d(ft) = depth in feet
 ts1(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-Wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as avg_vel = (d(m)/tvrt(s))
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SAN FERNANDO QUADRANGLE
CALIFORNIA—LOS ANGELES CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)



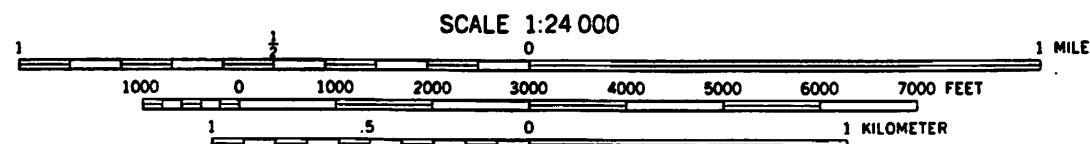


Figure A-11. Site location map for the borehole at Jensen Main Building. The accelerograph is located approximately 40 meters from the borehole.

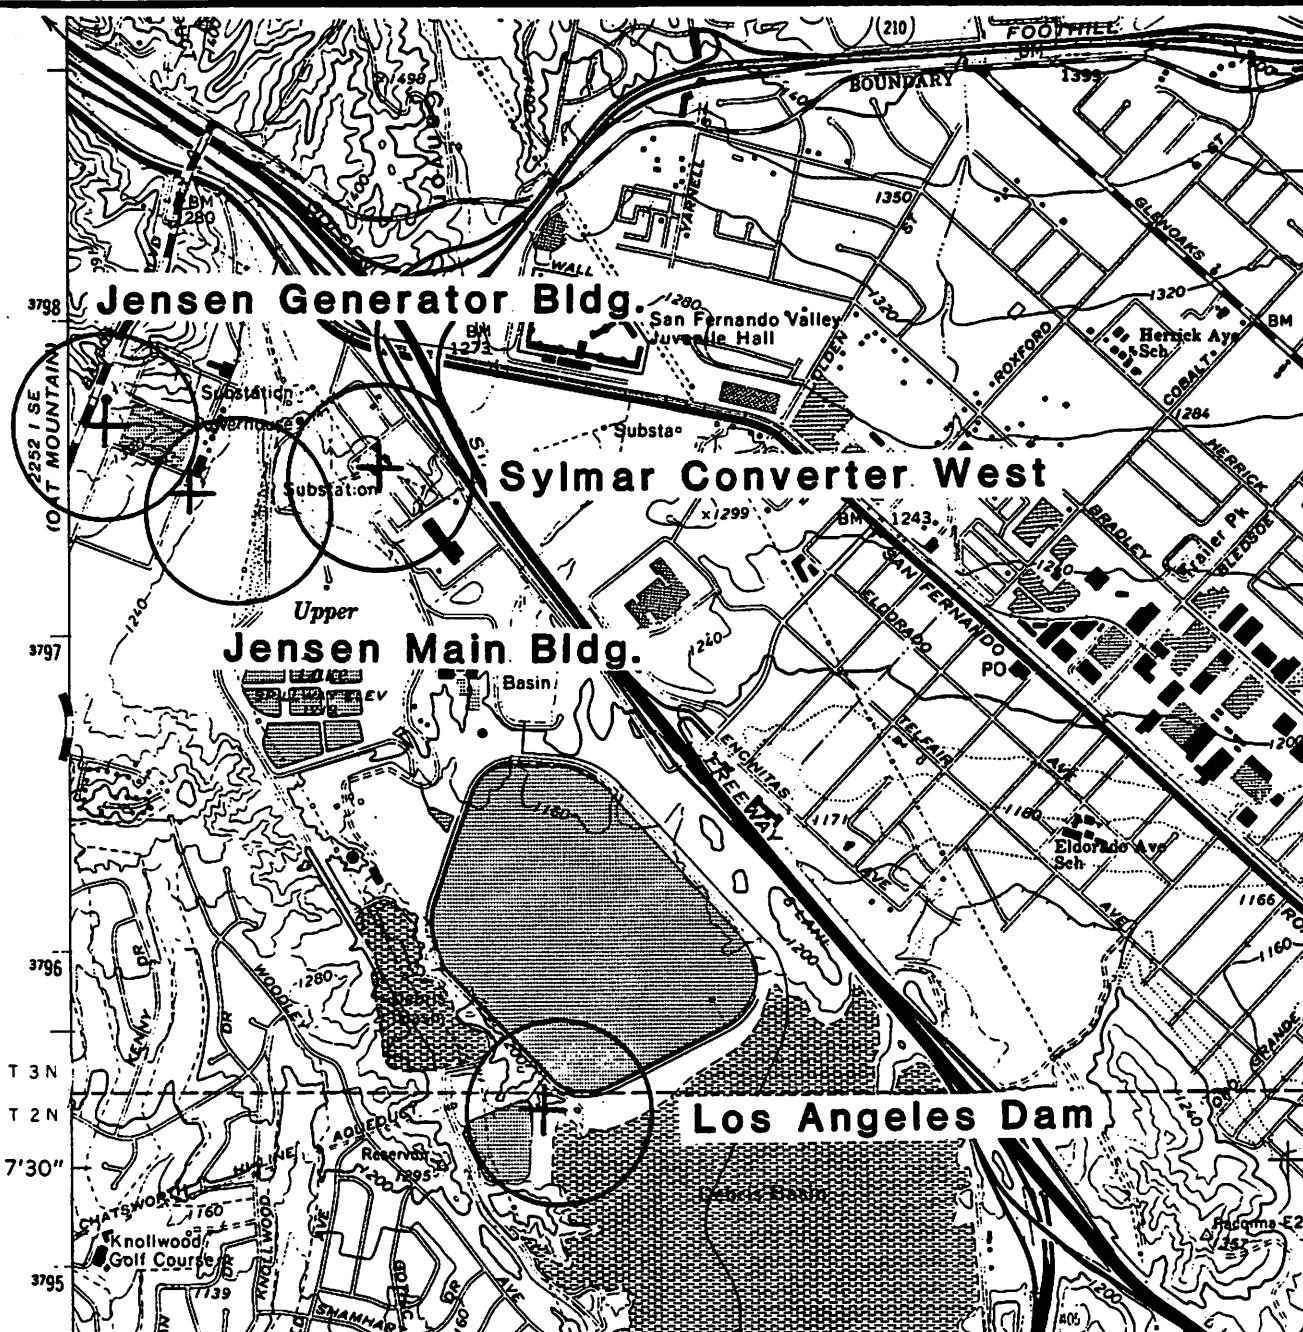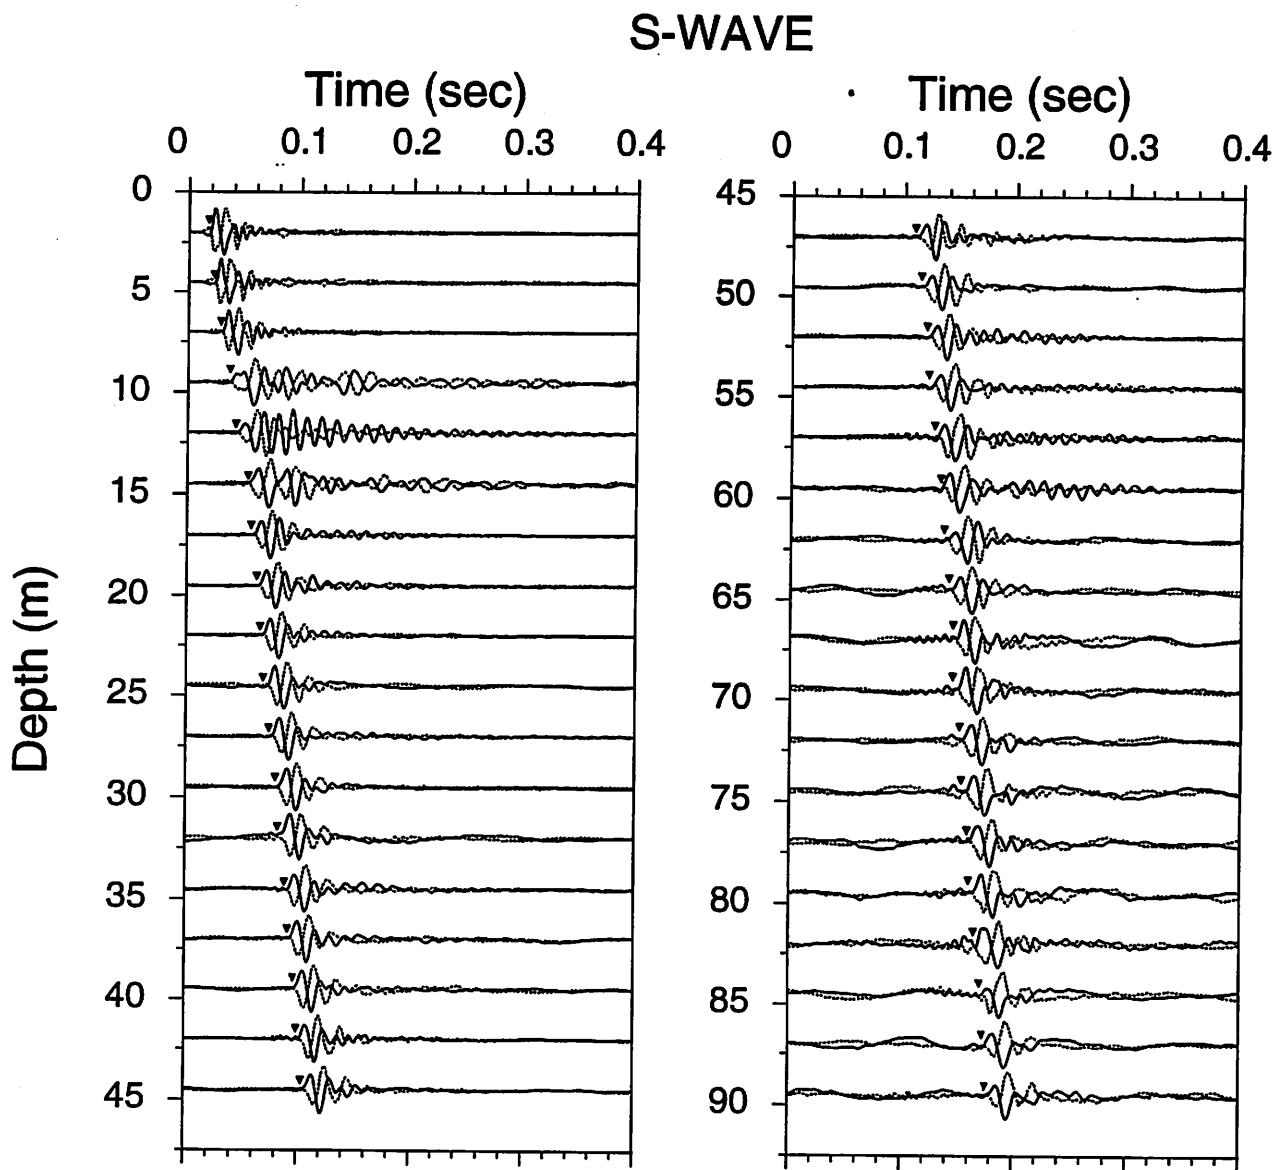

Jensen Filtration Plant
(Main Building)

Figure A-12. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

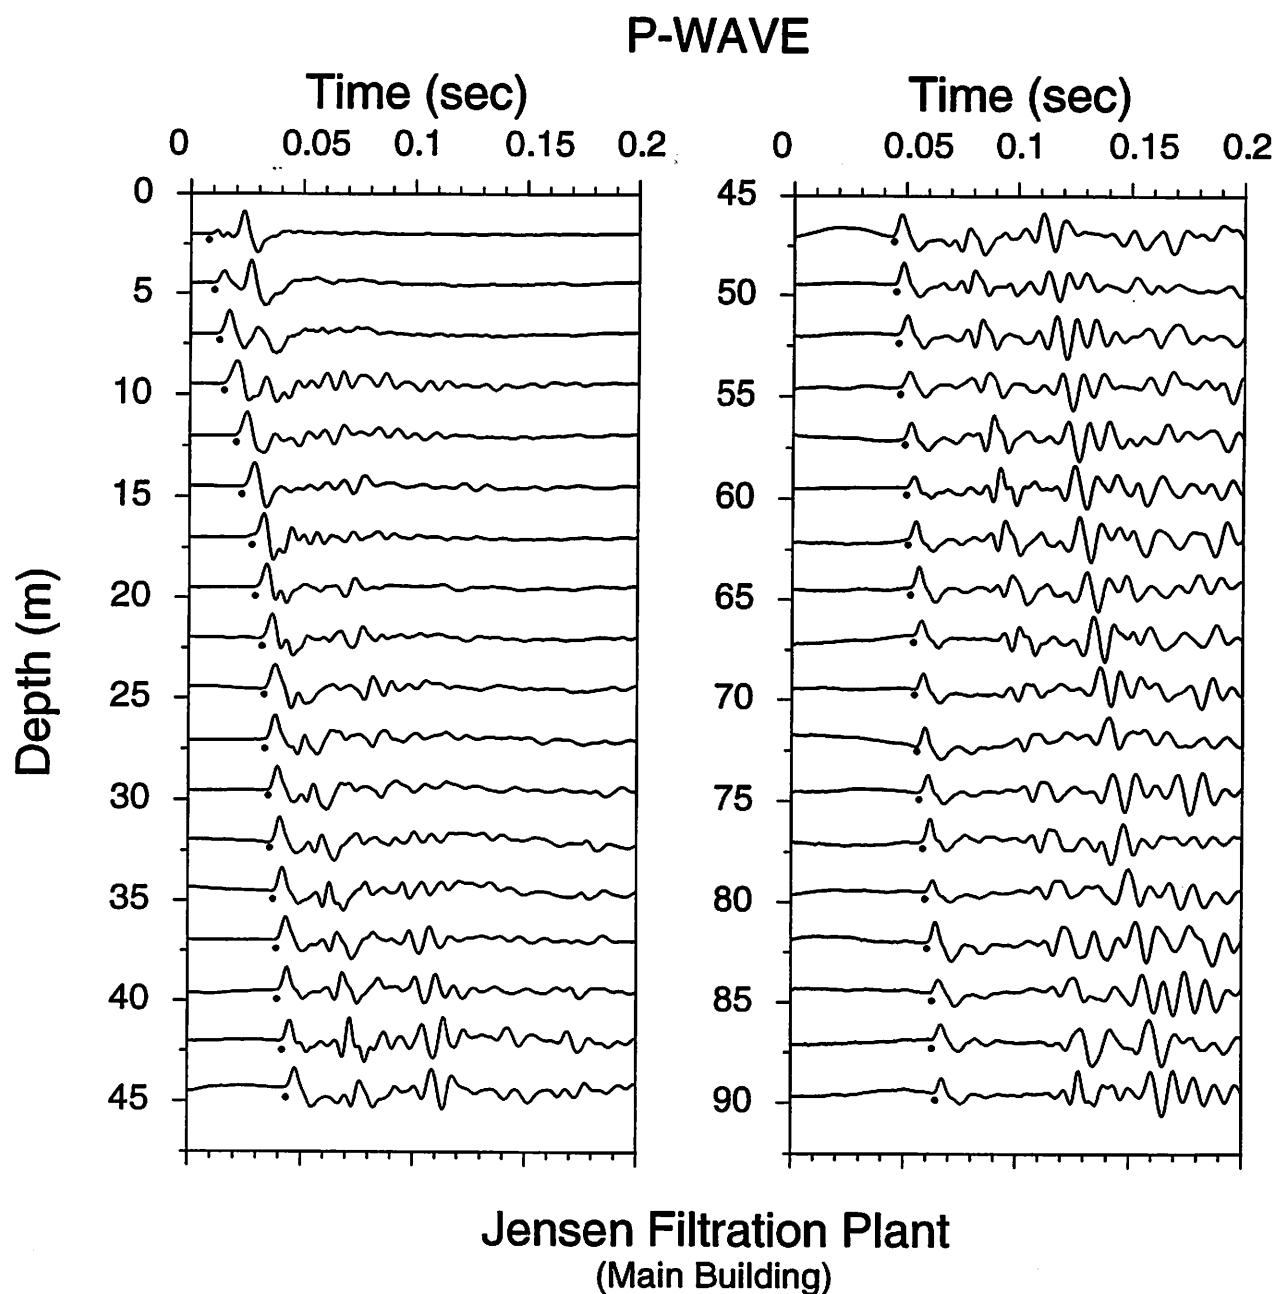


Figure A-13. Vertical component record section. Approximate P-wave arrivals are indicated by the solid circles.

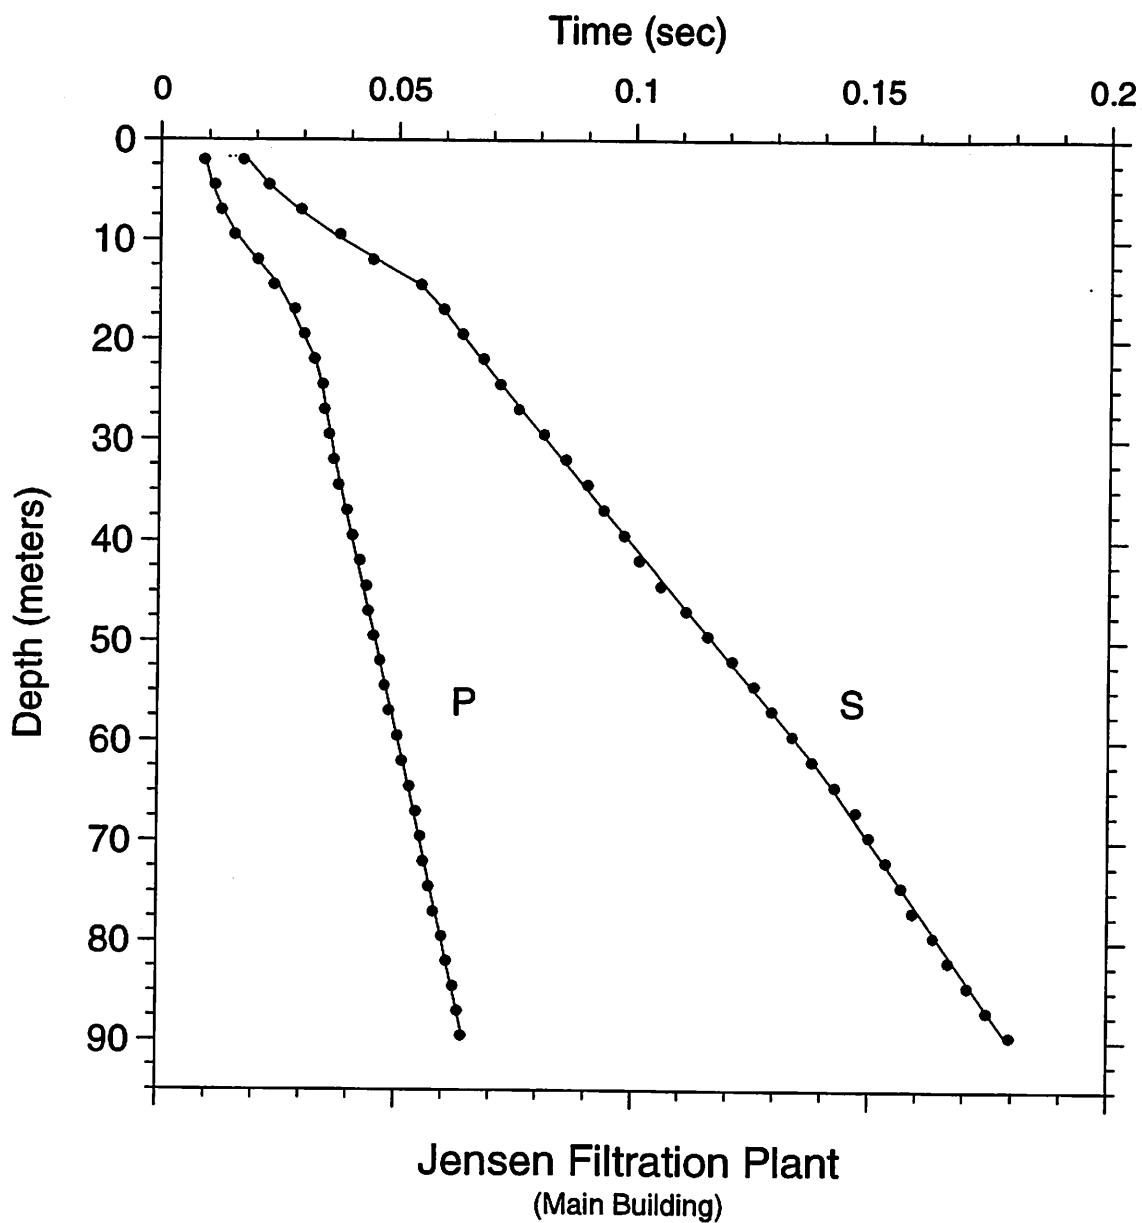


Figure A-14. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Jensen Main Building (JMB)

Joseph Jensen Filtration Plant

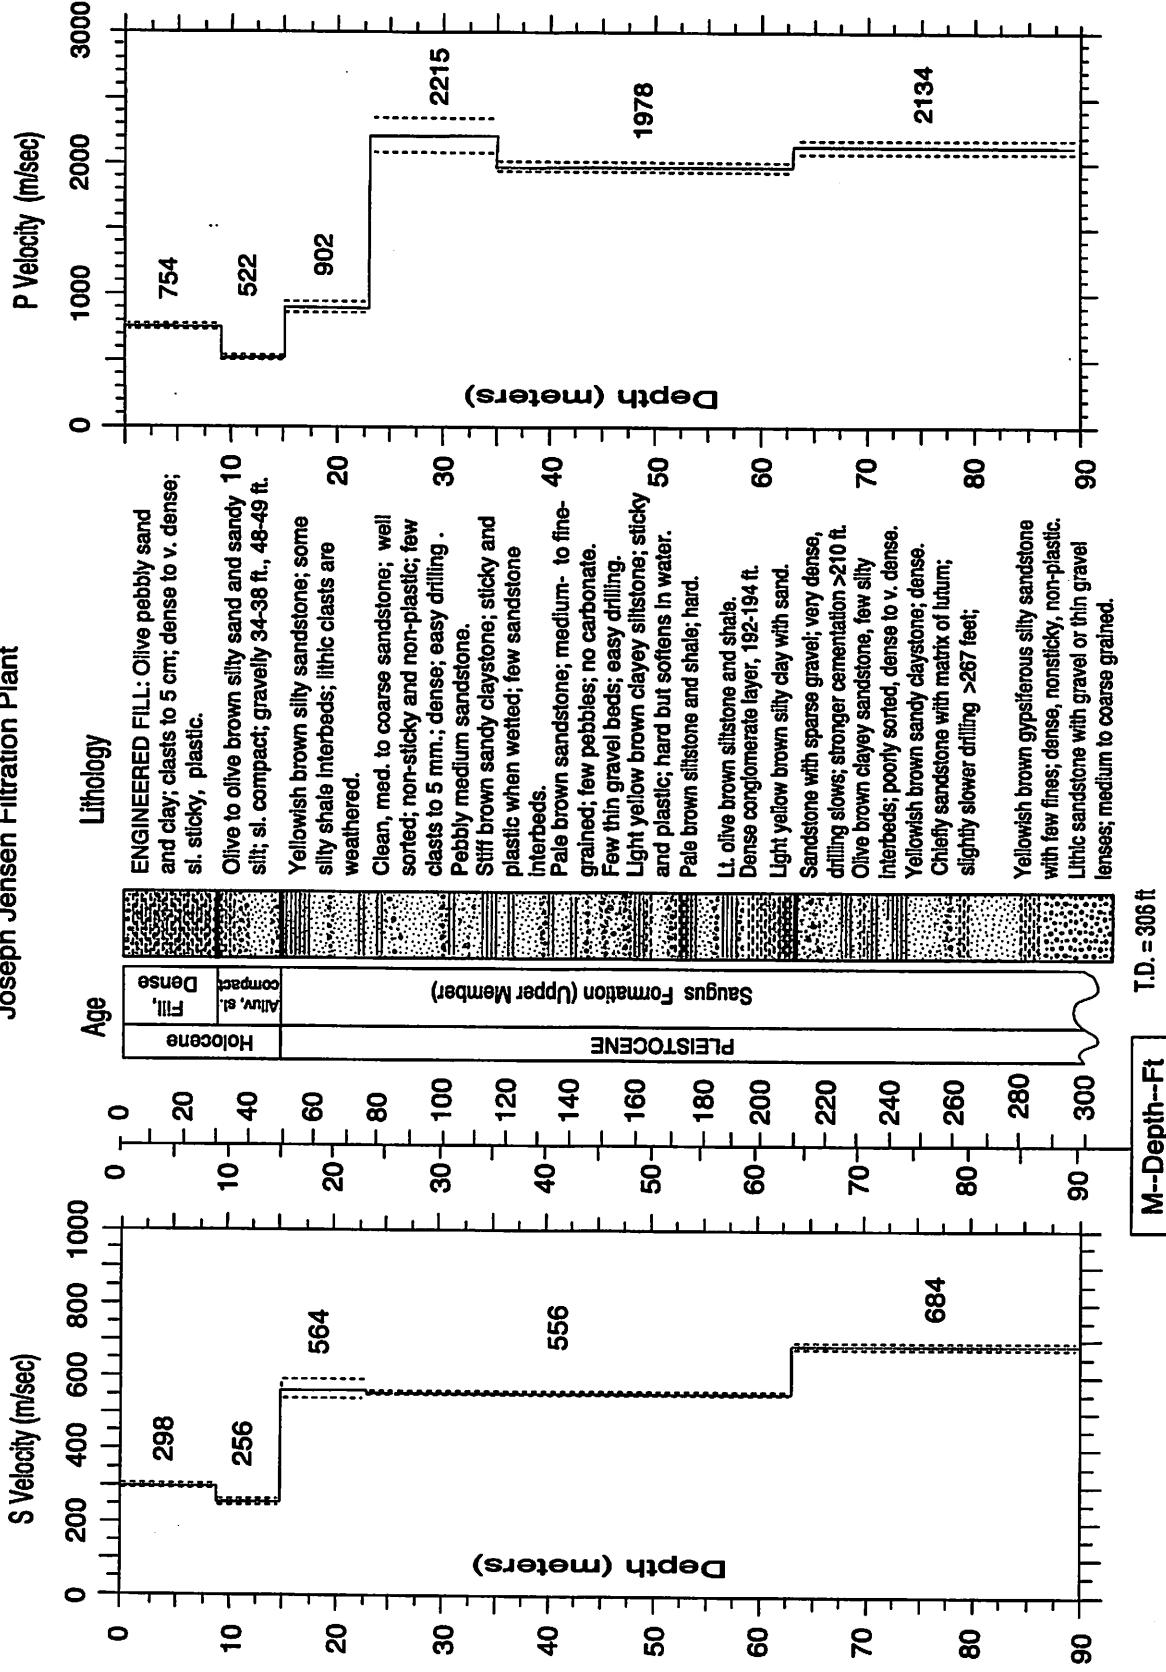


Figure A-15. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-5. S-wave arrival times and velocity summaries.

Location:	Jensen Main Building	Coordinates:	34.31110	118.49570	Hole_Code:	277
offset =	5.00	travel-time file:	JMBS.TT		layers =	5
d(ft)	ts(s)	tvrt(s)	vavg(m/s)	sig	rsdl(ssc)	
2.0	6.6	0.0172	0.0067	298	1	-0.0009
4.5	14.8	0.0226	0.0151	298	1	0.0000
7.0	23.0	0.0294	0.0235	298	1	0.0006
9.5	31.2	0.0376	0.0321	296	2	0.0013
12.0	39.4	0.0446	0.0419	286	1	-0.0008
14.5	47.6	0.0548	0.0517	281	1	0.0002
17.0	55.8	0.0596	0.0572	297	1	0.0001
19.5	64.0	0.0636	0.0616	317	1	0.0002
22.0	72.2	0.0680	0.0660	333	1	0.0005
24.5	80.4	0.0716	0.0705	347	1	-0.0002
27.0	88.6	0.0756	0.0750	360	1	-0.0005
29.5	96.8	0.0810	0.0795	371	1	0.0005
32.0	105.0	0.0856	0.0840	381	1	0.0007
34.5	113.2	0.0902	0.0885	390	1	0.0009
37.0	121.4	0.0936	0.0920	398	1	-0.0001
39.5	129.6	0.0980	0.0975	405	1	-0.0002
42.0	137.8	0.1012	0.1020	412	1	-0.0014
44.5	146.0	0.1058	0.1065	418	1	-0.0013
47.0	154.2	0.1112	0.1109	424	1	-0.0003
49.5	162.4	0.1158	0.1154	429	1	-0.0002
52.0	170.6	0.1210	0.1199	434	1	0.0006
54.5	178.8	0.1256	0.1244	438	2	0.0007
57.0	187.0	0.1294	0.1289	442	2	0.0000
59.5	195.2	0.1338	0.1334	446	2	0.0000
62.0	203.4	0.1380	0.1379	450	1	-0.0003
64.5	211.6	0.1428	0.1419	455	1	0.0005
67.0	219.8	0.1472	0.1455	460	1	0.0013
69.5	228.0	0.1500	0.1492	466	2	0.0005
72.0	236.2	0.1536	0.1528	471	1	0.0004
74.5	244.4	0.1568	0.1565	476	1	0.0000
77.0	252.6	0.1592	0.1602	481	1	-0.0013
79.5	260.8	0.1636	0.1638	485	1	-0.0005
82.0	269.0	0.1668	0.1675	490	3	-0.0009
84.5	277.2	0.1708	0.1711	494	3	-0.0006
87.0	285.4	0.1748	0.1748	498	1	-0.0002
89.5	293.6	0.1796	0.1784	502	1	0.0009

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model.
- vavg(m/s) = average velocity from the surface to each depth, computed as $\text{avg vel} = \text{d(m)}/\text{tvrt(s)}$
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- dtb(m) = depth to bottom in meters
- thk(m) = thickness of layer in meters
- vt(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- vl(m/s) = upper limit of velocity in meters per second
- vtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- vt(ft/s) = velocity in feet per second
- vl(ft/s) = lower limit of velocity in feet per second
- vu(ft/s) = upper limit of velocity in feet per second

TABLE A-6. P-wave arrival times and velocity summaries.

Location: Jensen Main Building offset = 6.60	Building Coordinates: 34.31110 118.49570	Hole_Code: 277	nlayers = 6
d(ft)	ts(s)	tvrt(s)	dtb(m) thk(m) v(m/s) vrl(m/s) vur(m/s) vlt(m/s) vu(m/s)
6.6	0.0090	0.0027	9.0 9.0 754 742 766 29.5 24.3 2433 2514
2.0	0.0112	0.0060	15.0 6.0 522 505 540 49.2 19.7 1712 1656 1771
4.5	0.0126	0.0093	754 1 -0.0006 8.0 902 861 948 75.5 26.2 2961 2826 3109
7.0	23.0	0.0126	23.0 0.0002 12.0 2215 2088 2357 114.8 39.4 7266 6852 7734
9.5	31.2	0.0154	1 -0.0003 63.0 28.0 1940 2016 206.7 91.9 6488 6366 6614
12.0	39.4	0.0204	678 1 -0.0003 63.0 28.0 1940 2016 206.7 91.9 6488 6366 6614
14.5	47.6	0.0238	645 -0.0008 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
17.0	55.8	0.0282	0.0257 663 1 -0.0008 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
19.5	64.0	0.0302	0.0284 686 1 -0.0003 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
22.0	72.2	0.0324	0.0312 705 1 -0.0001 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
24.5	80.4	0.0342	0.0330 743 1 -0.0003 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
27.0	88.6	0.0346	0.0336 791 1 -0.0003 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
29.5	96.8	0.0356	0.0352 837 1 -0.0003 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
32.0	105.0	0.0366	0.0364 880 1 -0.0003 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
34.5	113.2	0.0376	0.0375 920 1 -0.0004 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
37.0	121.4	0.0394	0.0387 955 1 -0.0002 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
39.5	129.6	0.0406	0.0400 987 1 -0.0002 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
42.0	137.8	0.0422	0.0413 1018 1 -0.0006 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
44.5	146.0	0.0436	0.0425 1046 1 -0.0007 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
47.0	154.2	0.0440	0.0438 1073 1 -0.0001 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
49.5	162.4	0.0452	0.0451 1099 1 -0.0002 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
52.0	170.6	0.0466	0.0463 1123 1 -0.0000 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
54.5	178.8	0.0476	0.0476 1145 1 -0.0002 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
57.0	187.0	0.0486	0.0489 1167 1 -0.0005 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
59.5	195.2	0.0504	0.0501 1187 1 -0.0001 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
62.0	203.4	0.0514	0.0514 1207 1 -0.0002 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
64.5	211.6	0.0530	0.0526 1227 1 -0.0002 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
67.0	219.8	0.0544	0.0538 1246 1 -0.0004 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
69.5	228.0	0.0554	0.0549 1265 1 -0.0003 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
72.0	236.2	0.0560	0.0561 1283 1 -0.0003 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
74.5	244.4	0.0572	0.0573 1301 1 -0.0002 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
77.0	252.6	0.0582	0.0584 1317 1 -0.0004 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
79.5	260.8	0.0600	0.0596 1334 1 -0.0012 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
82.0	269.0	0.0610	0.0608 1349 1 -0.0001 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
84.5	277.2	0.0624	0.0620 1364 1 -0.0003 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
87.0	285.4	0.0634	0.0631 1378 1 -0.0011 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173
89.5	293.6	0.0642	0.0643 1392 1 -0.0002 89.5 26.5 2134 2083 2186 293.6 86.9 7000 6835 7173

Explanation:

- (dm) = depth in meters
- (dft) = depth in feet
- (tsl) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model
- vavg(m/s) = average velocity from the surface to each depth, computed as $\text{avg_vel} = (\text{dm})/\text{tvrt(s)}$
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- ctbm = depth to bottom in meters
- thk(m) = thickness of layer in meters
- V(m/s) = velocity in meters per second
- Vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- Vu(m/s) = upper limit of velocity in meters per second
- dtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- V(ft/s) = velocity in feet per second
- Vl(ft/s) = lower limit of velocity in feet per second
- Vu(ft/s) = upper limit of velocity in feet per second



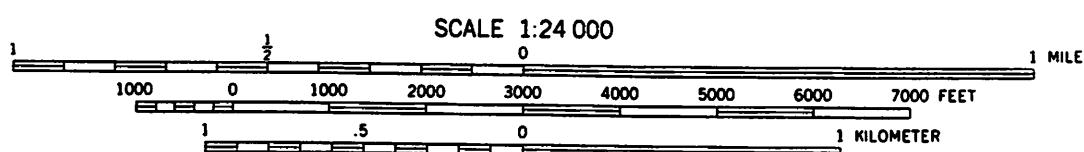


Figure A-16. Site location map for the borehole at Knolls Elementary School. The accelerograph is located approximately 25 meters from the borehole.


S-WAVE

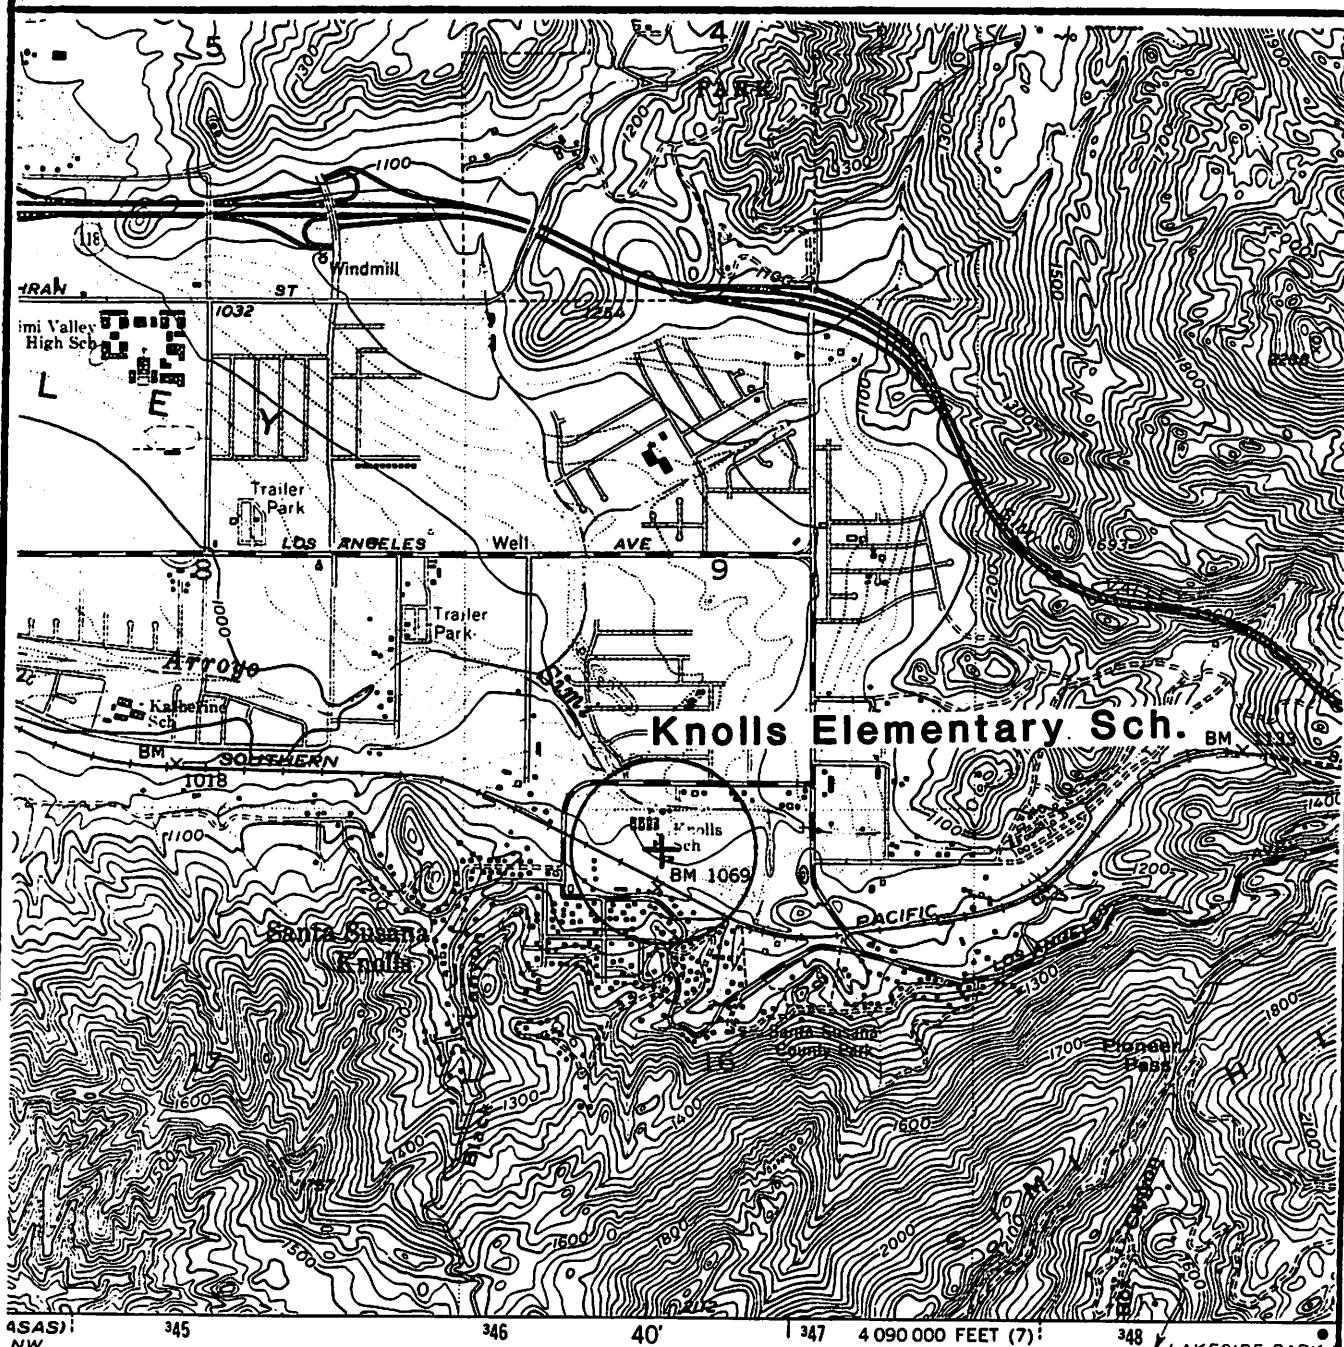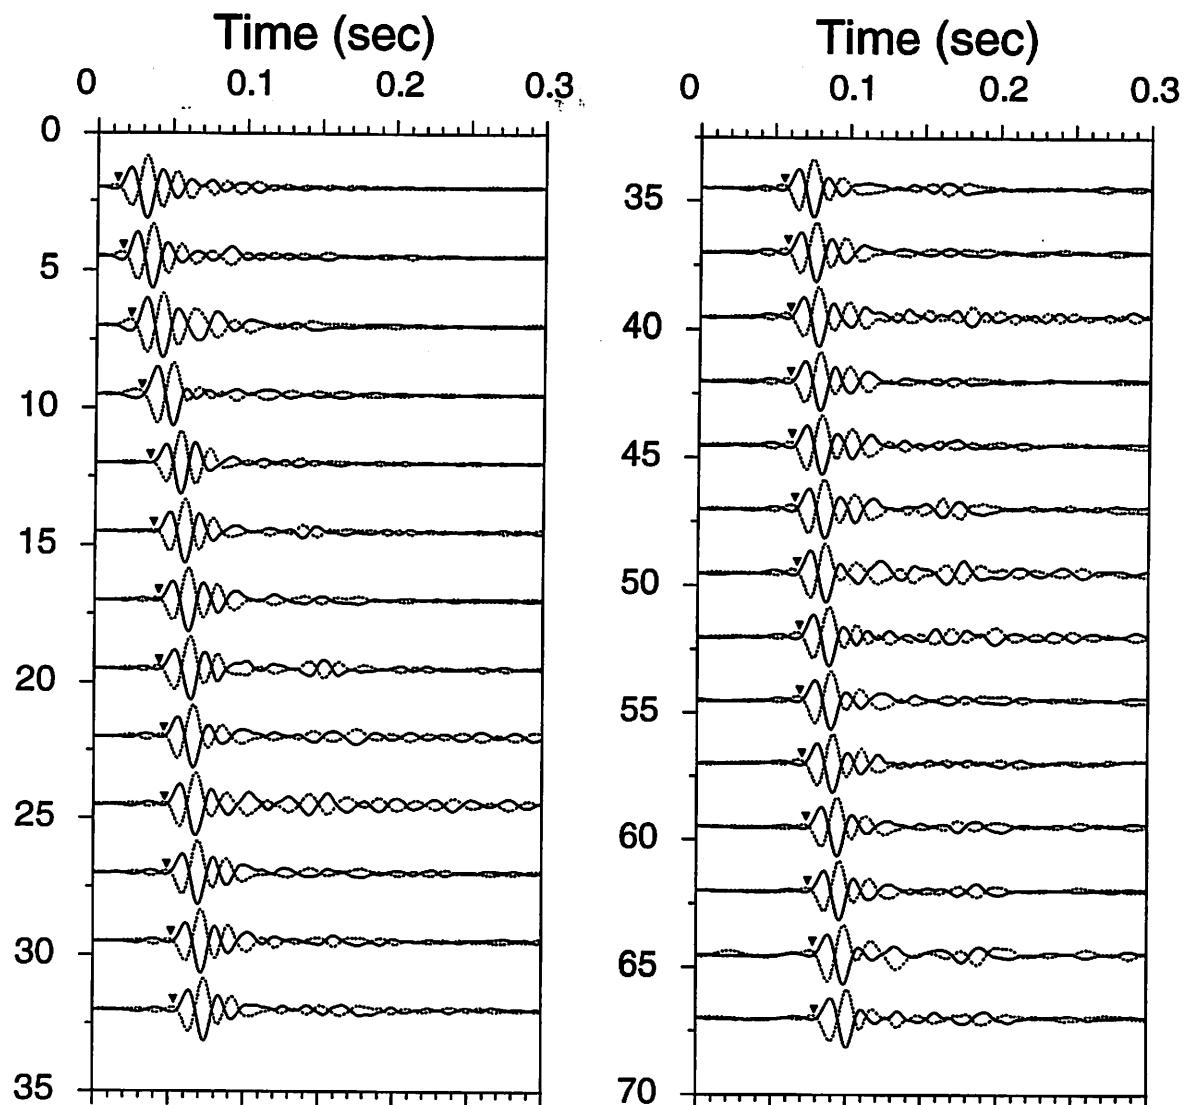

Knolls Elementary School

Figure A-17. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

P-WAVE

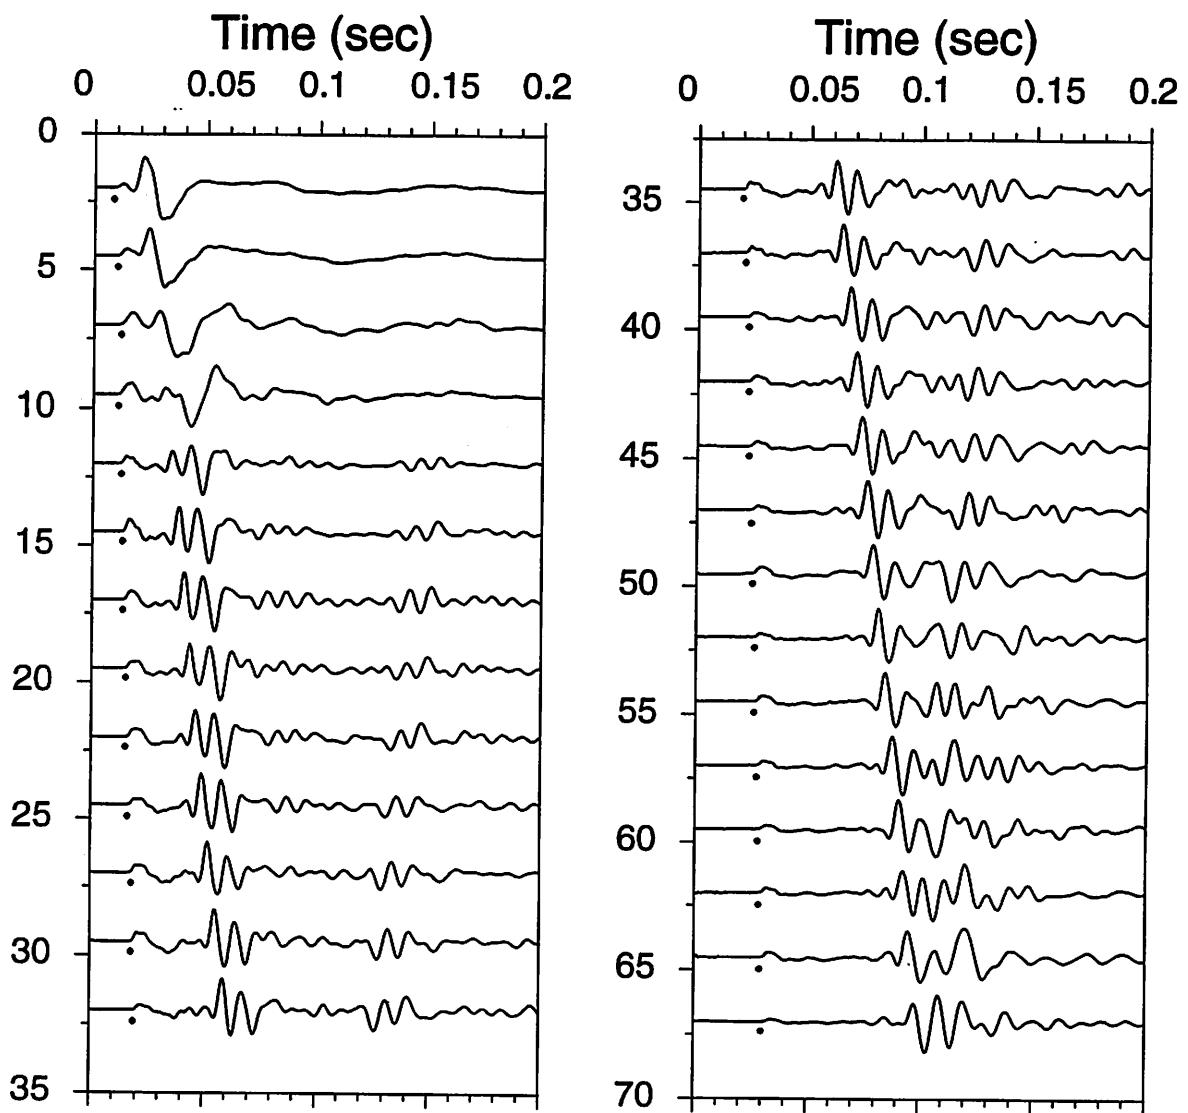

Knolls Elementary School

Figure A-18. Vertical component record section. Approximate P-wave arrivals are indicated by the solid circles.

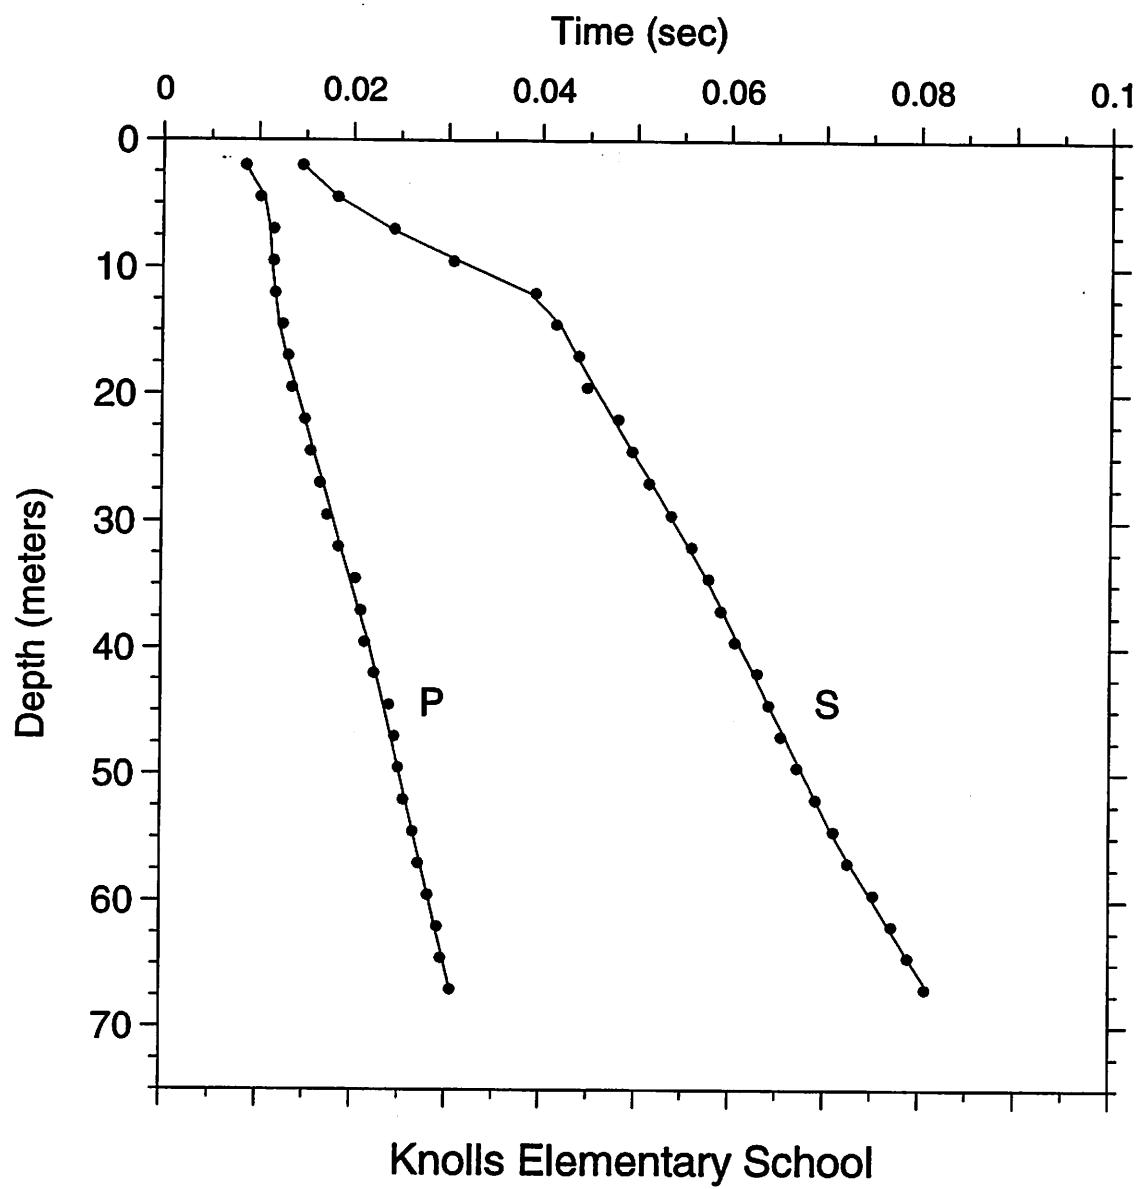


Figure A-19. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Knolls Elementary School (KES)

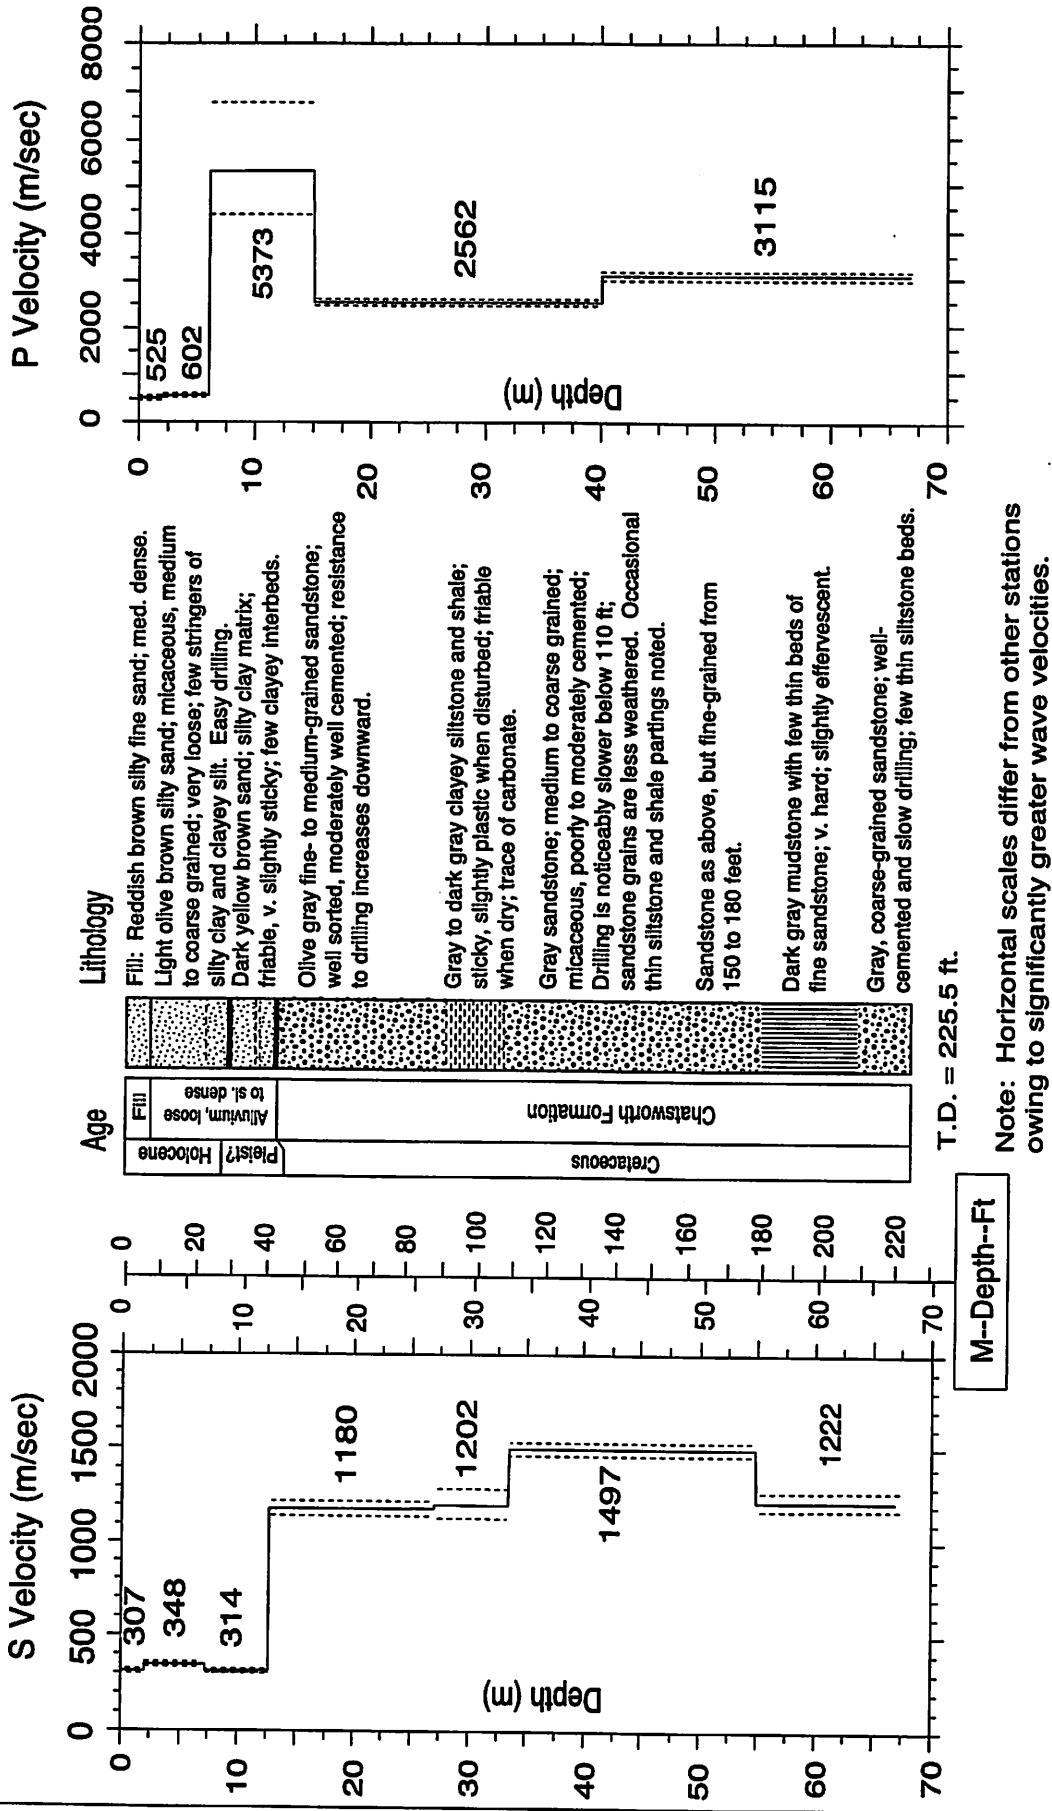


Figure A-20. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-7. S-wave arrival times and velocity summaries.

Location:	Knolls Elementary School	Coordinates:	34.26330	118.66640	Hole_Code:	274							
offset =	4.00	travel-time file:	KESS.TT		layers =	7							
d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	rsdl(sec)	dtb(ft)	thk(ft)	v(m/s)	vu(ft/s)	dtb(ft)	thk(ft)	v(m/s)	vu(ft/s)	
6.6	0.0146	0.0065	307	1	2.0	307	300	316	6.6	1009	983	1035	
2.0	14.8	0.0183	0.0137	329	1	7.3	348	340	356	24.0	17.4	1141	1116
4.5	23.0	0.0243	0.0209	335	1	0.0003	12.8	5.5	322	42.0	18.0	1030	1167
7.0	31.2	0.0306	0.0288	330	1	-0.0006	27.0	14.2	1141	88.6	46.6	3872	1056
9.5	39.4	0.0393	0.0367	327	1	0.0006	33.5	6.5	1202	1130	109.9	3743	4009
12.0	47.6	0.0415	0.0407	356	1	-0.0004	55.0	21.5	1462	1534	21.3	3945	4215
14.5	55.8	0.0439	0.0428	397	1	0.0003	67.5	12.5	1222	1176	180.4	4911	5033
17.0	64.0	0.0448	0.0449	434	1	-0.0007					70.5	4795	4172
19.5	72.2	0.0481	0.0471	468	1	0.0006					4008	3857	
22.0	80.4	0.0496	0.0492	498	1	0.0000							
24.5	88.6	0.0514	0.0513	526	1	-0.0002							
27.0	96.8	0.0538	0.0534	553	1	0.0001							
29.5	105.0	0.0560	0.0555	577	1	0.0002							
32.0	113.2	0.0578	0.0574	601	1	0.0011							
34.5	121.4	0.0591	0.0590	627	1	-0.0002							
37.0	129.6	0.0606	0.0607	651	1	-0.0003							
39.5	137.8	0.0630	0.0624	673	1	-0.0004							
42.0	146.0	0.0642	0.0640	695	1	0.0000							
44.5	154.2	0.0655	0.0657	715	1	-0.0003							
47.0	162.4	0.0672	0.0674	735	1	-0.0003							
49.5	170.6	0.0692	0.0691	753	1	0.0000							
52.0	178.8	0.0711	0.0707	771	1	0.0002							
54.5	187.0	0.0726	0.0727	784	1	-0.0002							
57.0	195.2	0.0753	0.0747	796	1	0.0004							
62.0	203.4	0.0772	0.0768	807	1	0.0003							
64.5	211.6	0.0789	0.0788	818	1	0.0000							
67.0	219.8	0.0807	0.0809	828	1	-0.0003							

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-Wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model.
- vavg(m/s) = average velocity from the surface to each depth,
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- vsl(sec) = residual (observed - fitted travel time), in secs (see text for explanation of velocity limits)
- dtb(m) = depth to bottom in meters
- thk(m) = thickness of layer in meters
- vl(m/s) = lower limit of velocity in meters per second
- vu(m/s) = upper limit of velocity in meters per second (limits)
- dtb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- vl(ft/s) = velocity in feet per second
- vu(ft/s) = lower limit of velocity in feet per second
- vvu(ft/s) = upper limit of velocity in feet per second

TABLE A-8. P-wave arrival times and velocity summaries.

Location:	Knolls Elementary School	Coordinates:	34.26330	118.66640	Hole Code:	274
offset =	4.00	travel-time file:	KESP.TT	nlayers =	5	
d(m)	d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)
2.0	6.6	0.0086	0.0038	525	1	0.0001
4.5	14.8	0.0102	0.0080	565	1	-0.0004
7.0	23.0	0.0116	0.0106	658	1	-0.0006
9.5	31.2	0.0116	0.0111	855	1	-0.0002
12.0	39.4	0.0118	0.0116	1037	1	-0.0000
14.5	47.6	0.0126	0.0120	1205	1	0.0004
17.0	55.8	0.0132	0.0129	1317	1	-0.0002
19.5	64.0	0.0136	0.0139	1404	1	-0.0004
22.0	72.2	0.0150	0.0149	1480	1	-0.0003
24.5	80.4	0.0156	0.0158	1547	1	-0.0003
27.0	88.6	0.0166	0.0168	1606	1	-0.0003
29.5	96.8	0.0174	0.0178	1658	1	-0.0005
32.0	105.0	0.0186	0.0188	1705	1	-0.0002
34.5	113.2	0.0204	0.0197	1748	1	-0.0002
37.0	121.4	0.0210	0.0207	1786	1	0.0002
39.5	129.6	0.0214	0.0217	1821	1	-0.0004
42.0	137.8	0.0224	0.0225	1864	1	-0.0002
44.5	146.0	0.0240	0.0233	1907	1	0.0002
47.0	154.2	0.0246	0.0241	1948	1	0.0004
49.5	162.4	0.0250	0.0249	1985	1	0.0000
52.0	170.6	0.0256	0.0257	2020	1	-0.0002
54.5	178.8	0.0266	0.0265	2053	1	0.0000
57.0	187.0	0.0272	0.0273	2085	1	-0.0002
59.5	195.2	0.0282	0.0281	2114	1	0.0000
62.0	203.4	0.0292	0.0289	2142	1	0.0002
64.5	211.6	0.0296	0.0298	2168	1	-0.0002
67.0	219.8	0.0306	0.0306	2193	2	0.0000

Explanation:
d(m) = depth in meters
d(ft) = depth in feet
tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
tvrt(s) = vertical travel time computed from the model
vavg(m/s) = average velocity from the surface to each depth, computed as $\text{avg_vel} = d(\text{m})/\text{tvrt}(\text{s})$
sig = sigma, standard deviation normalized to the standard deviation of best picks
rsdl(sec) = residual (observed - fitted travel time), in secs
dtb(m) = depth to bottom in meters
dtb(ft) = depth to bottom of layer in feet
thk(m) = thickness of layer in meters
thk(ft) = thickness of layer in feet
vl(m/s) = velocity in meters per second
vl(ft/s) = velocity in feet per second
vu(m/s) = upper limit of velocity in meters per second
vu(ft/s) = upper limit of velocity in feet per second
vl(ft/s) = lower limit of velocity in feet per second
vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SAN FERNANDO QUADRANGLE
CALIFORNIA—LOS ANGELES CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

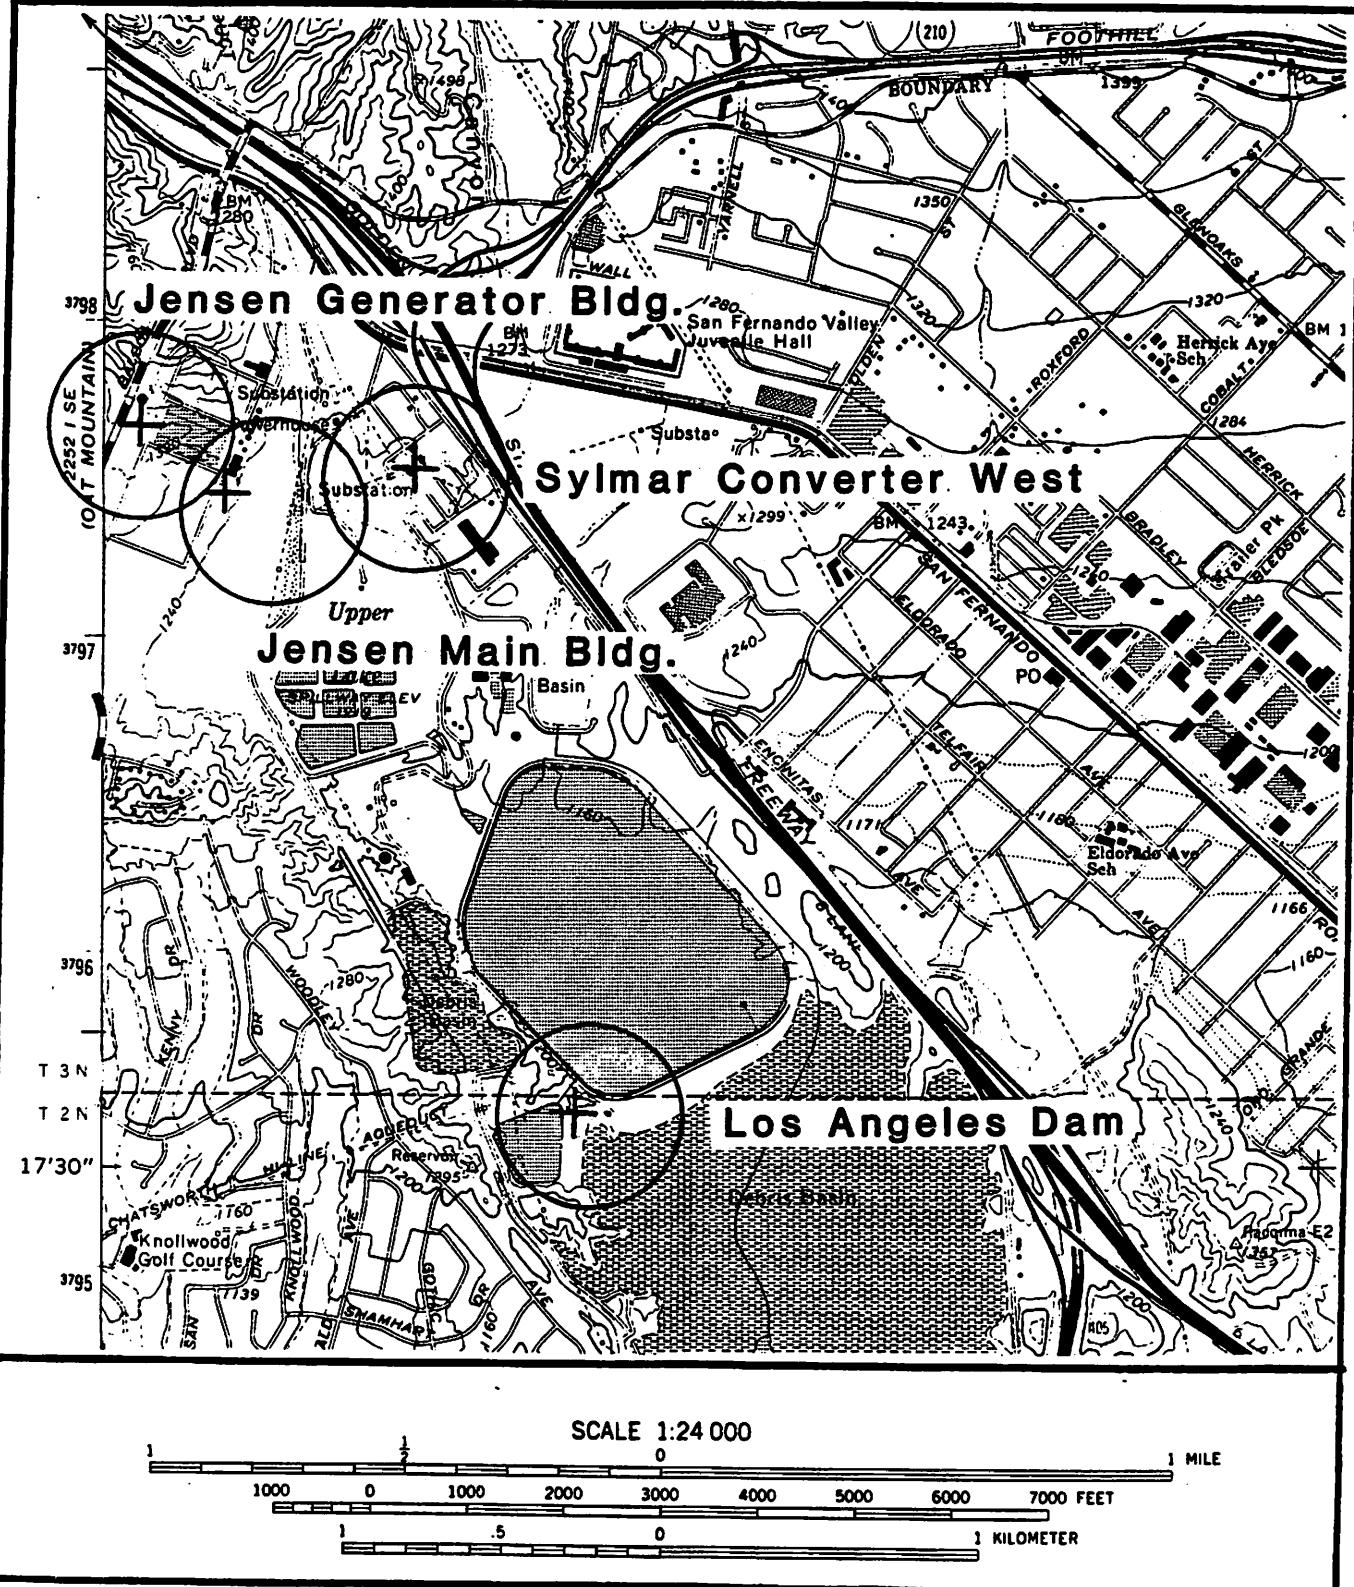


Figure A-21. Site location map for the borehole at Los Angeles Dam. The accelerograph is located approximately 35 meters from the borehole.

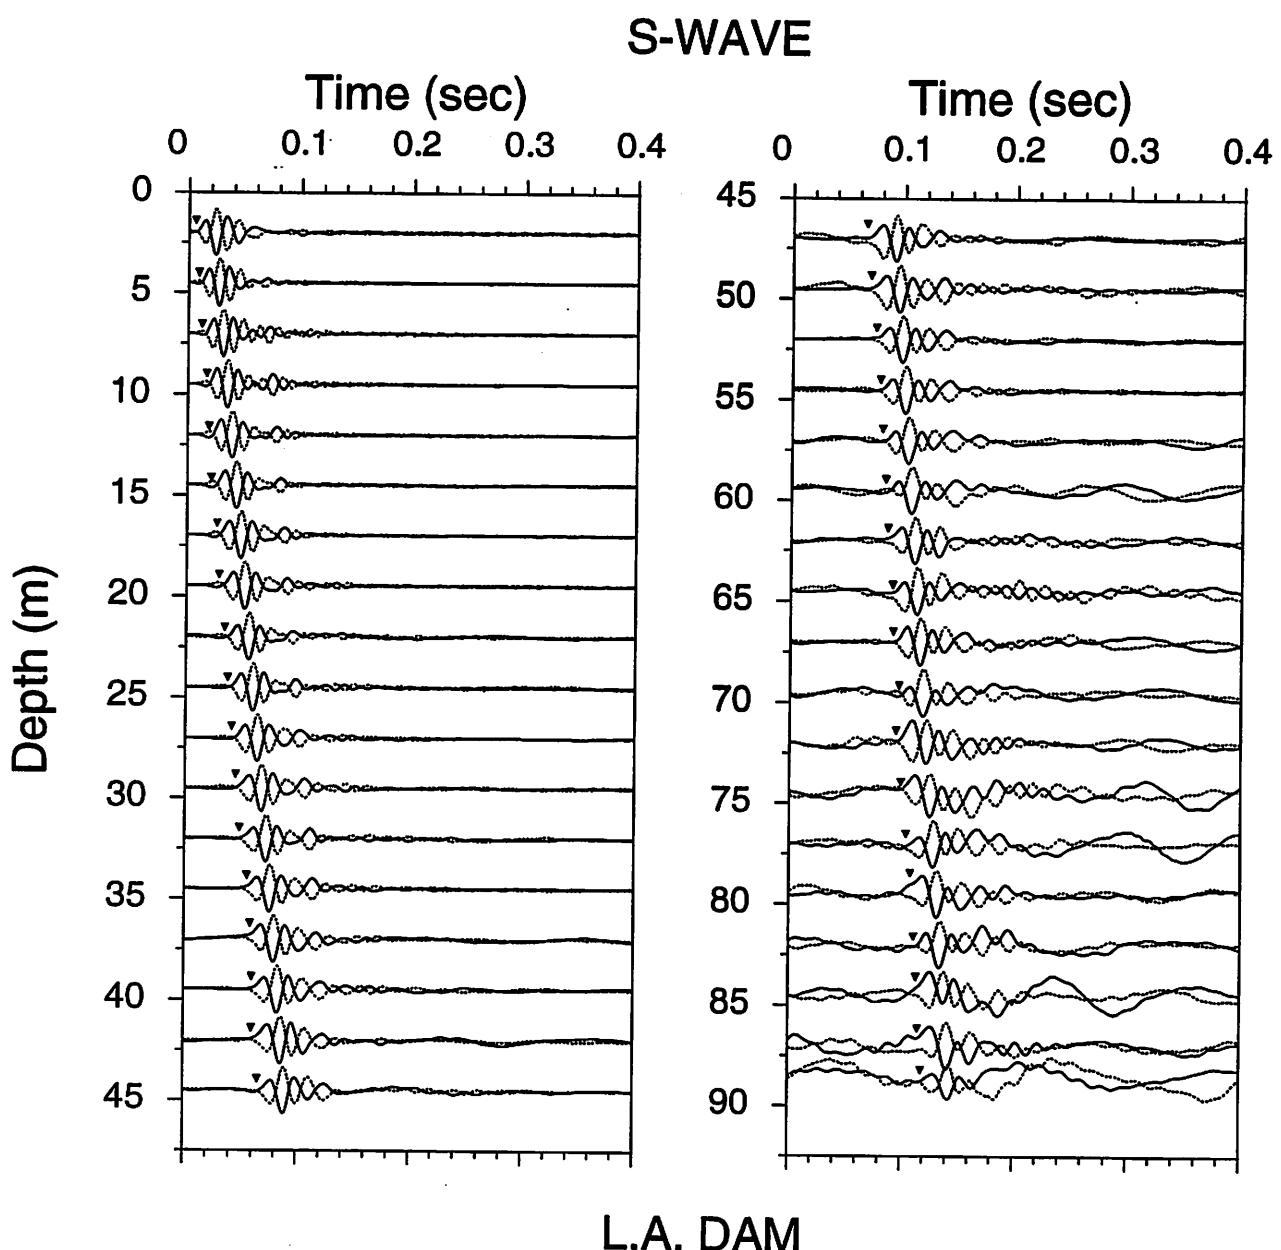


Figure A-22. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

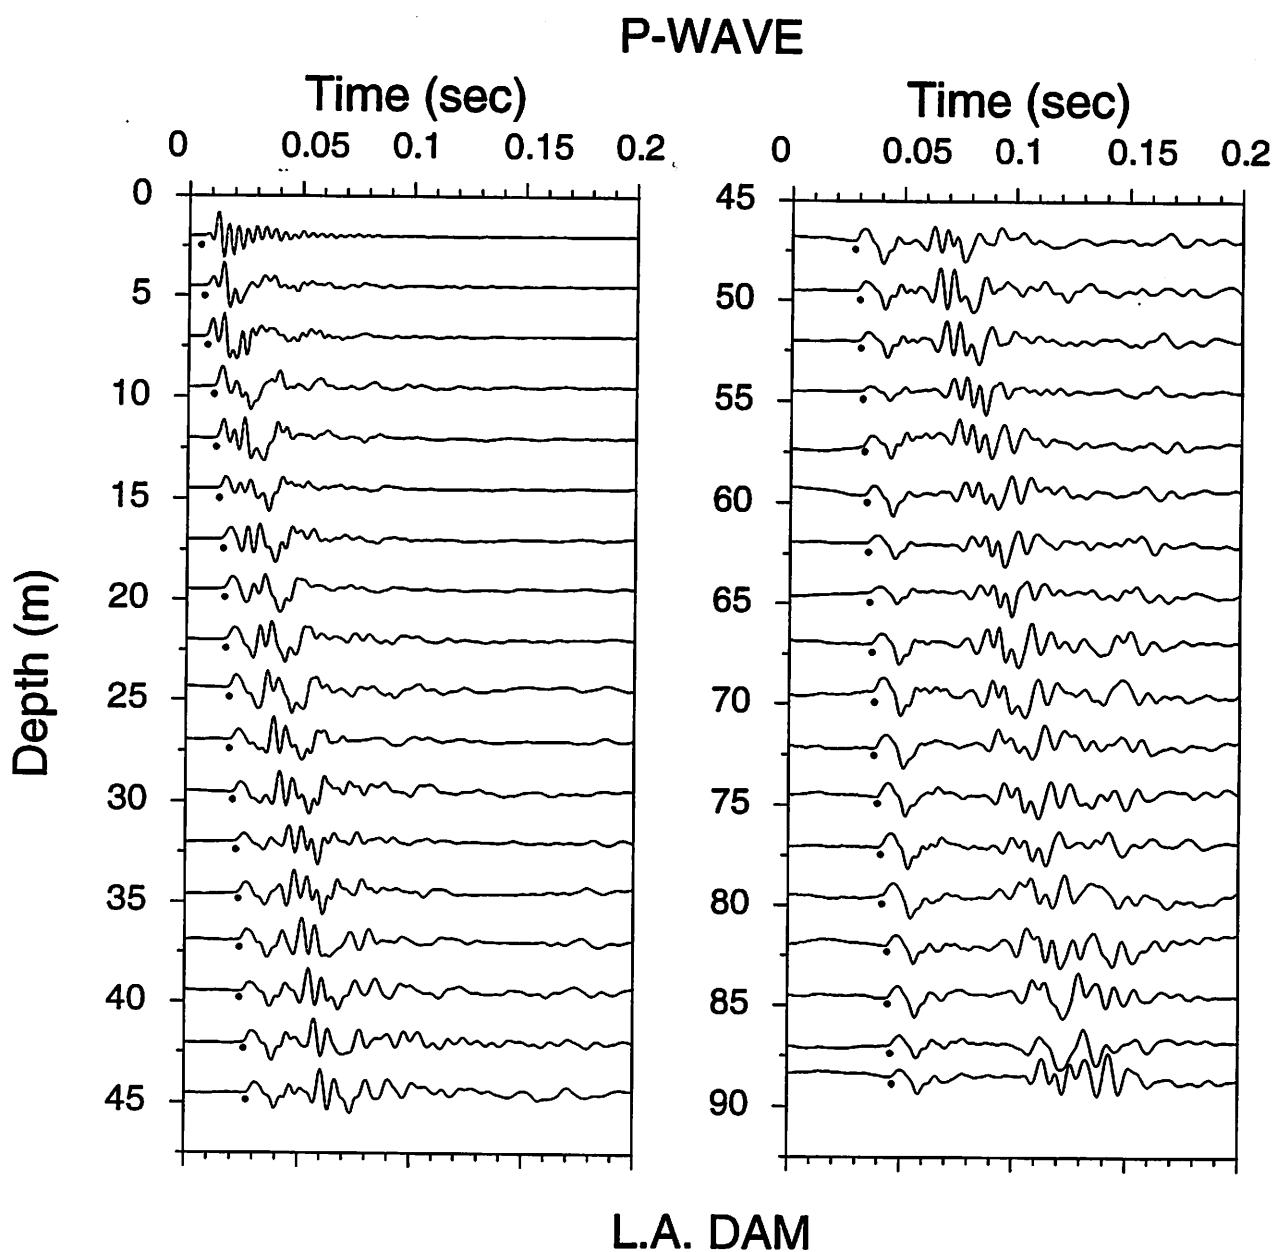


Figure A-23. Vertical component record section. Approximate P-wave arrivals are indicated by the solid circles.

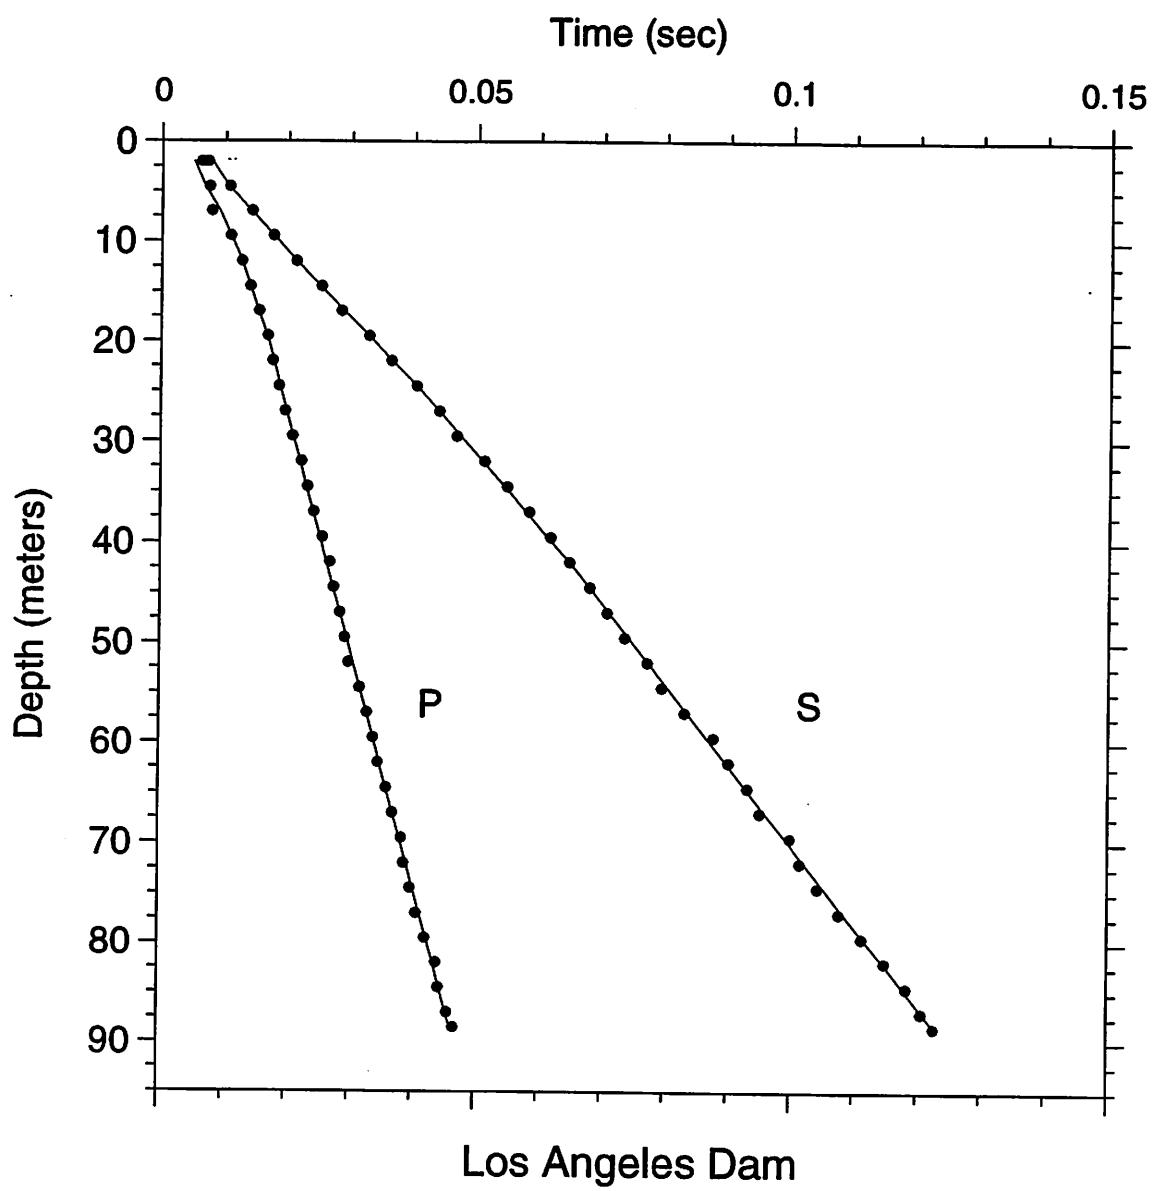


Figure A-24. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Los Angeles Dam (LAD)

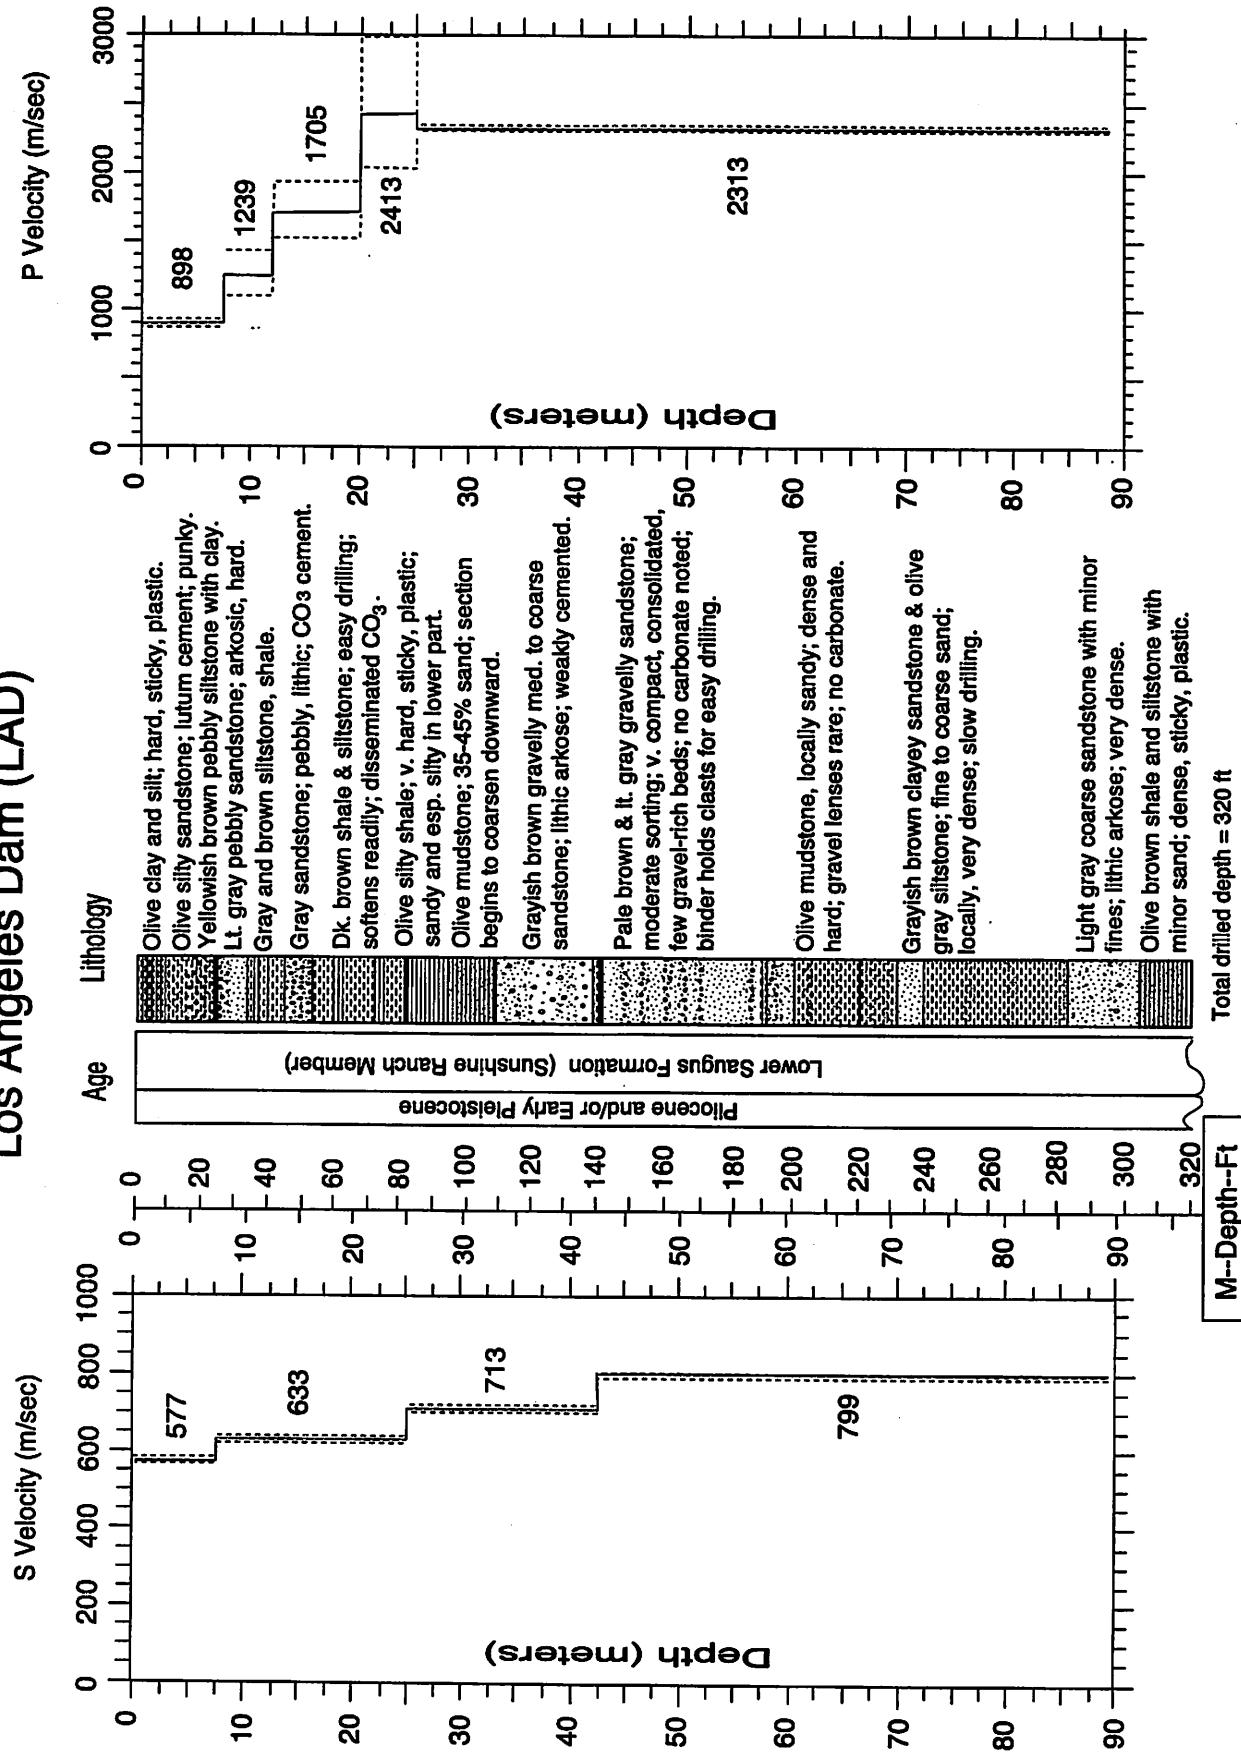


Figure A-25. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-9. S-Wave arrival times and velocity summaries.

Location: Los Angeles Dam offset = 4.00	Travel-time file: lads.tt	Coordinates:		34.29310	118.48390	Hole_Code: 273
d(m)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	nlayers = 4
2.0	6.6	0.0072	0.0035	577	-0.0006	dtb(m) thk(m) v(m/s) vu(m/s) vu(ft/s) v(ft/s)
4.5	14.8	0.0106	0.0078	577	1	7.6 577 587 24.9 1891 1859
7.0	23.0	0.0142	0.0121	577	1	17.4 633 624 82.0 57.1 1925
9.5	31.2	0.0176	0.0162	587	1	17.5 713 704 723 139.4 2103
12.0	39.4	0.0212	0.0201	596	1	88.5 799 794 805 57.4 2340
14.5	47.6	0.0252	0.0241	602	1	60.0 794 805 290.4 150.9 2310
17.0	55.8	0.0284	0.0280	606	1	60.6 -0.0004
19.5	64.0	0.0328	0.0320	609	1	60.9 0.0001
22.0	72.2	0.0364	0.0359	612	1	72.2 -0.0001
24.5	80.4	0.0404	0.0399	614	1	80.4 0.0001
27.0	88.6	0.0440	0.0435	621	1	88.6 0.0000
29.5	96.8	0.0468	0.0470	628	1	96.8 -0.0006
32.0	105.0	0.0512	0.0505	634	1	105.0 0.0003
34.5	113.2	0.0543	0.0540	639	1	113.2 0.0004
37.0	121.4	0.0584	0.0575	643	1	121.4 0.0005
39.5	129.6	0.0618	0.0610	647	1	129.6 0.0005
42.0	137.8	0.0648	0.0645	651	1	137.8 0.0005
44.5	146.0	0.0680	0.0677	657	1	146.0 0.0000
47.0	154.2	0.0708	0.0709	663	1	154.2 -0.0003
49.5	162.4	0.0736	0.0740	669	1	162.4 -0.0006
52.0	170.6	0.0772	0.0771	674	1	170.6 -0.0001
54.5	178.8	0.0796	0.0802	679	1	178.8 -0.0009
57.0	187.0	0.0832	0.0834	684	1	187.0 -0.0004
59.5	195.2	0.0878	0.0865	688	1	195.2 0.0011
62.0	203.4	0.0902	0.0896	692	1	203.4 0.0004
64.5	211.6	0.0932	0.0927	695	1	211.6 0.0003
67.0	219.8	0.0952	0.0959	699	1	219.8 -0.0008
69.5	228.0	0.1000	0.0990	702	1	228.0 0.0008
72.0	236.2	0.1016	0.1021	705	2	236.2 0.0007
74.5	244.4	0.1044	0.1053	708	2	244.4 -0.0010
77.0	252.6	0.1078	0.1084	710	2	252.6 -0.0007
79.5	260.8	0.1114	0.1115	713	2	260.8 -0.0002
82.0	269.0	0.1150	0.1146	715	1	269.0 0.0002
84.5	277.2	0.1184	0.1178	718	3	277.2 0.0005
87.0	285.4	0.1208	0.1209	720	3	285.4 -0.0002
88.5	290.4	0.1228	0.1228	721	3	290.4 -0.0001

Explanation:

d(m) = depth in meters

d(ft) = depth in feet

tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.

tvrt(s) = vertical travel time computed from the model

vavg(m/s) = average velocity from the surface to each depth, computed as avg vel = d(m)/tvrt(s)

sig = sigma, standard deviation normalized to the standard deviation of best picks

rsdl(sec) = residual (observed - fitted travel time), in seccs

dtb(m) = depth to bottom of layer in meters

thk(m) = thickness of layer in meters

v(m/s) = velocity of layer in meters per second

vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)

vu(m/s) = upper limit of velocity in meters per second

dtb(ft) = depth to bottom of layer in feet

thk(ft) = thickness of layer in feet

v(ft/s) = velocity of layer in feet per second

vl(ft/s) = lower limit of velocity in feet per second

vu(ft/s) = upper limit of velocity in feet per second

TABLE A-10. P-wave arrival times and velocity summaries.

Location:	Los Angeles Dam	Coordinates:	34.29310	118.48390	Hole_Code:	273								
Offset =	4.00	travel-time file:	ladpt.tt	nlayers =	5									
d(ft)	ts(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)	vt(ft/s)			
2.0	6.6	0.0062	0.002	898	0.0012	7.6	7.6	898	868	929	24.9	2946	2849	3049
4.5	14.8	0.0074	0.0050	898	1	12.0	4.4	1239	1098	1422	39.4	14.4	4066	3604
7.0	23.0	0.0078	0.0078	898	1	20.0	8.0	1705	1532	1921	65.6	26.2	5593	5027
9.5	31.2	0.0108	0.0100	950	1	25.0	5.0	2413	2032	2969	82.0	16.4	7915	6667
12.0	39.4	0.0126	0.0120	999	1	32.0	6.3	2313	2290	2337	290.4	208.3	7589	7512
14.5	47.6	0.0140	0.0135	1076	0.0000	88.5	63.5	2290	2290	2337				
17.0	55.8	0.0154	0.0149	1137	0.0001									
19.5	64.0	0.0168	0.0164	1188	0.0001									
22.0	72.2	0.0176	0.0175	1255	1									
24.5	80.4	0.0186	0.0186	1319	1									
27.0	88.6	0.0196	0.0196	1374	1									
29.5	96.8	0.0208	0.0207	1423	1									
32.0	105.0	0.0222	0.0218	1468	1									
34.5	113.2	0.0232	0.0229	1507	0.0002									
37.0	121.4	0.0242	0.0240	1544	0.0001									
39.5	129.6	0.0256	0.0250	1577	1									
42.0	137.8	0.0268	0.0261	1607	0.0006									
44.5	146.0	0.0274	0.0272	1635	0.0001									
47.0	154.2	0.0284	0.0283	1661	0.0000									
49.5	162.4	0.0292	0.0294	1685	1									
52.0	170.6	0.0298	0.0305	1708	1									
54.5	178.8	0.0316	0.0315	1728	1									
57.0	187.0	0.0328	0.0326	1748	0.0001									
59.5	195.2	0.0338	0.0337	1766	1									
62.0	203.4	0.0346	0.0348	1783	0.0002									
64.5	211.6	0.0360	0.0359	1799	1									
67.0	219.8	0.0370	0.0369	1814	0.0001									
69.5	228.0	0.0384	0.0380	1828	1									
72.0	236.2	0.0388	0.0391	1841	0.0003									
74.5	244.4	0.0398	0.0402	1854	1									
77.0	252.6	0.0408	0.0413	1866	0.0005									
79.5	260.8	0.0422	0.0423	1878	1									
82.0	269.0	0.0440	0.0434	1888	0.0002									
84.5	277.2	0.0444	0.0445	1899	1									
87.0	285.4	0.0458	0.0456	1909	1									
88.5	290.4	0.0468	0.0462	1914	1									

Explanation:

d(m) = depth in meters
d(ft) = depth in feet
ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.

tvrt(s) = vertical travel time computed from the model, computed as avg_vrt = d(m)/tvrt(s)
vavg(m/s) = average velocity from the surface to each depth, sig = sigma, standard deviation normalized to the standard deviation of best picks

rsdl(sec) = residual (observed - fitted travel time), in secs
dtb(m) = depth to bottom of layer in meters

thk(m) = thickness of layer in meters
v(m/s) = velocity of layer in meters per second
vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)

vu(m/s) = upper limit of velocity in meters per second
dtb(ft) = depth to bottom of layer in feet
thk(ft) = thickness of layer in feet
vf(ft/s) = velocity of layer in feet per second

vl(ft/s) = lower limit of velocity in feet per second
vu(ft/s) = upper limit of velocity in feet per second

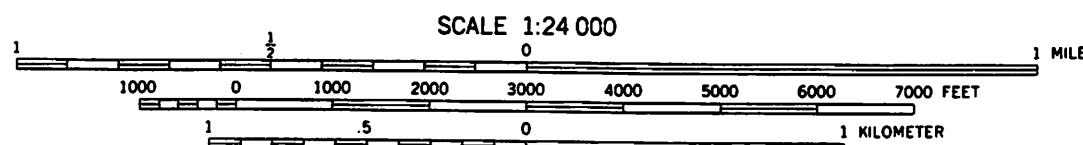
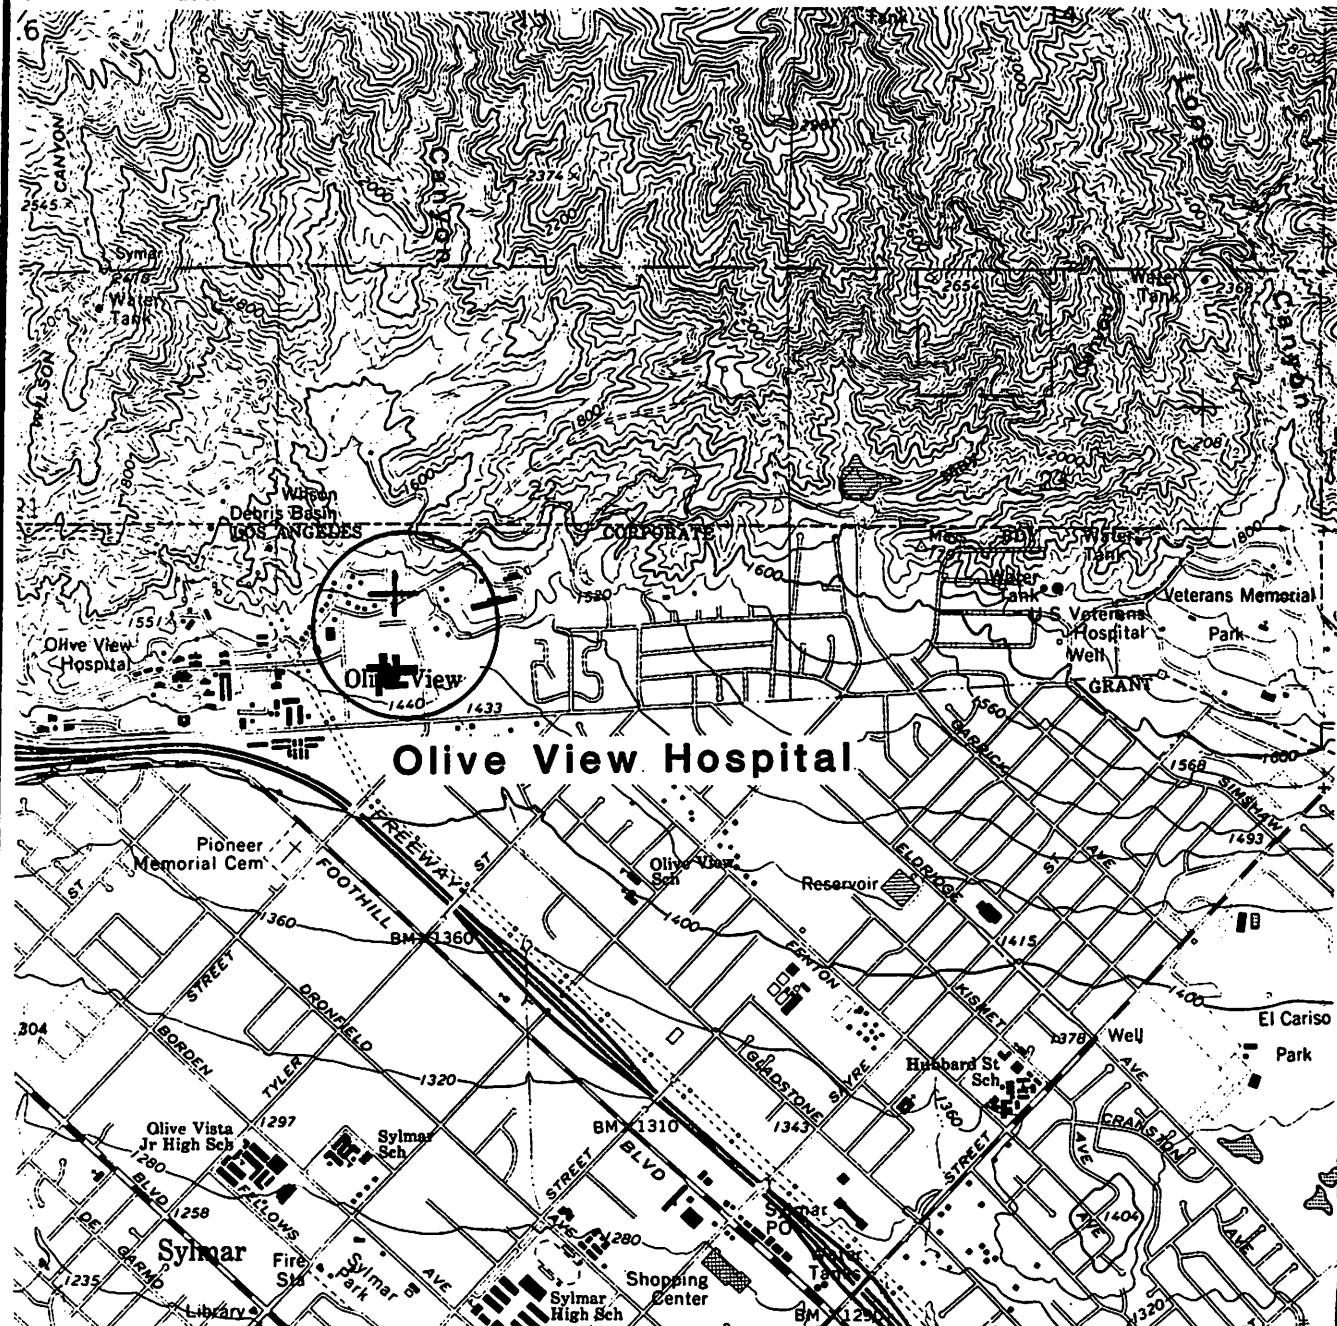


Figure A-26. Site location map for the borehole at Olive View Hospital. The accelerograph is located approximately 30 meters from the borehole. Another borehole near this site, "Oliveview" was published in USGS Open-File Report 82-833 and was located $\frac{1}{2}$ kilometer southwest from the Olive View Hospital site shown above.

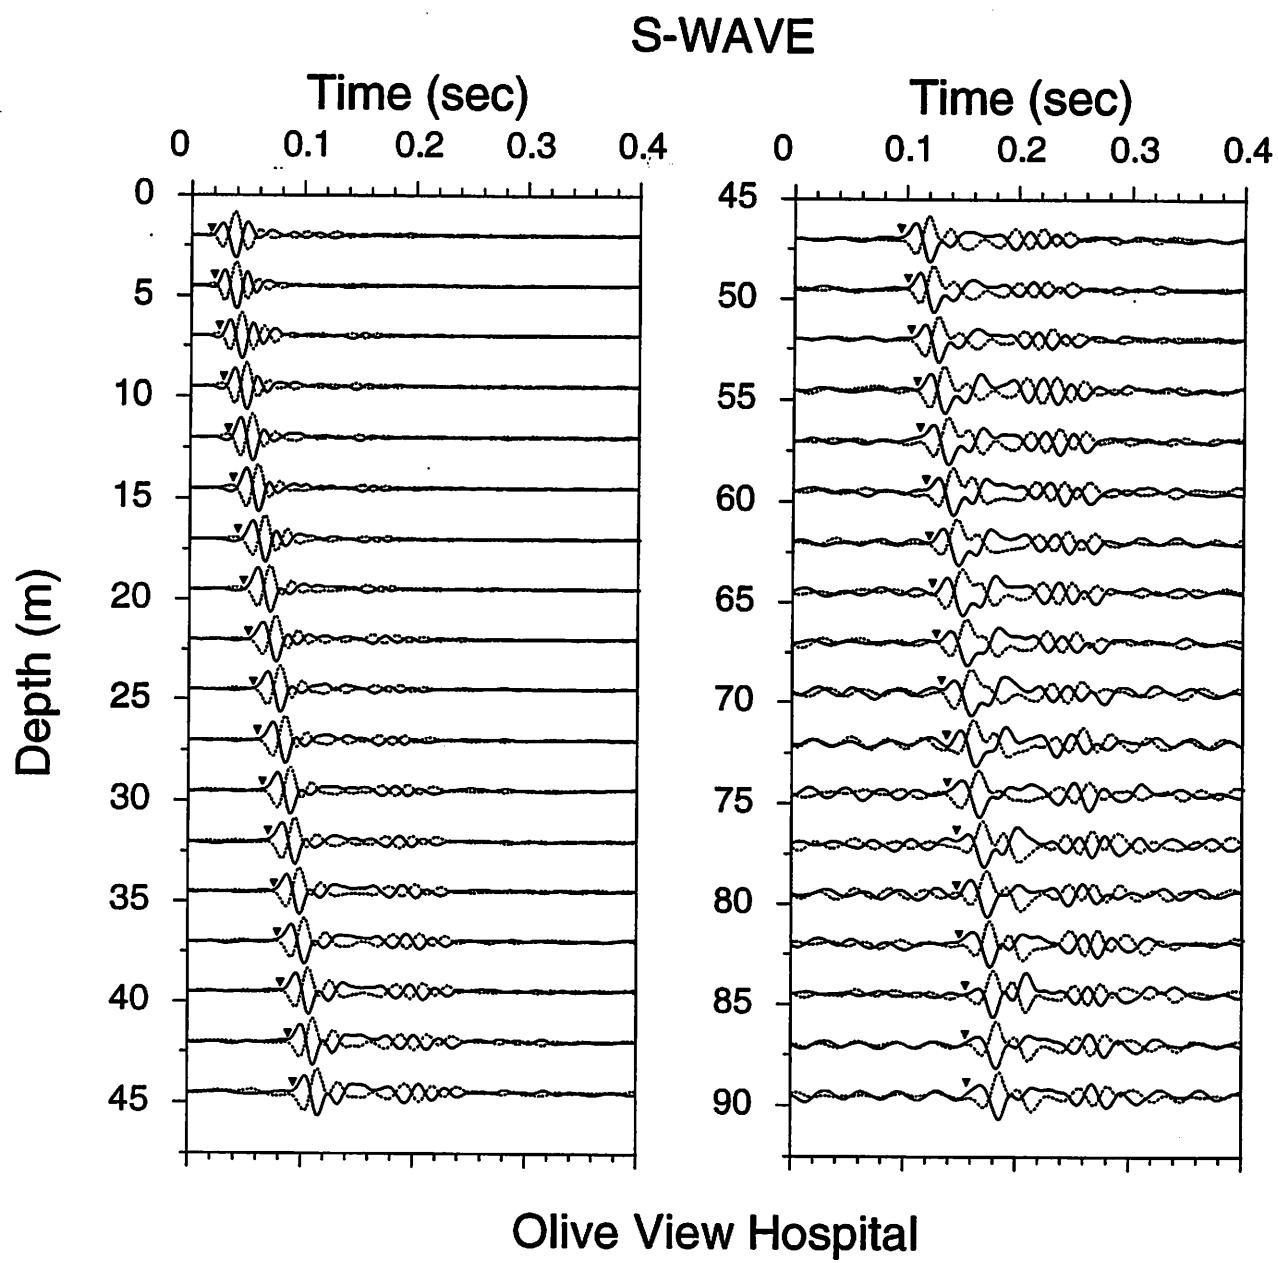


Figure A-27. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

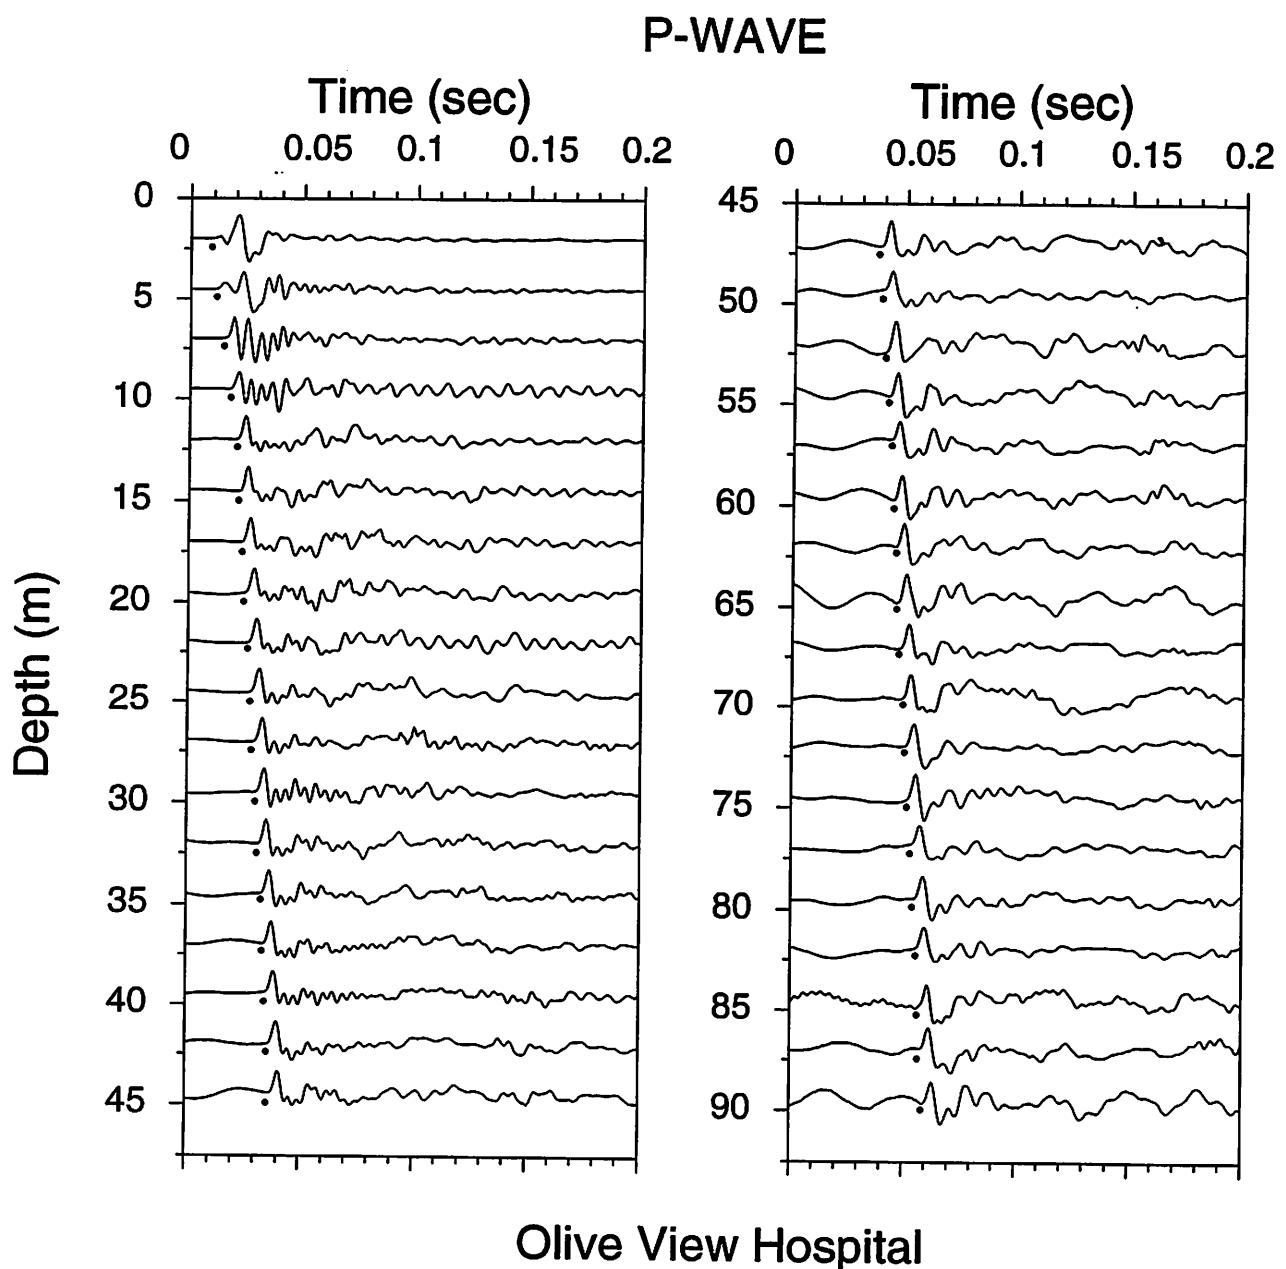


Figure A-28. Vertical component record section. Approximate P-wave arrivals are indicated by the solid circles.

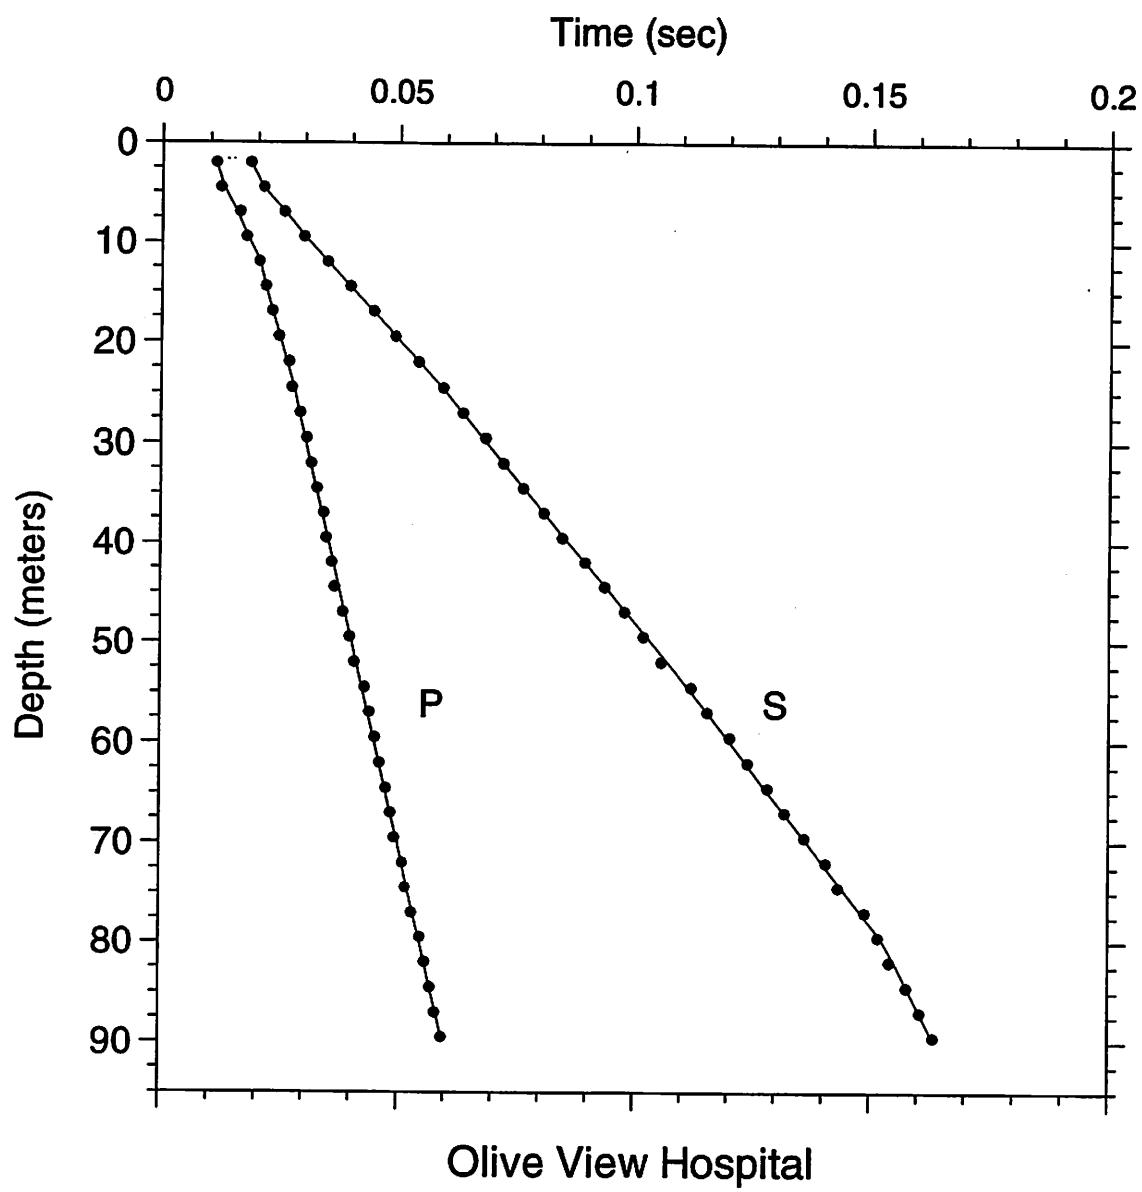


Figure A-29. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Olive View Hospital (OVH)

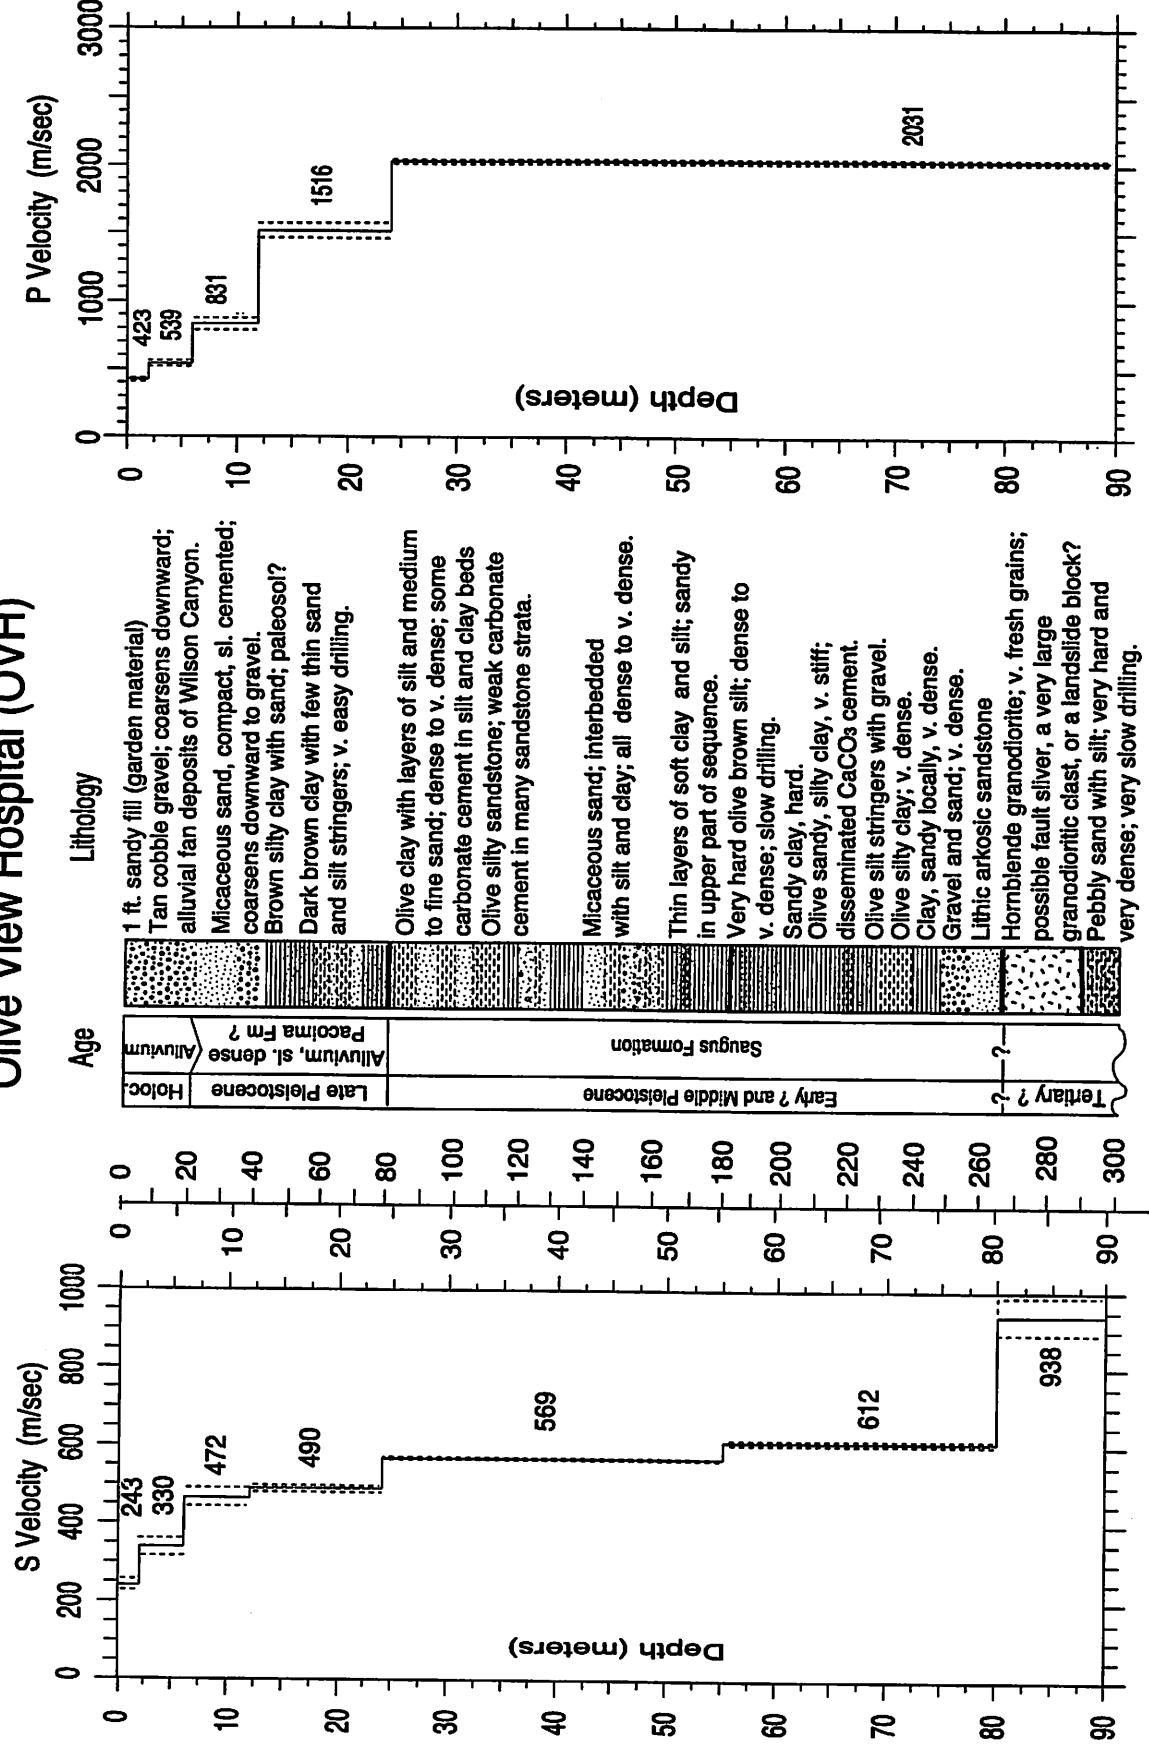


Figure A-30. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-11. S-Wave arrival times and velocity summaries.

Location: Olive View Hospital		Coordinates: 34.32810 118.44420		Hole_Code:	276
offset = 4.00	travel-time file: ovh2s.tt	nlayers =	7		
d(ft)	ts(s)	tvrt(s)	vavg(m/s)	rsdl(sig)	dtb(m) thk(m) v(m/s) vu(m/s) vlt(ft/s) vlt(ft/s) vu(ft/s)
2.0	0.0184	0.0092	243	1	2.0 243 236 250 6.6 797 775 819
4.5	0.0212	0.0158	284	1	6.0 330 317 343 19.7 1081 1041 1124
7.0	0.0256	0.0225	311	1	12.0 472 453 493 39.4 1549 1485 1618
9.5	0.0298	0.0278	342	1	24.0 490 482 499 78.7 1608 1580 1637
12.0	0.0348	0.0331	363	1	55.0 31.0 569 573 180.4 101.7 1866 1854
14.5	0.0396	0.0382	380	1	80.0 25.0 612 606 262.5 82.0 2008 1990
17.0	0.0446	0.0433	393	1	89.5 9.5 938 892 293.6 31.2 3077 2927
19.5	0.0492	0.0484	403	1	
22.0	0.0542	0.0535	411	1	
24.5	0.0594	0.0585	419	1	
27.0	0.0636	0.0628	430	1	
29.5	0.0684	0.0672	439	1	
32.0	0.0722	0.0716	447	1	
34.5	0.0764	0.0750	454	1	
37.0	0.0808	0.0804	460	1	
39.5	0.0848	0.0848	466	1	
42.0	0.0896	0.0892	471	1	
44.5	0.0938	0.0936	475	1	
47.0	0.0980	0.0980	480	1	
49.5	0.1020	0.1024	483	1	
52.0	0.1058	0.1068	487	1	
54.5	0.1122	0.1122	490	1	
57.0	0.1156	0.1153	494	1	
59.5	0.1204	0.1194	498	1	
62.0	0.1242	0.1235	502	1	
64.5	0.1284	0.1276	506	1	
67.0	0.1320	0.1317	509	1	
69.5	0.1362	0.1358	512	1	
72.0	0.1408	0.1398	515	1	
74.5	0.1434	0.1439	518	1	
77.0	0.1490	0.1480	520	1	
79.5	0.1518	0.1521	523	1	
82.0	0.1542	0.1550	529	1	
84.5	0.1578	0.1577	536	1	
87.0	0.1606	0.1604	542	1	
89.5	0.1634	0.1630	549	1	

Explanation:

d(m) = depth in meters
 dtb(m) = depth to bottom of layer in meters
 ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-Wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as avg_vel = (dm)/tvrt(s)
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 vt(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

TABLE A-12. P-Wave arrival times and velocity summaries.

Location:	Olive View Hospital	Coordinates:	34.32810	118.44420	Hole_Code:	276
offset =	4.25	travel-time file:	ovh2p.tt		layers =	5
d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	rsdl(sec)	dtb(ft)	thk(ft)
2.0	6.6	0.0112	0.0047	423	2.0	423
4.5	14.8	0.0122	0.0094	481	6.0	409
7.0	23.0	0.0162	0.0153	524	12.0	539
9.5	31.2	0.0176	0.0164	581	24.0	831
12.0	39.4	0.0204	0.0194	620	-0.0001	1516
14.5	47.6	0.0218	0.0210	690	1	1465
17.0	55.8	0.0232	0.0227	750	1	2031
19.5	64.0	0.0246	0.0243	802	1	2017
22.0	72.2	0.0268	0.0260	847	1	2045
24.5	80.4	0.0274	0.0275	890	1	214.9
27.0	88.6	0.0292	0.0288	939	1	6618
29.5	96.8	0.0306	0.0300	984	1	
32.0	105.0	0.0316	0.0312	1025	1	
34.5	113.2	0.0328	0.0325	1063	1	
37.0	121.4	0.0342	0.0337	1098	1	
39.5	129.6	0.0348	0.0349	1131	1	
42.0	137.8	0.0360	0.0361	1162	1	
44.5	146.0	0.0366	0.0374	1191	1	
47.0	154.2	0.0384	0.0386	1217	1	
49.5	162.4	0.0398	0.0398	1243	1	
52.0	170.6	0.0408	0.0411	1266	1	
54.5	178.8	0.0430	0.0423	1288	1	
57.0	187.0	0.0440	0.0435	1309	1	
59.5	195.2	0.0452	0.0448	1329	1	
62.0	203.4	0.0462	0.0460	1348	1	
64.5	211.6	0.0476	0.0472	1366	1	
67.0	219.8	0.0486	0.0485	1383	1	
69.5	228.0	0.0494	0.0497	1399	1	
72.0	236.2	0.0512	0.0509	1414	1	
74.5	244.4	0.0518	0.0521	1429	1	
77.0	252.6	0.0532	0.0534	1443	1	
79.5	260.8	0.0550	0.0546	1456	1	
82.0	269.0	0.0560	0.0558	1468	1	
84.5	277.2	0.0572	0.0571	1481	1	
87.0	285.4	0.0582	0.0583	1492	1	
89.5	293.6	0.0596	0.0595	1503	1	0.0000

Explanation:
d(m) = depth in meters
d(ft) = depth in feet
tsl(s) = observed arrival time in seconds (from source times used along a slant path). For the arrival times used in the S-Wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
tvrt(s) = vertical travel time computed from the model
vavg(m/s) = average velocity from the surface to each depth, computed as $\text{avg_vel} = d(\text{m})/\text{tvrt}(\text{s})$
sig = sigma, standard deviation normalized to the standard deviation of best picks
rsdl(sec) = residual (observed - fitted travel time), in secs
dtb(m) = depth to bottom of layer in meters
thk(m) = thickness of layer in meters
v(m/s) = velocity of layer in meters per second
vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
vu(m/s) = upper limit of velocity in meters per second
dtb(ft) = depth to bottom of layer in feet
thk(ft) = thickness of layer in feet
v(ft/s) = velocity of layer in feet per second
vl(ft/s) = lower limit of velocity in feet per second
vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SAN FERNANDO QUADRANGLE
CALIFORNIA—LOS ANGELES CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

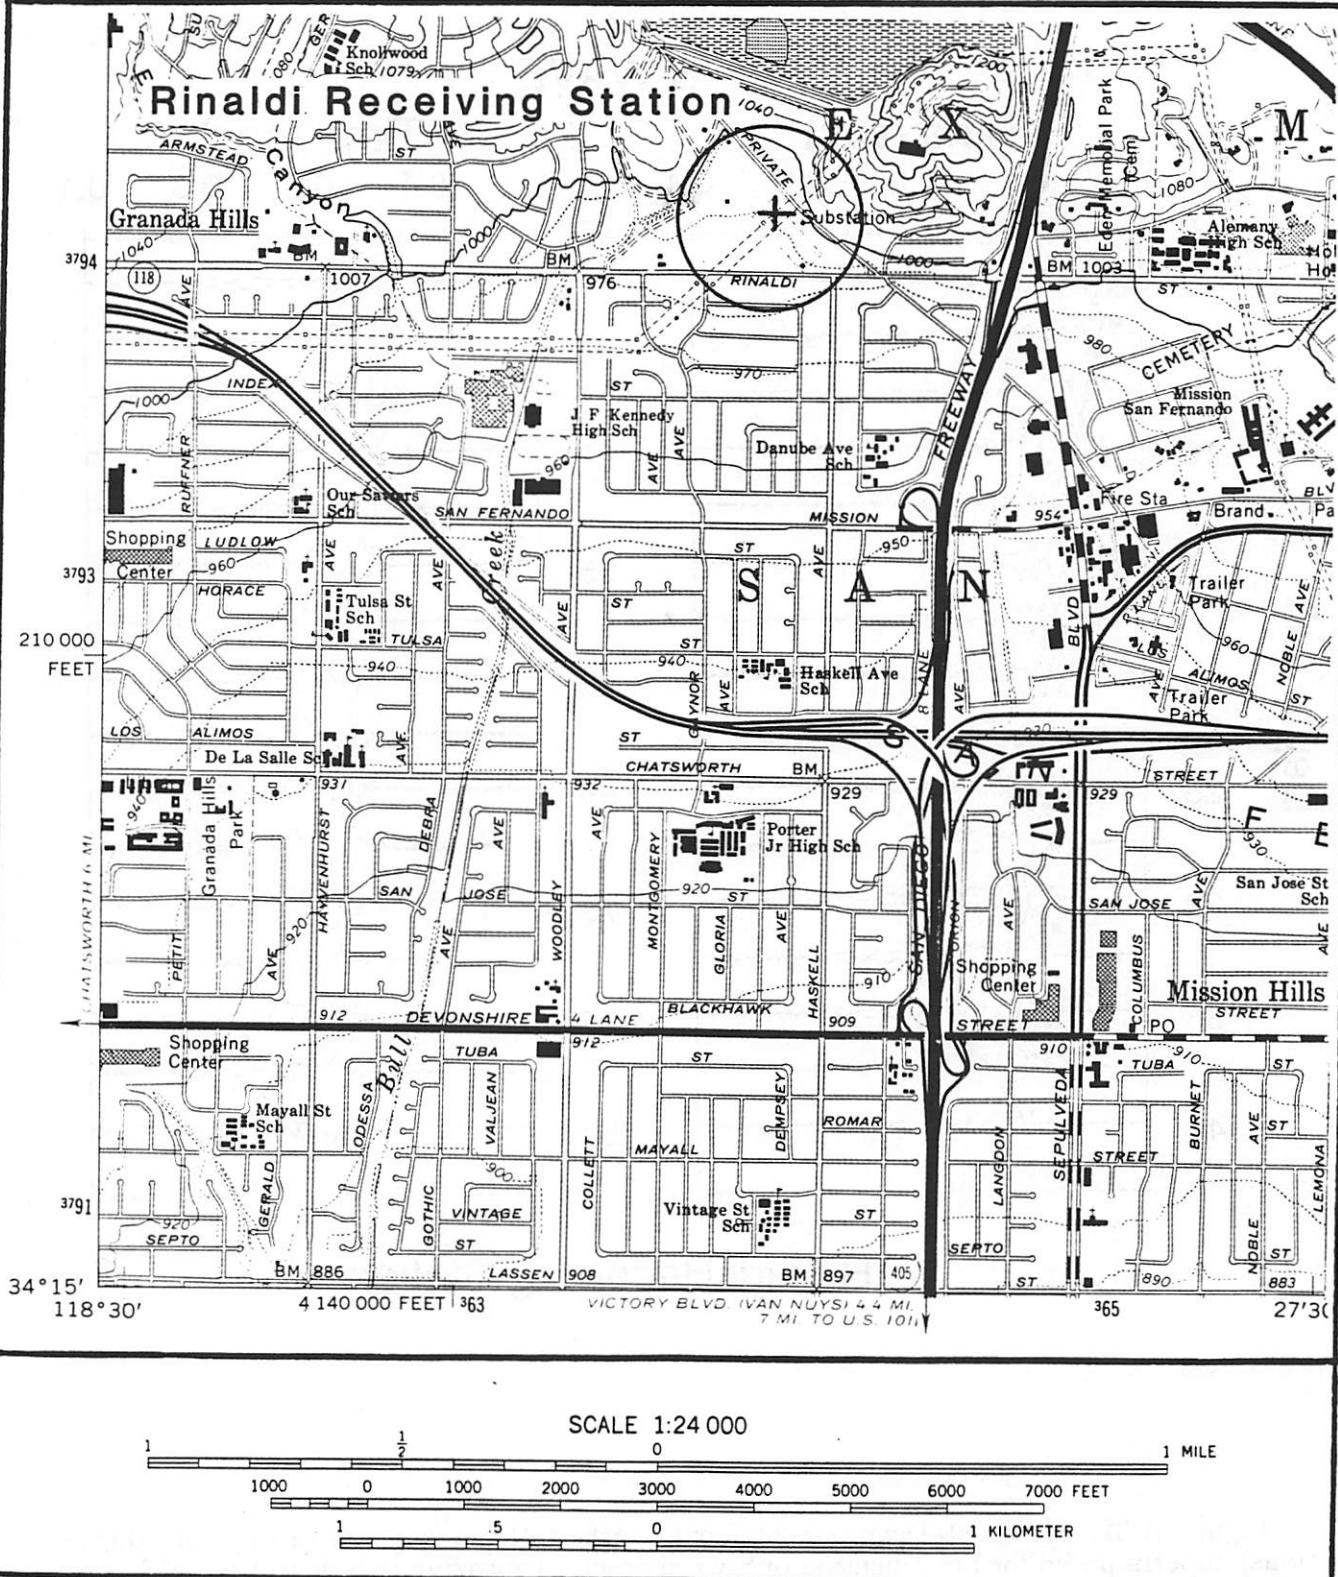


Figure A-31. Site location map for the borehole at Rinaldi Receiving Station. The accelerograph is located approximately 10 meters from the borehole.

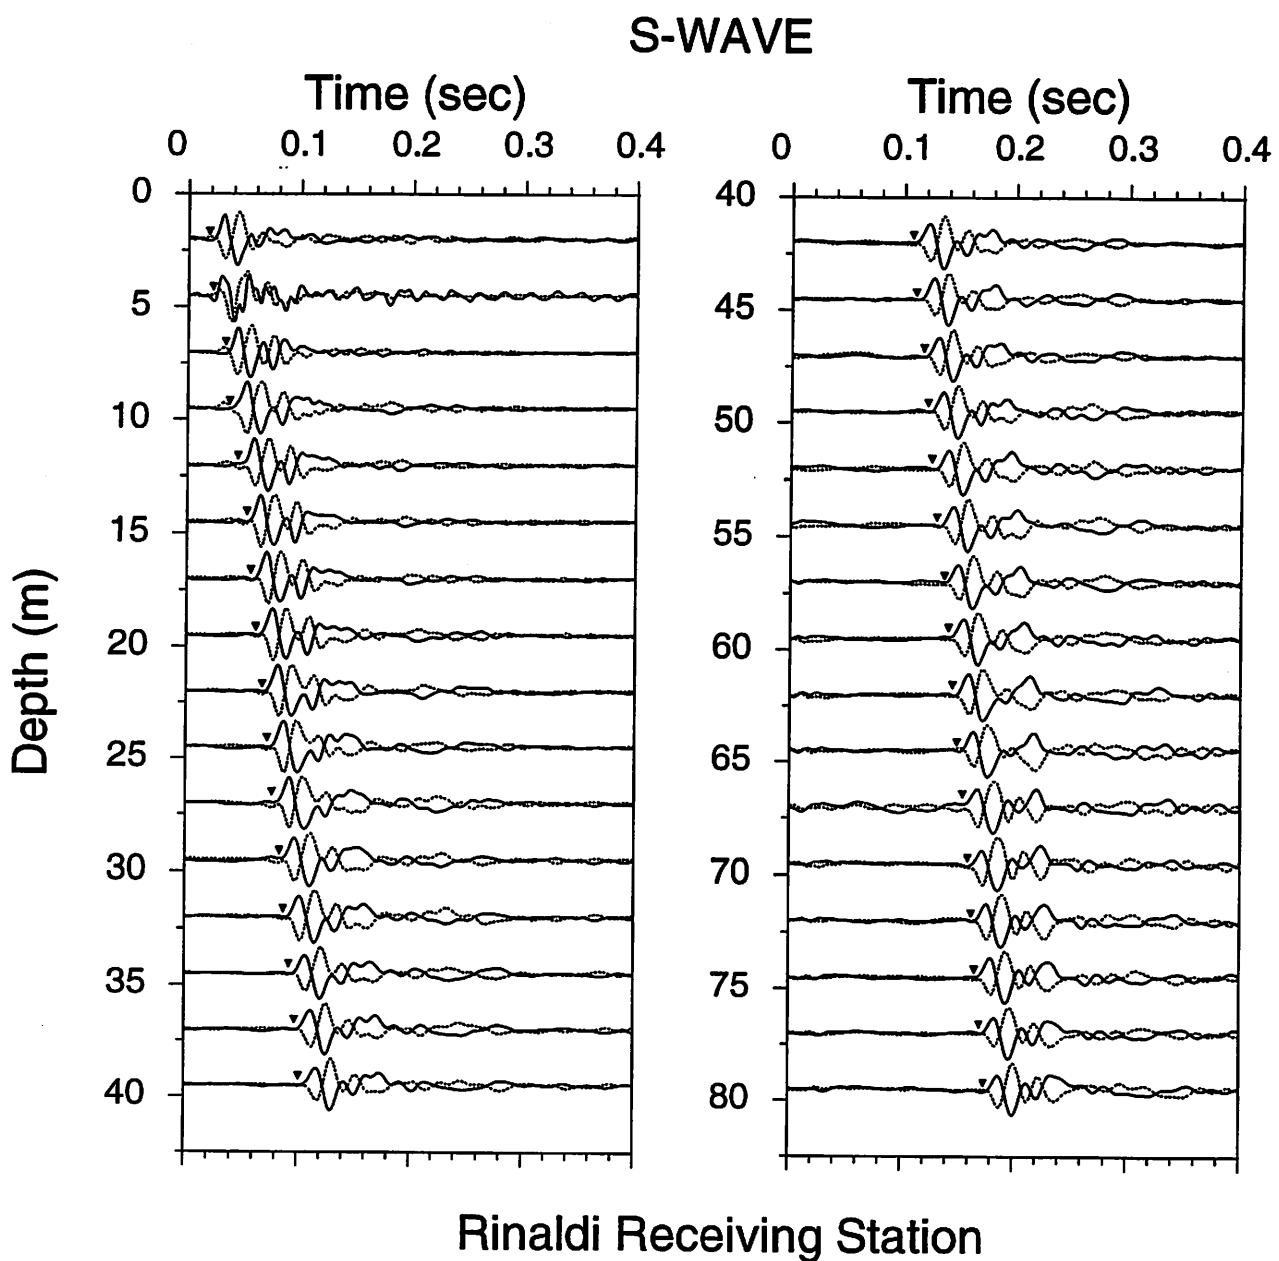


Figure A-32. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

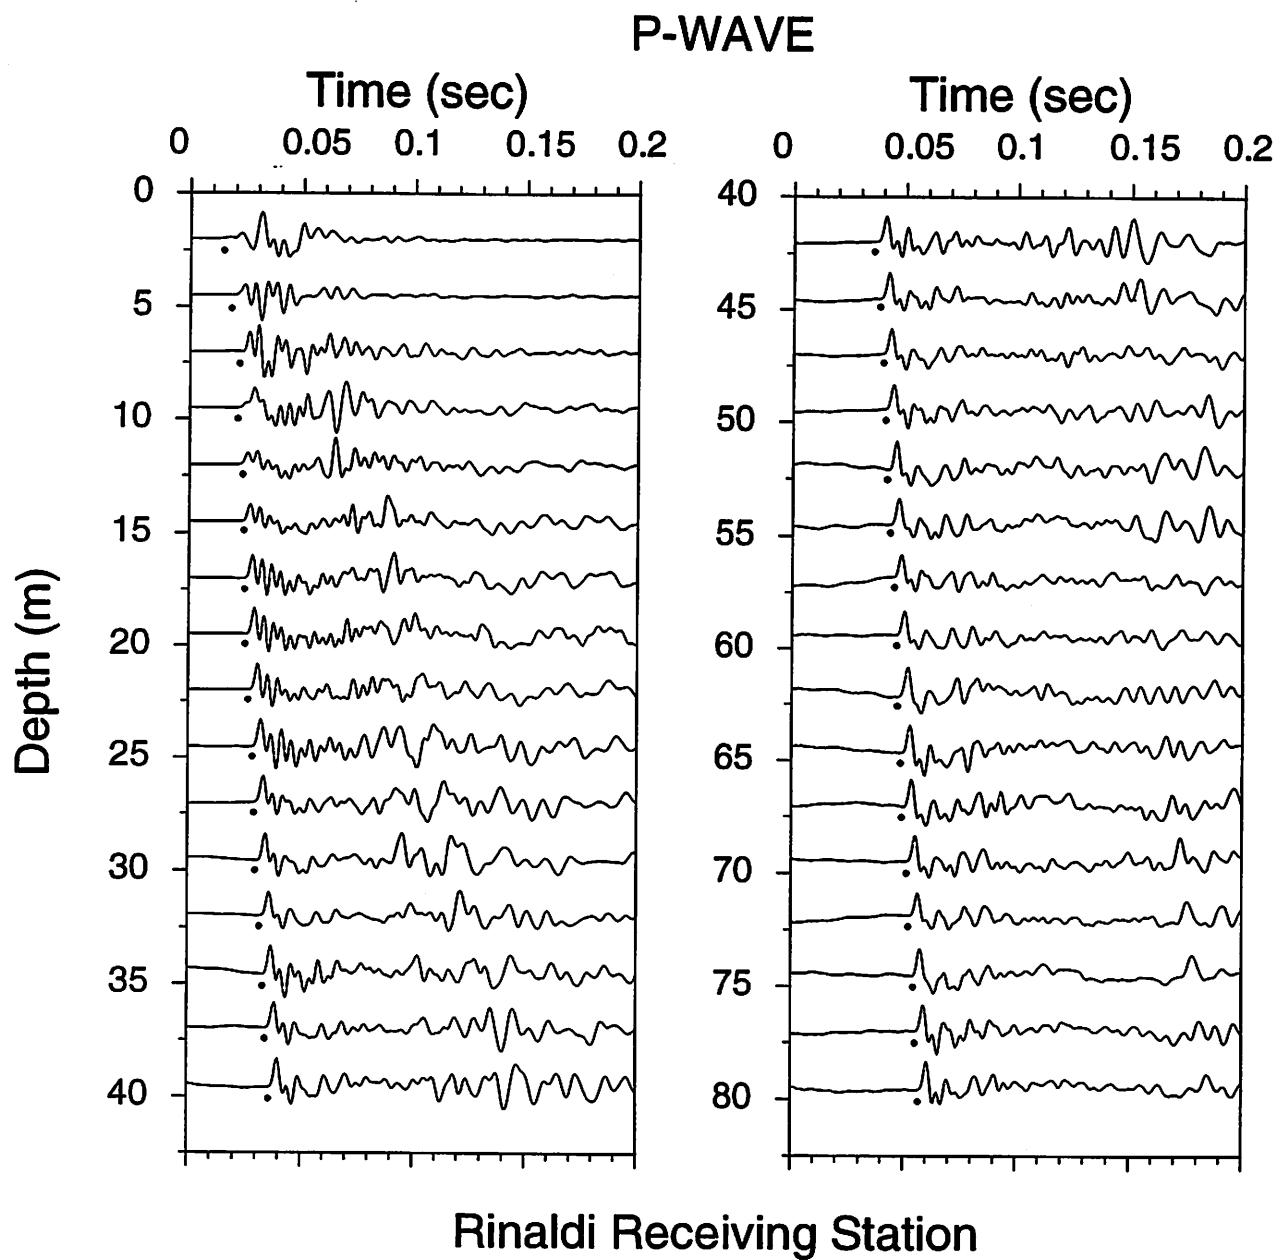


Figure A-33. Vertical component record section. P-wave arrivals are indicated by the solid circles.

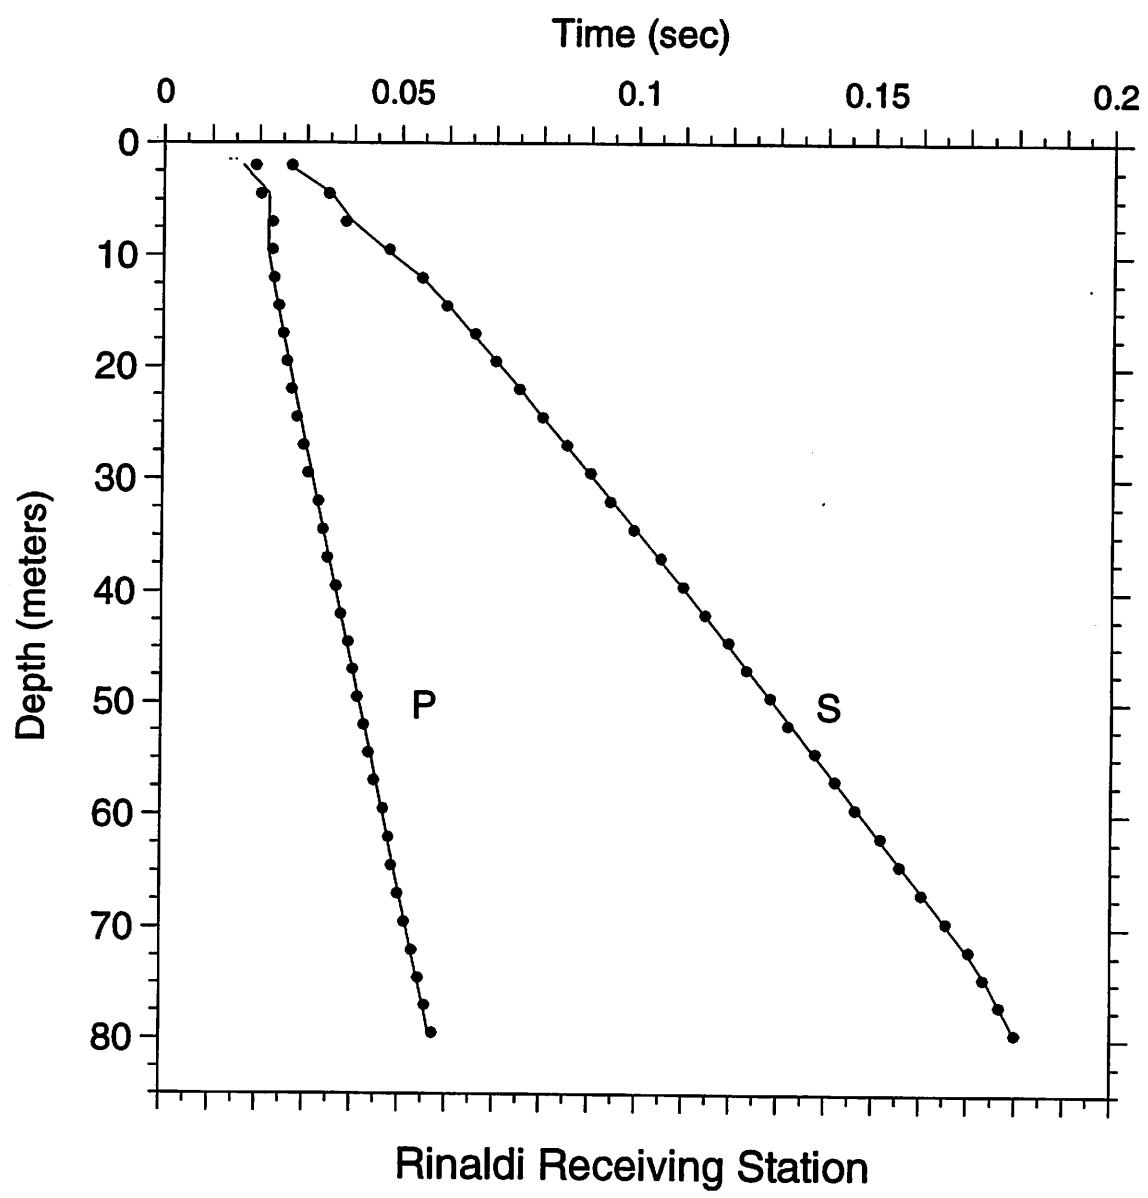


Figure A-34. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

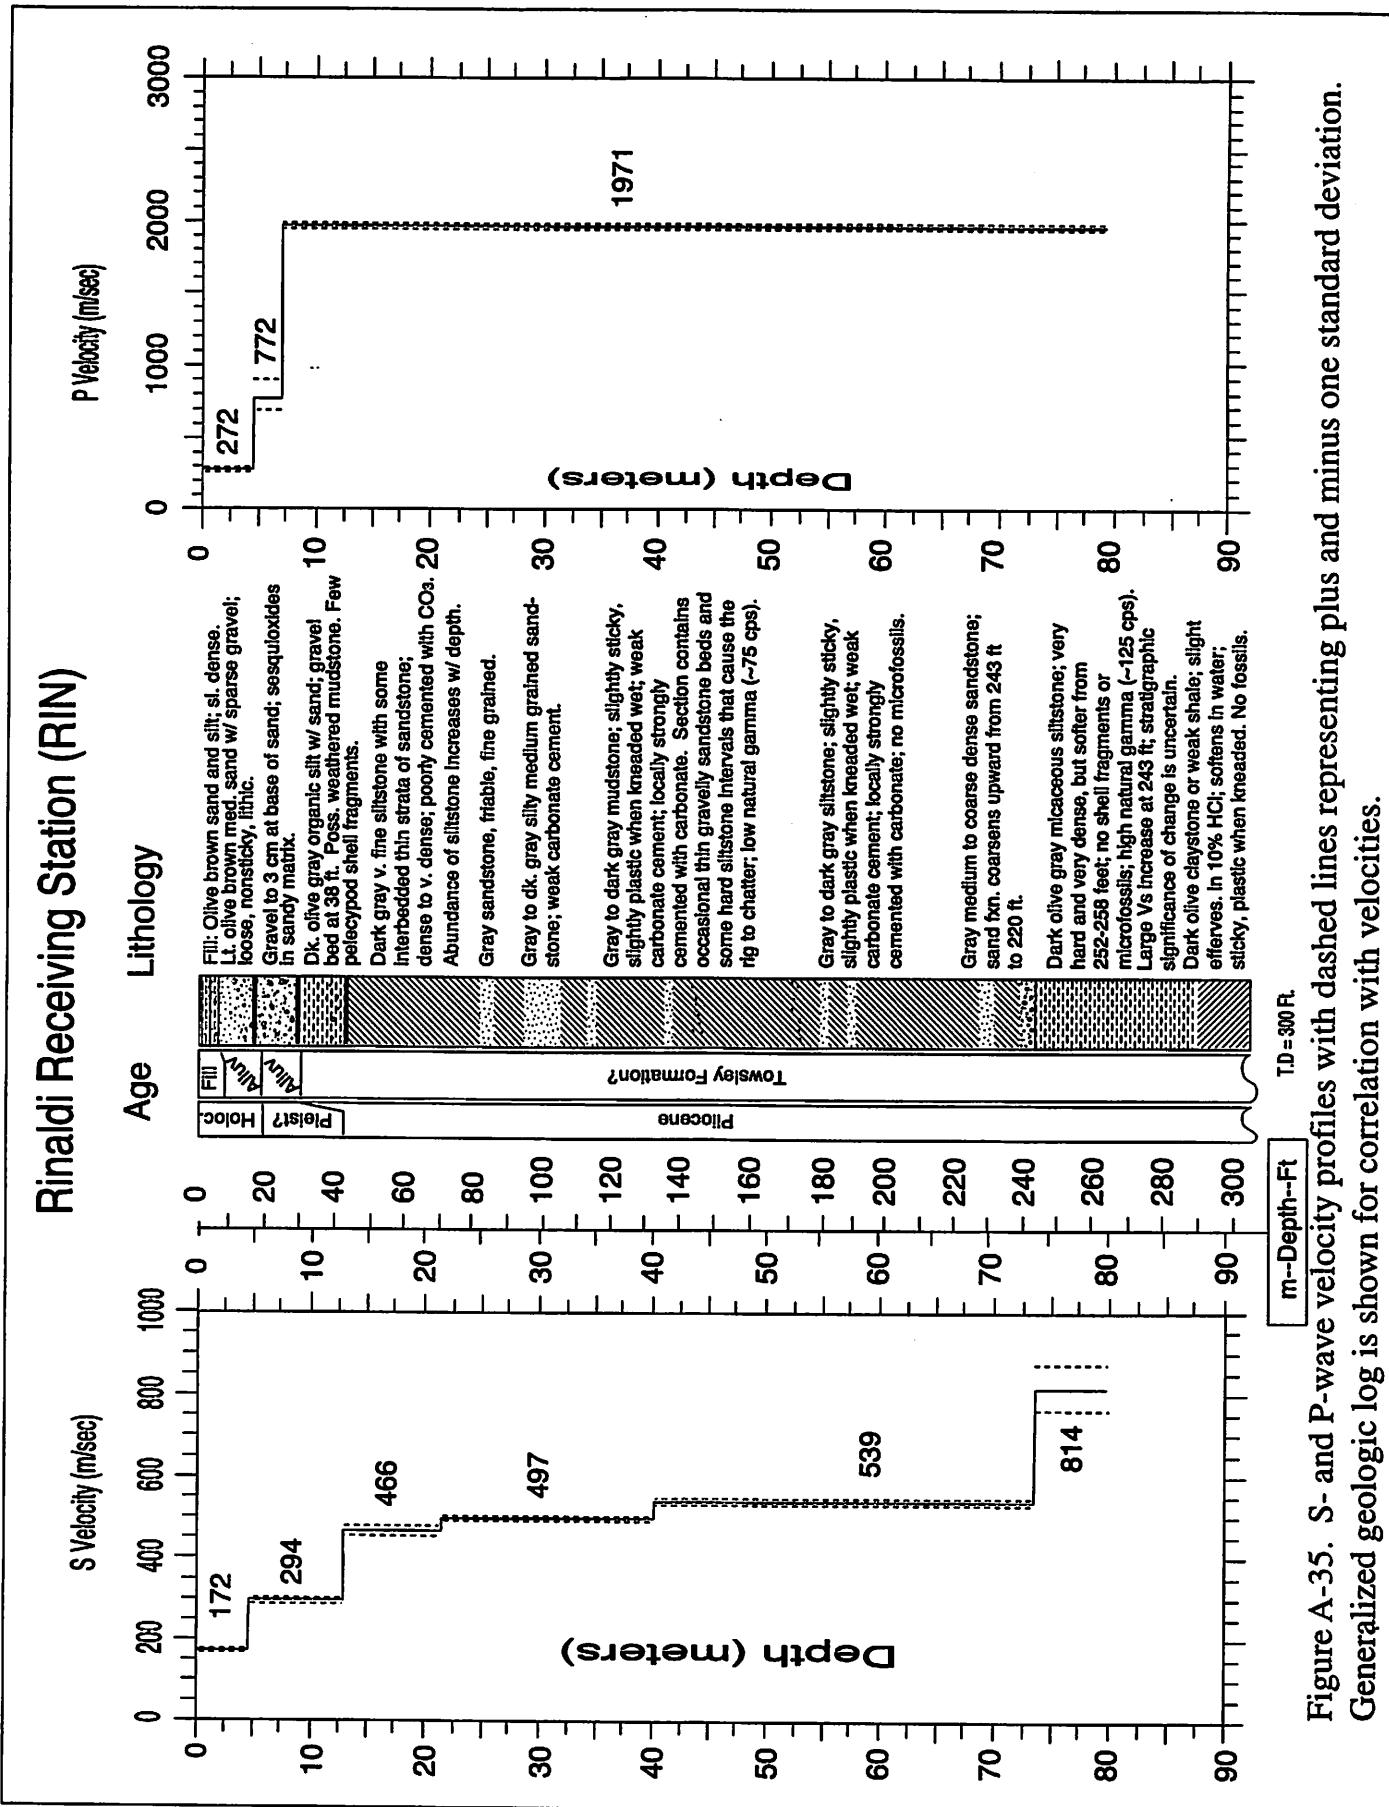


Figure A-35. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-13. S-Wave arrival times and velocity summaries.

Location:	Rinaldi	Receiving Station	Coordinates:	34.28100	118.47710	Hole_Code:	267
offset =	4.00	travel-time file: rins.ft		nlayers =	6		
d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	rsdl(sig)	dtb(m)	thk(m)	vl(m/s)
2.0	6.6	0.0268	0.0117	172	4.5	172	169
4.5	14.8	0.0346	0.0262	172	12.8	8.3	288
7.0	23.0	0.0382	0.0347	202	21.3	8.5	454
9.5	31.2	0.0474	0.0432	220	40.0	18.7	492
12.0	39.4	0.0544	0.0517	232	73.3	33.3	539
14.5	47.6	0.0596	0.0581	250	79.5	6.2	814
17.0	55.8	0.0656	0.0635	268	1	0.0004	763
19.5	64.0	0.0700	0.0688	283	1	0.0006	874
22.0	72.2	0.0750	0.0741	297	1	-0.0001	297
24.5	80.4	0.0800	0.0791	310	1	0.0000	310
27.0	88.6	0.0852	0.0842	321	1	0.0002	321
29.5	96.8	0.0902	0.0892	331	1	0.0003	331
32.0	105.0	0.0944	0.0932	340	1	-0.0005	340
34.5	113.2	0.0994	0.0993	348	1	-0.0014	348
37.0	121.4	0.1052	0.1043	355	1	0.0014	355
39.5	129.6	0.1100	0.1093	361	1	0.0012	361
42.0	137.8	0.1146	0.1141	368	1	0.0011	368
44.5	146.0	0.1196	0.1187	375	1	0.0015	375
47.0	154.2	0.1234	0.1233	381	1	-0.0003	381
49.5	162.4	0.1284	0.1280	387	1	0.0001	387
52.0	170.6	0.1322	0.1326	392	1	-0.0007	392
54.5	178.8	0.1380	0.1372	397	1	0.0004	397
57.0	187.0	0.1422	0.1419	402	1	0.0000	402
59.5	195.2	0.1464	0.1465	406	1	-0.0004	406
62.0	203.4	0.1518	0.1511	410	1	0.0004	410
64.5	211.6	0.1558	0.1558	414	1	-0.0002	414
67.0	219.8	0.1604	0.1604	418	1	-0.0003	418
69.5	228.0	0.1656	0.1650	421	1	0.0003	421
72.0	236.2	0.1704	0.1697	424	1	0.0005	424
74.5	244.4	0.1754	0.1736	429	1	-0.0004	429
77.0	252.6	0.1768	0.1766	436	1	0.0000	436
79.5	260.8	0.1800	0.1797	442	1	0.0001	442

Explanation:

dtb(m) = depth in meters
 d(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-Wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as $\text{avg_vel} = (\text{dm})/\text{tvrt(s)}$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 ctb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

TABLE A-14. P-wave arrival times and velocity summaries.


Location: Rinaldi Receiving Station Coordinates: 34.28100 118.47710 Hole_Code: 267
 offset = 4.00 travel-time file: rimp.tt

d(m)	d(ft)	ts(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vl(m/s)	vu(m/s)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.0	6.6	0.0192	0.0074	272	1	0.0027	4.5	272	265	279	14.8	892	869	916		
4.5	14.8	0.0204	0.0165	272	1	0.0017	7.0	2.5	772	674	23.0	8.2	2531	2212	2959	
7.0	23.0	0.0228	0.0198	354	1	0.0008	79.5	72.5	1971	1948	260.8	237.9	6466	6391	6544	
9.5	31.2	0.0228	0.0211	451	1	0.0009										
12.0	39.4	0.0232	0.0223	538	1	0.0003										
14.5	47.6	0.0242	0.0236	615	1	0.0002										
17.0	55.8	0.0252	0.0249	684	1	0.0000										
19.5	64.0	0.0260	0.0261	746	1	-0.0004										
22.0	72.2	0.0270	0.0274	803	1	-0.0006										
24.5	80.4	0.0282	0.0287	855	1	-0.0007										
27.0	88.6	0.0296	0.0299	902	1	-0.0005										
29.5	96.8	0.0306	0.0312	945	1	-0.0008										
32.0	105.0	0.0328	0.0325	985	1	0.0002										
34.5	113.2	0.0338	0.0337	1023	1	-0.0001										
37.0	121.4	0.0348	0.0350	1057	1	-0.0003										
39.5	129.6	0.0366	0.0363	1089	1	0.0002										
42.0	137.8	0.0376	0.0375	1119	1	-0.0001										
44.5	146.0	0.0392	0.0388	1147	1	0.0003										
47.0	154.2	0.0402	0.0401	1173	1	0.0000										
49.5	162.4	0.0412	0.0414	1197	1	-0.0002										
52.0	170.6	0.0426	0.0426	1220	1	-0.0001										
54.5	178.8	0.0436	0.0439	1242	1	-0.0004										
57.0	187.0	0.0448	0.0442	1262	1	-0.0004										
59.5	195.2	0.0468	0.0464	1282	1	0.0003										
62.0	203.4	0.0480	0.0477	1300	1	0.0002										
64.5	211.6	0.0486	0.0490	1317	1	-0.0004										
67.0	219.8	0.0500	0.0502	1334	1	-0.0003										
69.5	228.0	0.0514	0.0515	1350	1	-0.0002										
72.0	236.2	0.0530	0.0528	1364	1	0.0002										
74.5	244.4	0.0544	0.0540	1379	1	0.0003										
77.0	252.6	0.0558	0.0553	1392	1	0.0004										
79.5	260.8	0.0574	0.0566	1405	1	0.0008										

Explanation:
 d(m) = depth in meters
 d(ft) = depth in feet
 ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-Wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model, computed as avg_vrt = d(m)/tvrt(s)
 sigma, standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

VAN NUYS QUADRANGLE
CALIFORNIA—LOS ANGELES CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

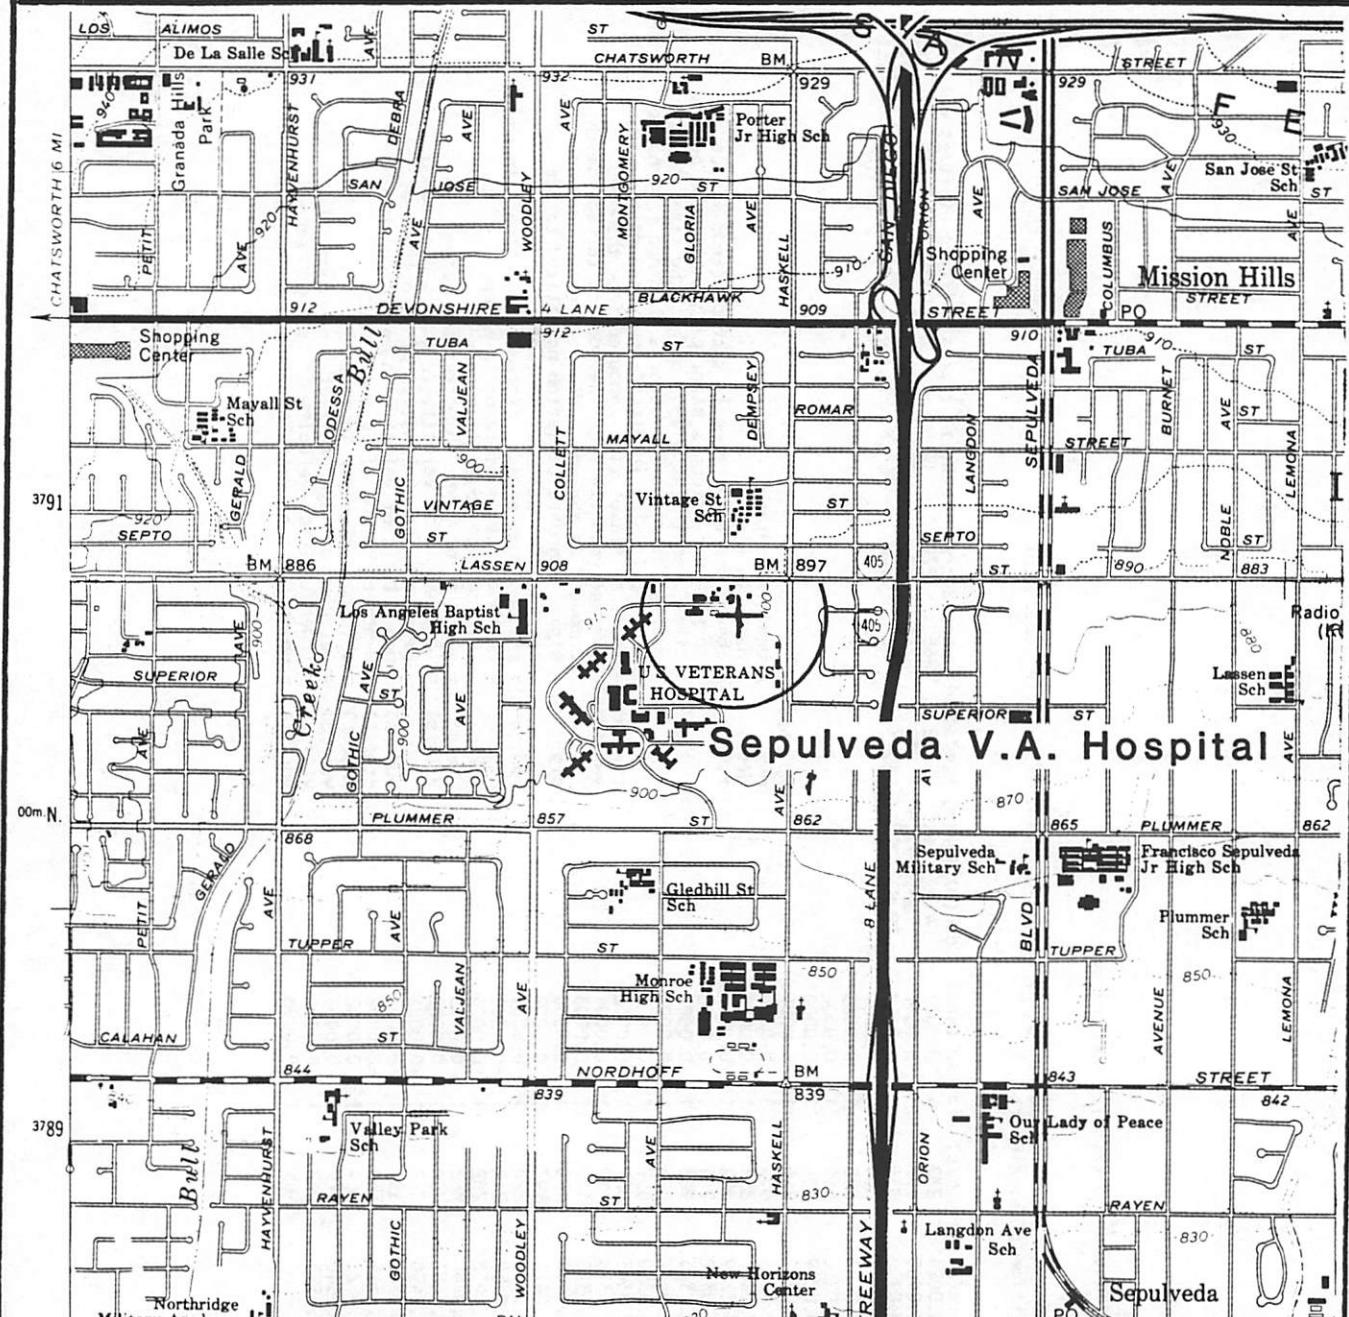

SCALE 1:24 000

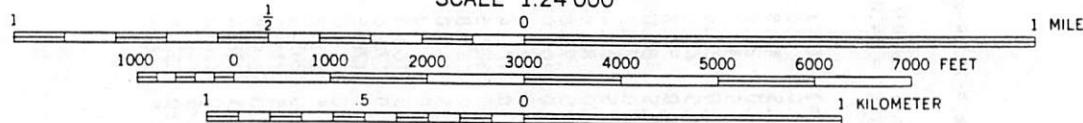


Figure A-36. Site location map for the borehole at Sepulveda V.A. Hospital. The accelerograph is located approximately 30 meters from the borehole.

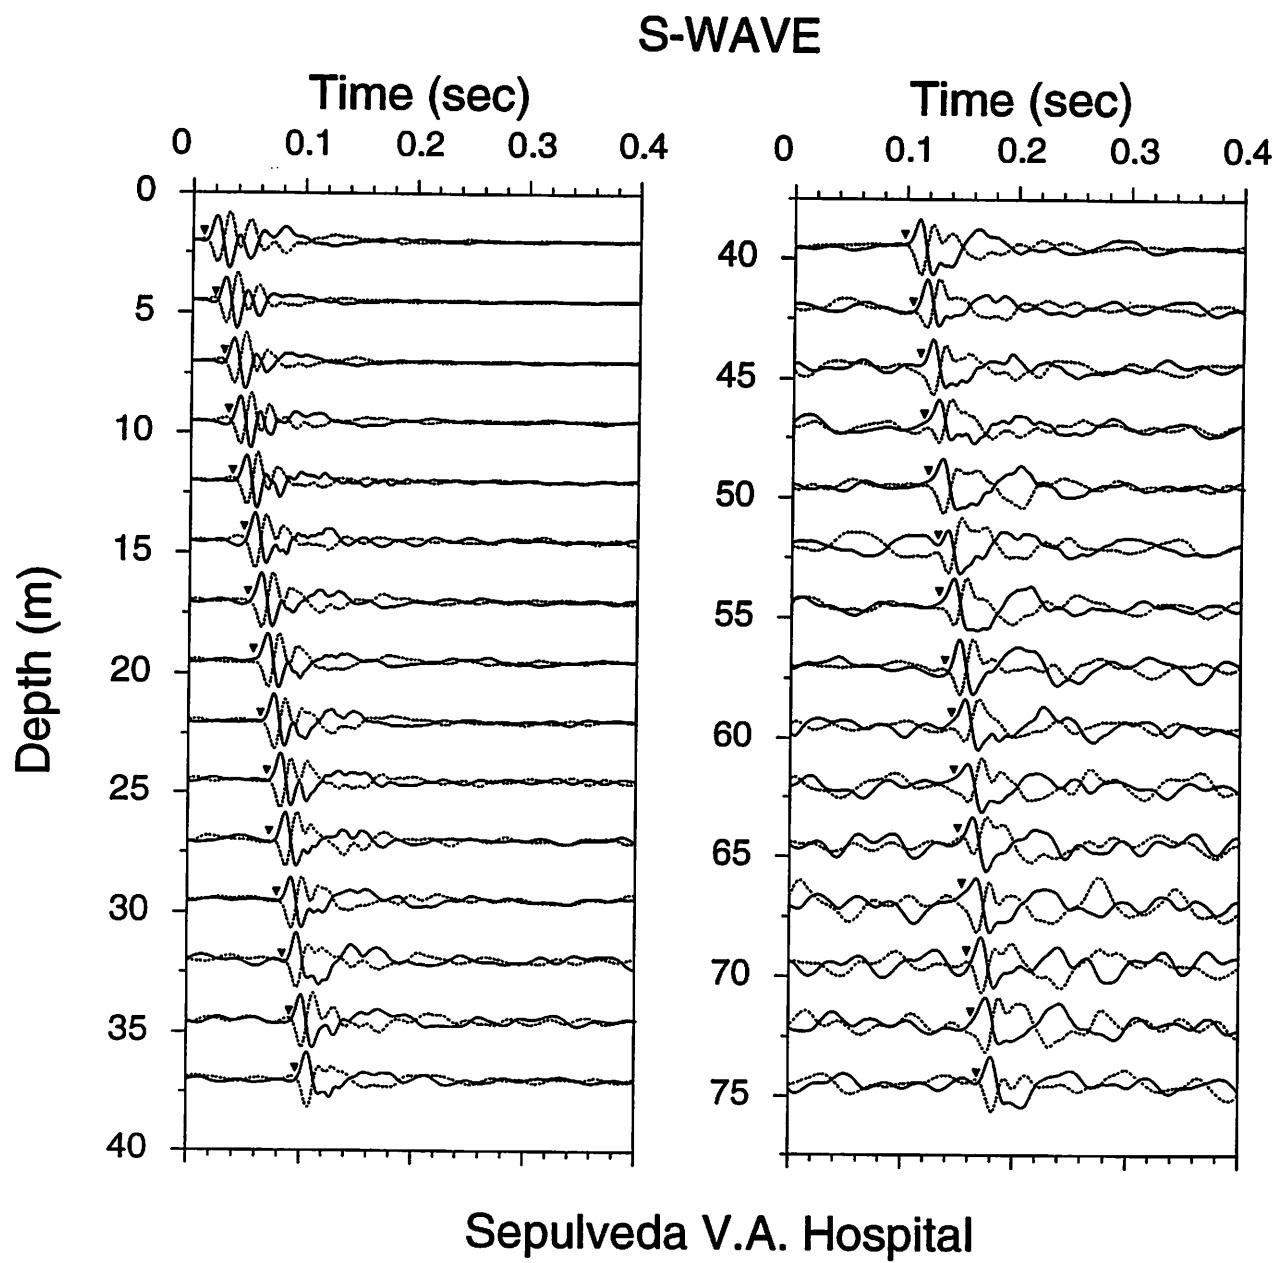


Figure A-37. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

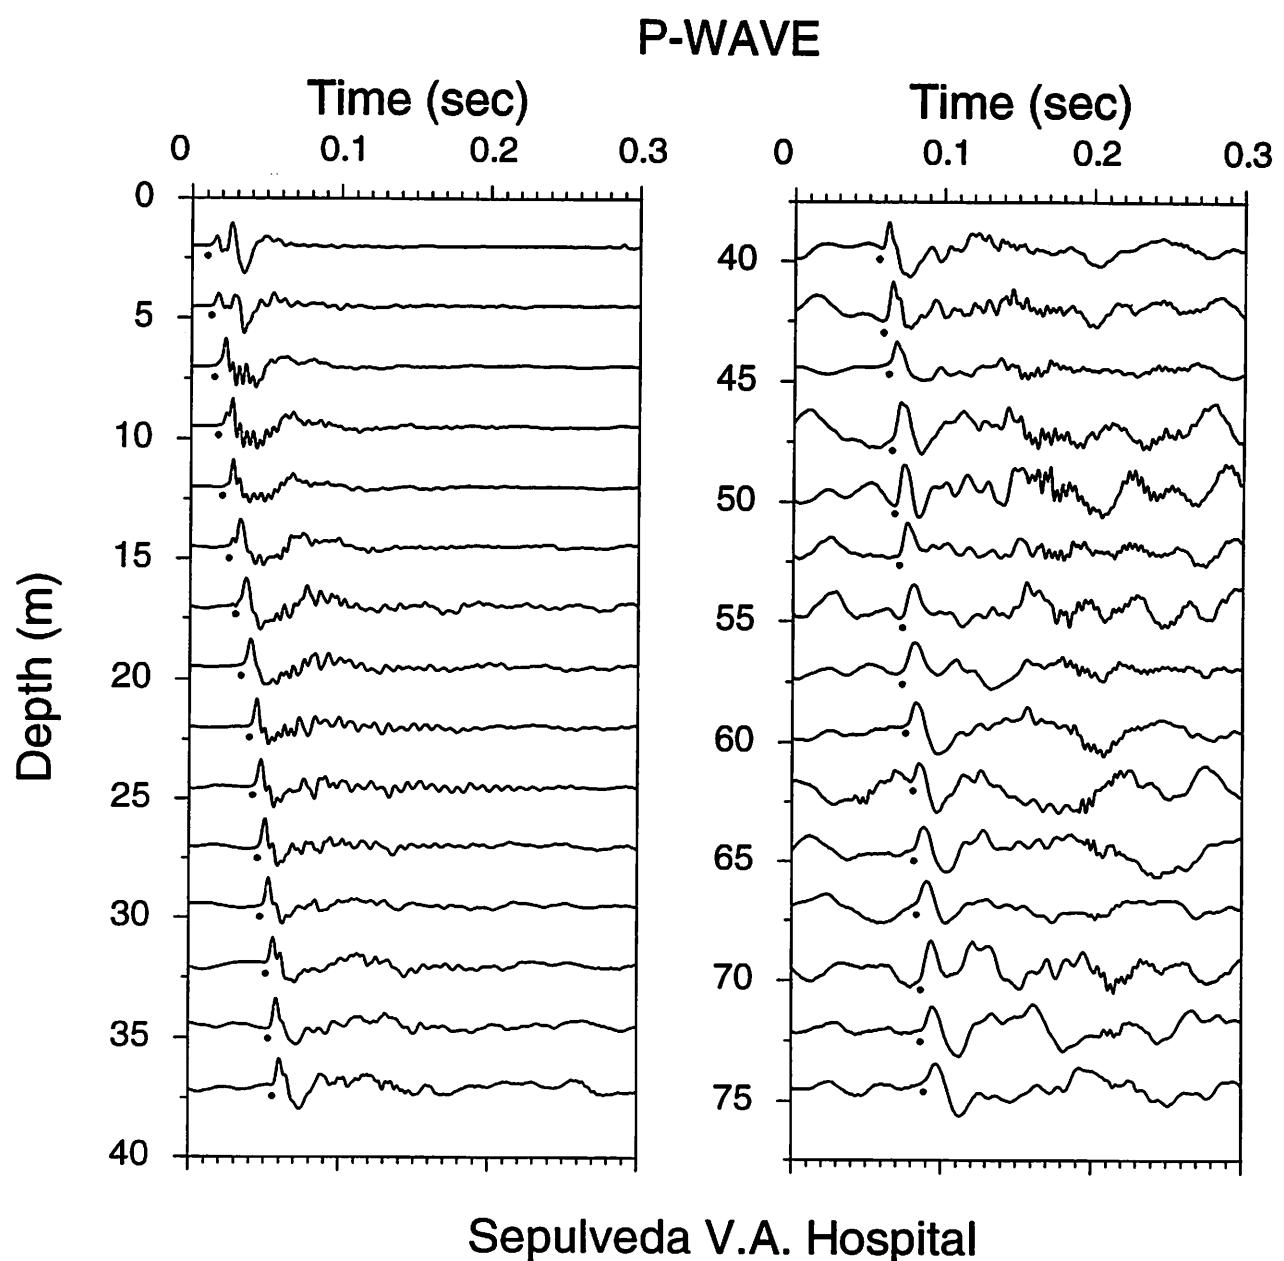


Figure A-38. Vertical component record section. P-wave arrivals are indicated by the solid circles.

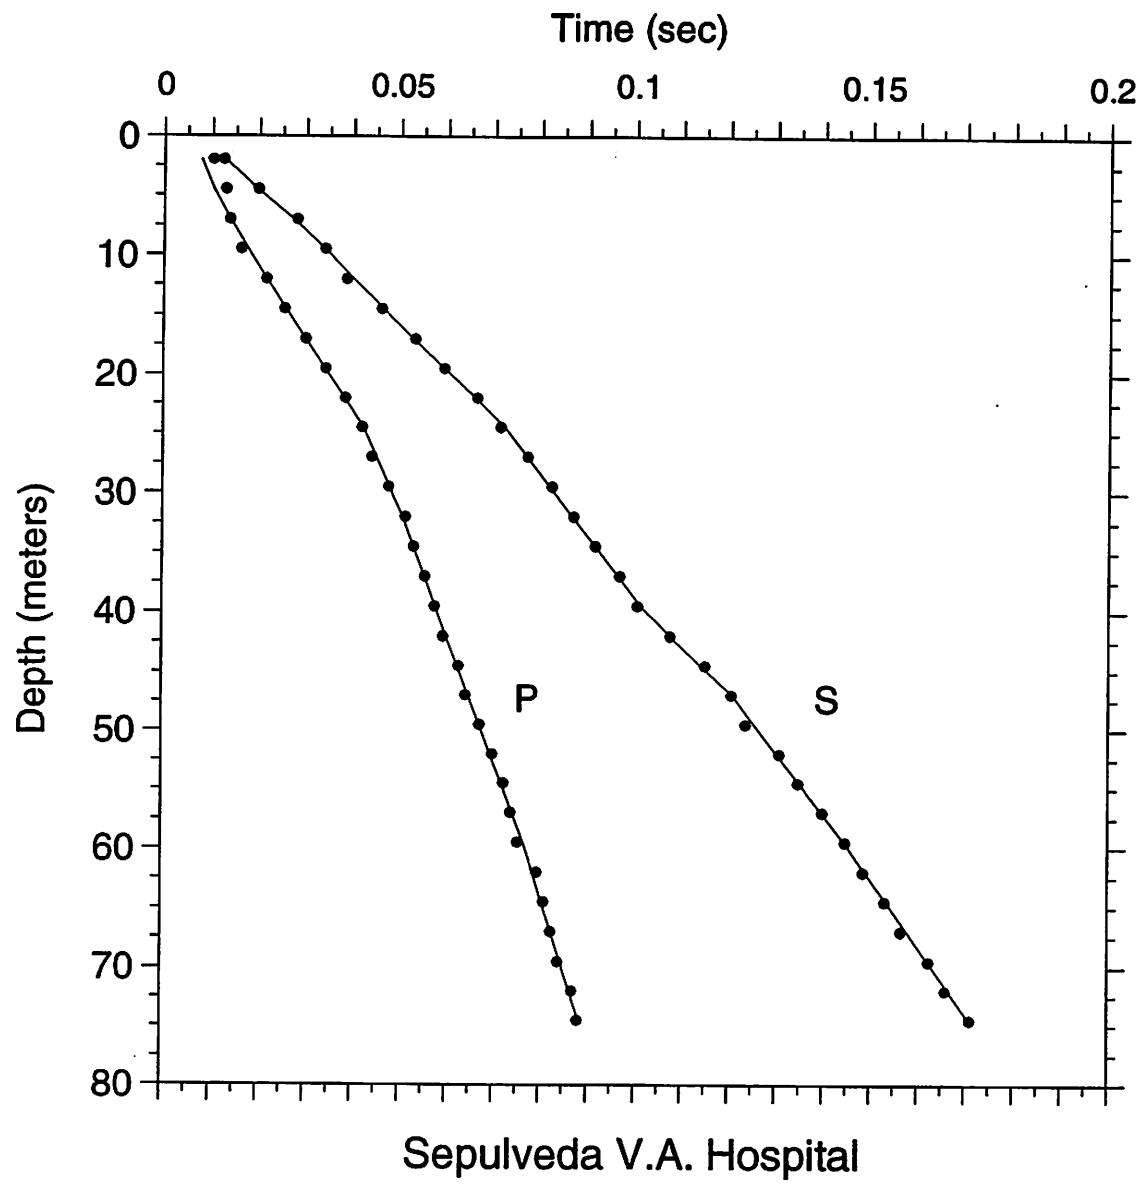


Figure A-39. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Sepulveda VA Hospital (SVA)

S-Wave Velocity (m/sec)

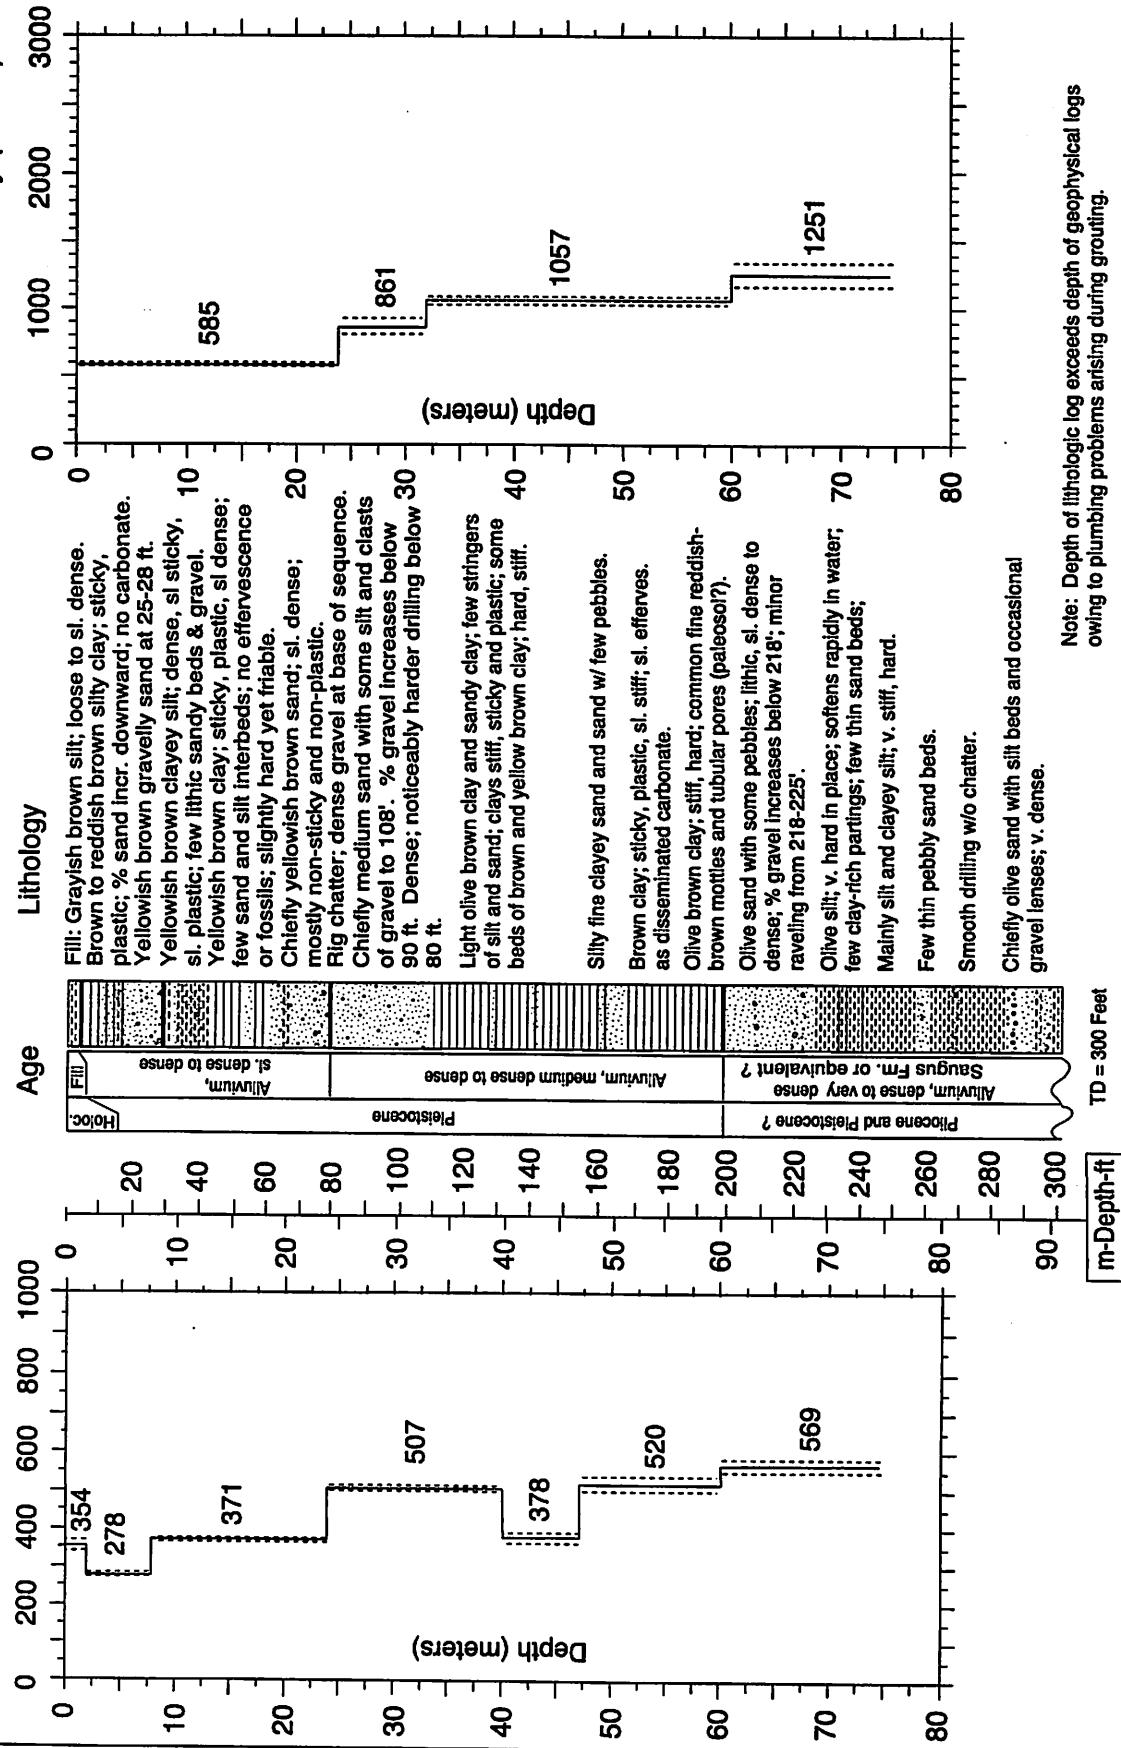


Figure A-40. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-15. S-wave arrival times and velocity summaries.

Location:	sepulveda	VA Hospital	Coordinates:	34.24900	118.47720	Hole_Code:	270
h_offset =	4.00	travel-time file:	svas.tt	nlayers = 7			
d(ft)	ts(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(ft)	thk(ft)
2.0	6.6	0.0124	0.0056	354	-0.0002	2.0	2.0
4.5	6.6	0.0198	0.0146	307	1	0.0003	8.0
7.0	14.8	0.0280	0.0216	296	1	0.0008	24.0
9.5	31.2	0.0340	0.0313	304	1	0.0001	40.0
12.0	39.4	0.0386	0.0380	316	1	-0.0014	47.0
14.5	47.6	0.0460	0.0447	324	1	-0.0004	60.0
17.0	55.8	0.0532	0.0515	330	1	0.0006	74.5
19.5	64.0	0.0594	0.0582	335	1	0.0004	72.0
22.0	72.2	0.0664	0.0649	339	1	0.0008	80.4
24.5	80.4	0.0714	0.0713	344	1	-0.0008	88.6
27.0	96.8	0.0824	0.0811	364	1	0.0002	29.5
32.0	105.0	0.0870	0.0861	372	1	0.0005	32.0
34.5	113.2	0.0916	0.0910	379	1	0.0003	34.5
37.0	121.4	0.0968	0.0959	386	1	0.0003	37.0
39.5	129.6	0.1006	0.1008	392	1	-0.0007	39.5
42.0	137.8	0.1076	0.1071	392	1	0.0000	42.0
44.5	146.0	0.1150	0.1137	391	2	0.0008	44.5
47.0	154.2	0.1206	0.1203	391	2	-0.0002	47.0
49.5	162.4	0.1236	0.1251	396	2	-0.0019	49.5
52.0	170.6	0.1308	0.1299	400	1	0.0005	52.0
54.5	178.8	0.1348	0.1348	404	2	-0.0003	54.5
57.0	187.0	0.1400	0.1396	408	1	0.0001	57.0
59.5	195.2	0.1448	0.1444	412	2	0.0012	59.5
62.0	203.4	0.1486	0.1488	417	3	-0.0005	62.0
64.5	211.6	0.1532	0.1532	421	2	-0.0003	64.5
67.0	219.8	0.1566	0.1576	425	3	-0.0013	67.0
69.5	228.0	0.1624	0.1620	429	1	0.0011	69.5
72.0	236.2	0.1660	0.1664	433	2	-0.0007	72.0
74.5	244.4	0.1712	0.1708	436	1	0.0002	74.5

Explanation:
 d(m) = depth in meters
 dtb(ft) = depth in feet
 ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.

tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as avg vel = $d(m)/tvrt(s)$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vL(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity of layer in feet per second
 vL(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

TABLE A-16. P-wave arrival times and velocity summaries.

Location:	Sepulveda VA Hospital	Coordinates:	34.24900	118.47720	Hole_Code:	270
hoffset =	4.00	travel-time file:	svap.tt	nlayers =	4	
d(m)	d(ft)	ts(s)	tvrt(s)	vavg(m/s)	rsdl(sec)	dtb(m)
2.0	6.6	0.0102	0.0034	585	0.0025	24.0
4.5	14.8	0.0129	0.0077	585	1	32.0
7.0	23.0	0.0138	0.0120	585	1	60.0
9.5	31.2	0.0162	0.0162	585	1	60.5
12.0	39.4	0.0216	0.0205	585	1	14.5
14.5	47.6	0.0255	0.0248	585	1	14.5
17.0	55.8	0.0300	0.0291	585	1	17.0
19.5	64.0	0.0342	0.0333	585	1	19.5
22.0	72.2	0.0384	0.0376	585	1	22.0
24.5	80.4	0.0420	0.0416	589	1	24.5
27.0	88.6	0.0441	0.0445	606	1	27.0
29.5	96.8	0.0477	0.0474	622	1	29.5
32.0	105.0	0.0513	0.0503	636	1	32.0
34.5	113.2	0.0531	0.0527	655	1	34.5
37.0	121.4	0.0555	0.0551	672	1	37.0
39.5	129.6	0.0576	0.0574	688	1	39.5
42.0	137.8	0.0594	0.0598	703	1	42.0
44.5	146.0	0.0627	0.0621	716	1	44.5
47.0	154.2	0.0642	0.0645	729	1	47.0
49.5	162.4	0.0672	0.0669	740	1	49.5
52.0	170.6	0.0699	0.0692	751	1	52.0
54.5	178.8	0.0723	0.0716	761	1	54.5
57.0	187.0	0.0758	0.0740	771	1	57.0
59.5	195.2	0.0753	0.0763	779	1	59.5
62.0	203.4	0.0795	0.0784	791	1	62.0
64.5	211.6	0.0810	0.0804	802	1	64.5
67.0	219.8	0.0825	0.0824	813	1	67.0
69.5	228.0	0.0840	0.0844	823	1	69.5
72.0	236.2	0.0870	0.0864	833	1	72.0
74.5	244.4	0.0882	0.0884	843	1	74.5

Explanation:
 dt(m) = depth in meters
 df(ft) = depth in feet
 ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-Wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as avg_vel = d(m)/tvrt(s)
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 db(fit) = depth to bottom of layer in feet
 tk(ft) = thickness of layer in feet
 vt(fit) = velocity of layer in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

VAN NUYS QUADRANGLE
CALIFORNIA—LOS ANGELES CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

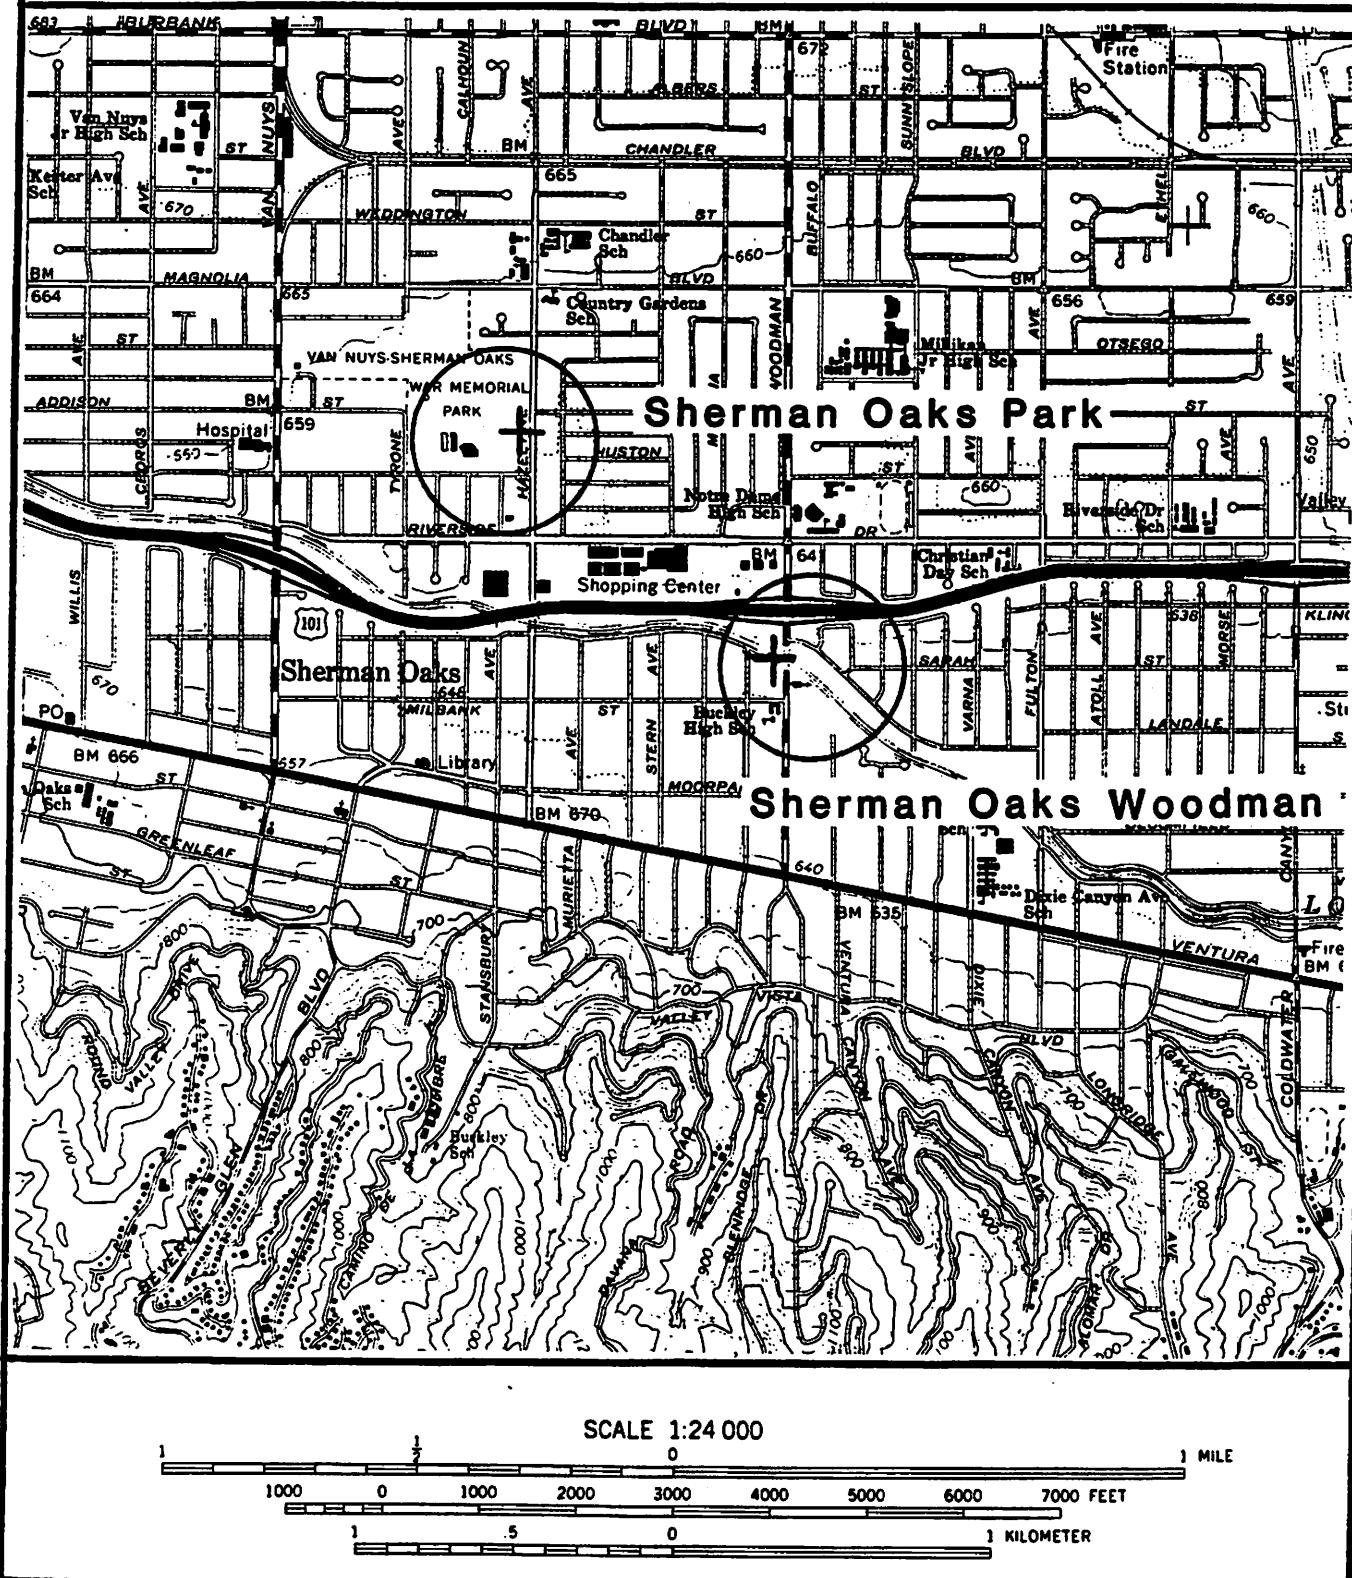


Figure A-41. Site location map for the borehole at Sherman Oaks Park. No accelerograph is located at this site.

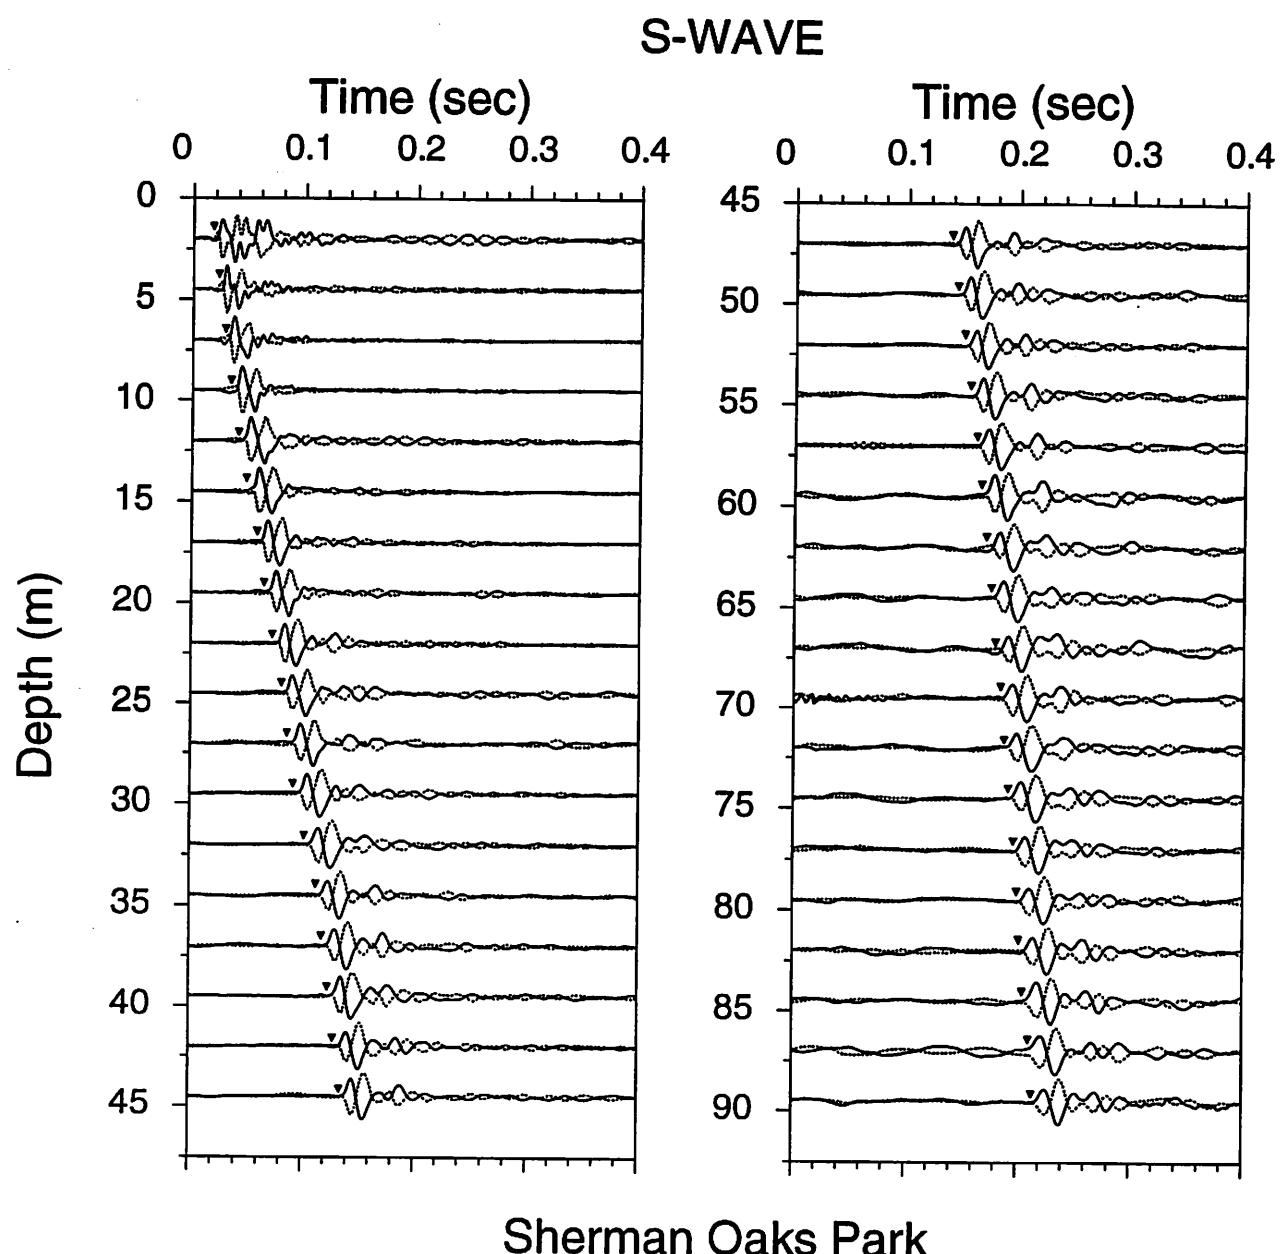


Figure A-42. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

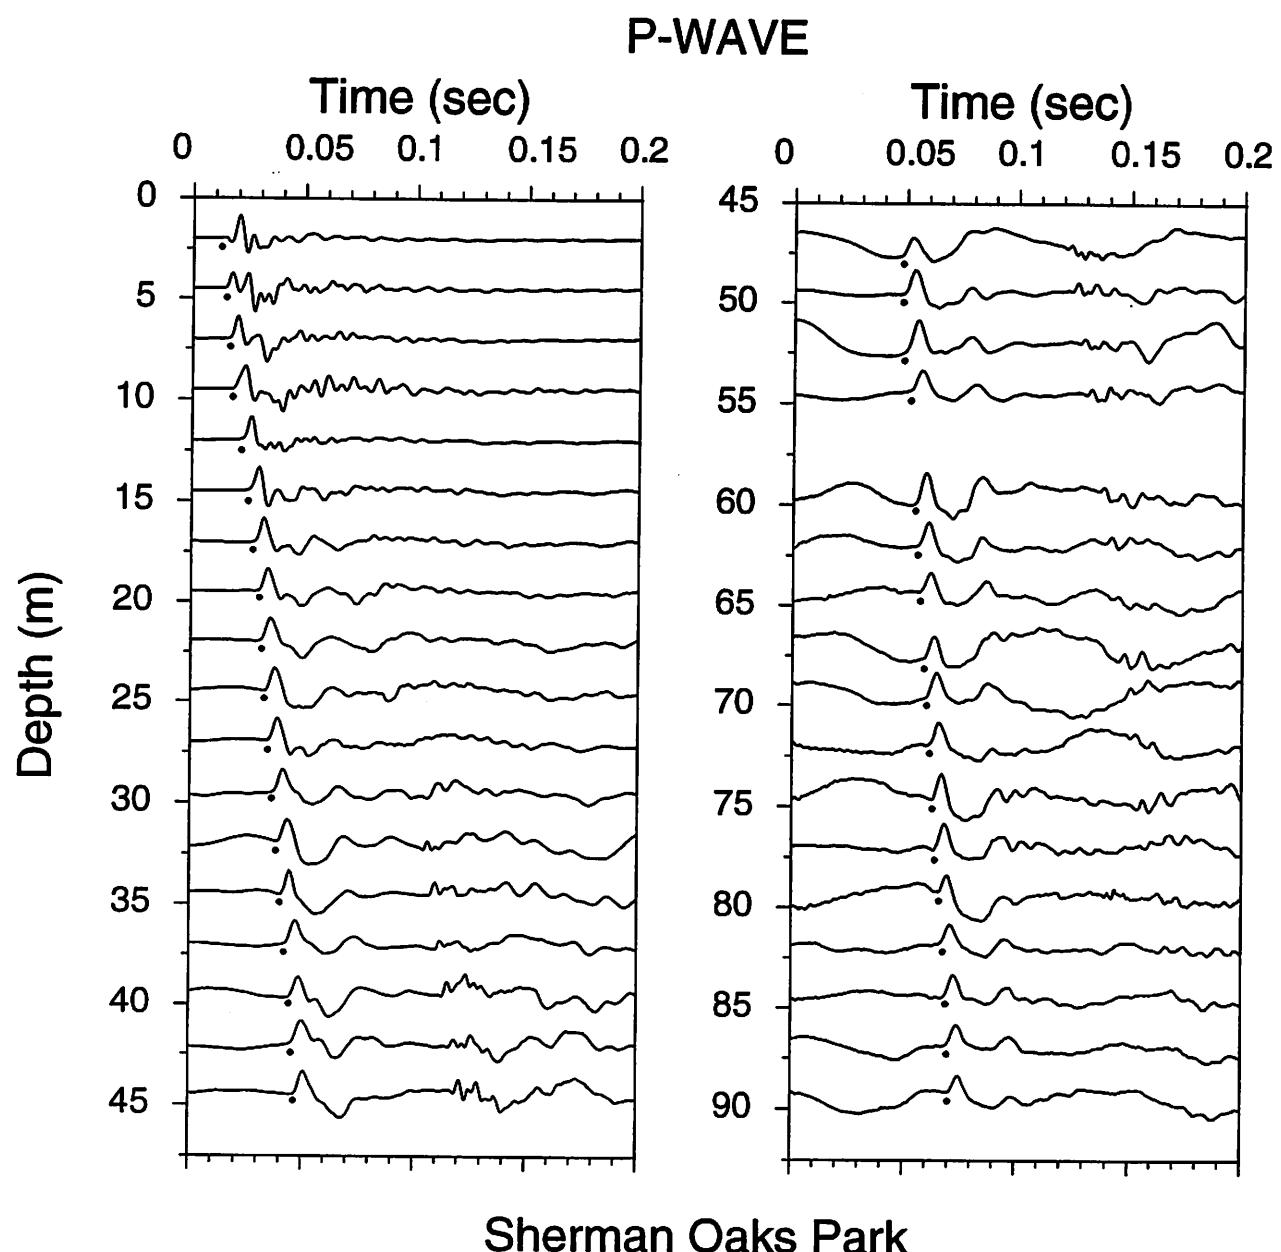


Figure A-43. Vertical component record section. P-wave arrivals are indicated by the solid circles.

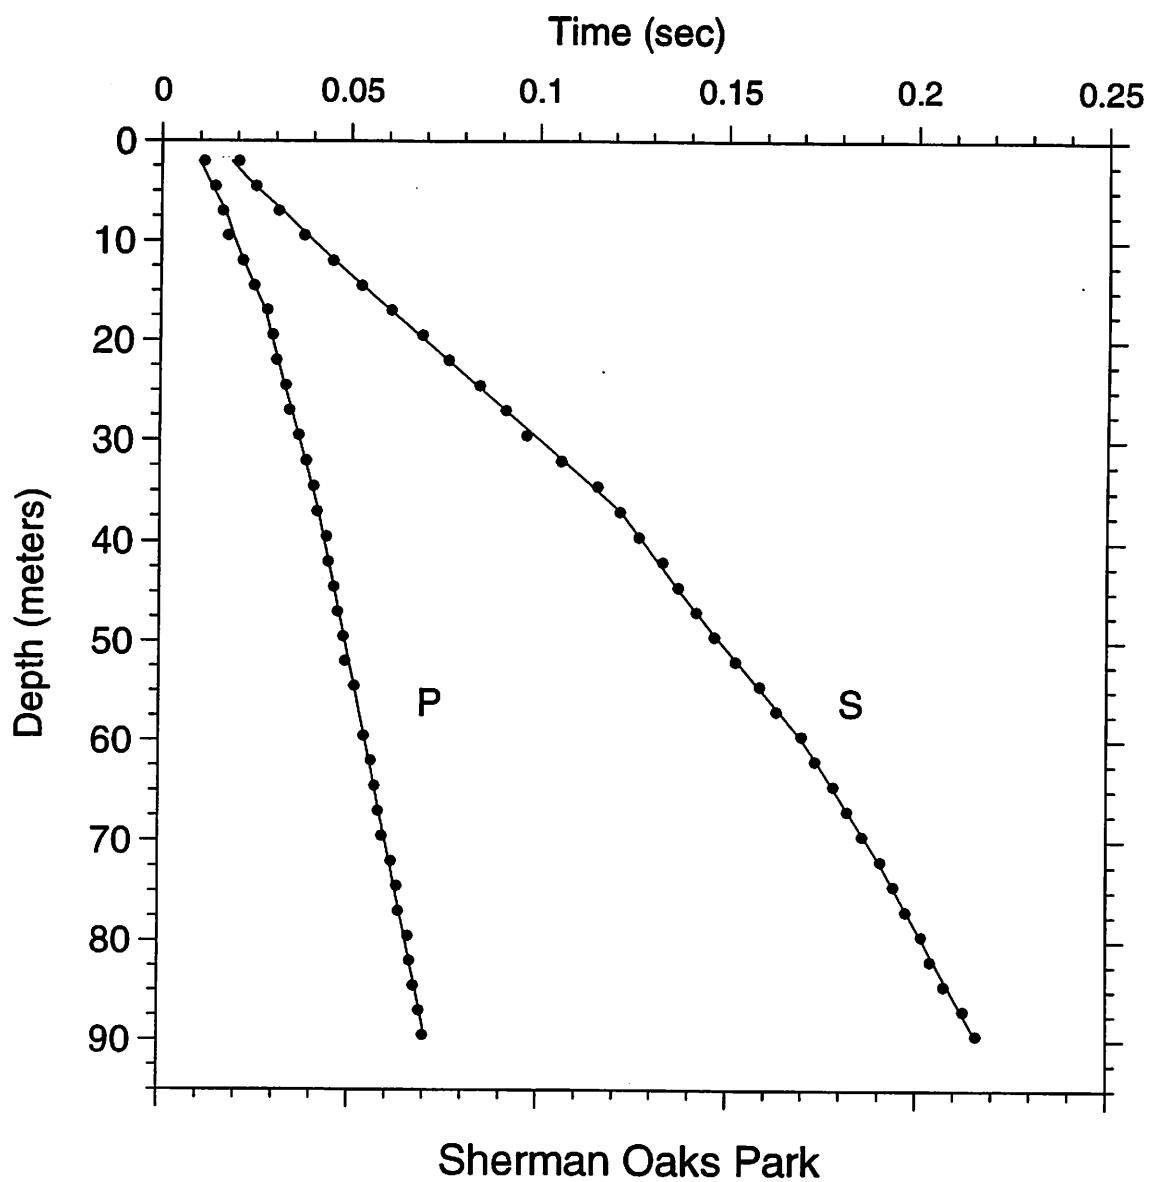


Figure A-44. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Sherman Oaks Park (SOP)

S Velocity (m/sec)

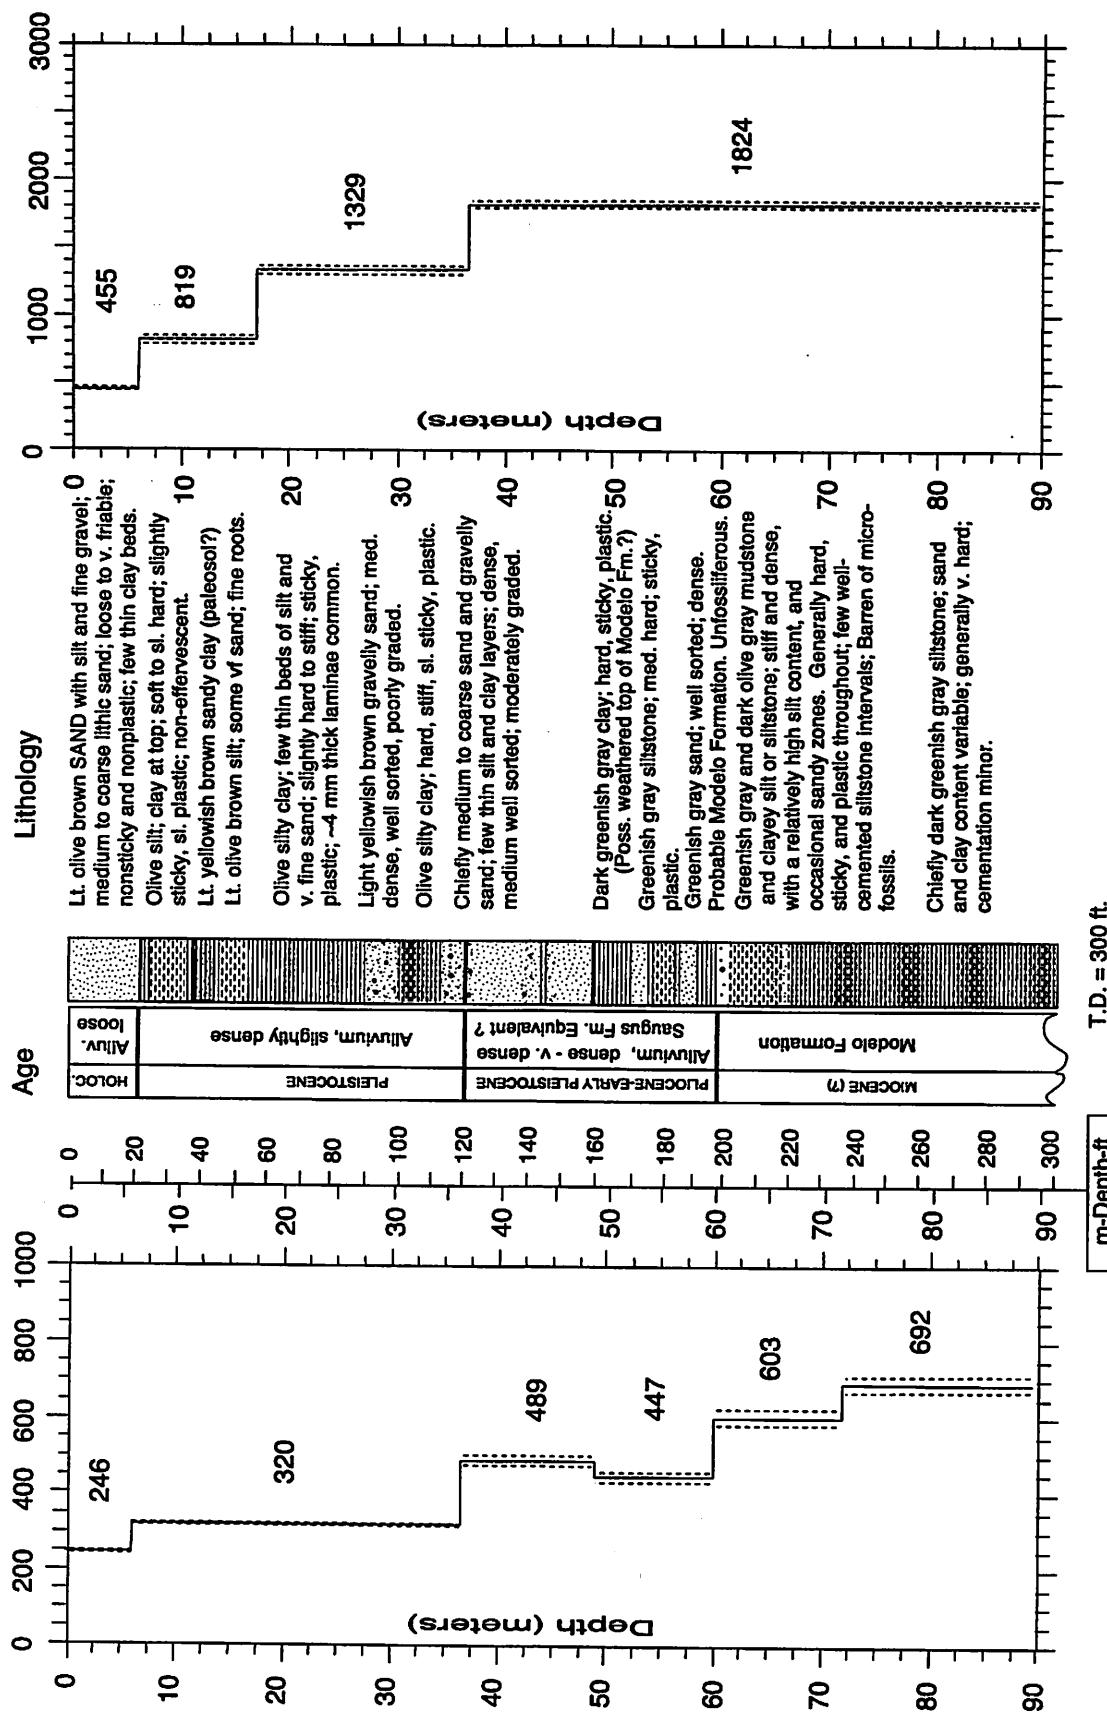


Figure A-45. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-17. S-wave arrival times and velocity summaries.

Location:	Sherman Oaks Park	Coordinates:	34.16070	118.43940	Hole_Code:	269
offset =	2.00	travel-time file:	sops.tt		layers =	6
d(ft)	ts(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	
2.0	6.6	0.0202	0.0081	246	1	0.0003
4.5	14.8	0.0248	0.0183	246	1	0.0003
7.0	23.0	0.0308	0.0276	253	1	-0.0010
9.5	31.2	0.0376	0.0355	268	1	-0.0008
12.0	39.4	0.0452	0.0433	277	1	-0.0004
14.5	47.6	0.0528	0.0511	284	1	-0.0002
17.0	55.8	0.0608	0.0589	288	1	0.0003
19.5	64.0	0.0690	0.0668	292	1	0.0009
22.0	72.2	0.0760	0.0746	295	1	0.0002
24.5	80.4	0.0842	0.0824	297	1	0.0007
27.0	88.6	0.0912	0.0902	299	1	0.0000
29.5	96.8	0.0968	0.0980	301	1	-0.0021
32.0	105.0	0.1060	0.1059	302	1	-0.0007
34.5	113.2	0.1156	0.1137	303	1	0.0012
37.0	121.4	0.1216	0.1211	306	1	-0.0002
39.5	129.6	0.1266	0.1262	313	1	-0.0002
42.0	137.8	0.1330	0.1313	320	1	0.0011
44.5	146.0	0.1372	0.1364	326	1	0.0003
47.0	156.2	0.1420	0.1415	332	1	0.0000
49.5	164.4	0.1468	0.1467	337	1	-0.0004
52.0	170.6	0.1524	0.1523	341	1	-0.0004
54.5	178.8	0.1588	0.1579	345	1	0.0005
57.0	187.0	0.1632	0.1635	349	1	-0.0007
59.5	195.2	0.1700	0.1691	352	1	0.0005
62.0	203.4	0.1736	0.1735	357	1	-0.0003
64.5	211.6	0.1784	0.1777	363	1	0.0004
67.0	219.8	0.1820	0.1818	368	1	-0.0001
69.5	228.0	0.1860	0.1860	374	1	-0.0003
72.0	236.2	0.1908	0.1901	379	1	0.0004
74.5	244.4	0.1942	0.1937	385	1	0.0002
77.0	252.6	0.1974	0.1974	390	1	-0.0002
79.5	260.8	0.2016	0.2010	396	1	0.0004
82.0	269.0	0.2040	0.2046	401	1	-0.0008
84.5	277.2	0.2076	0.2082	406	1	-0.0008
87.0	285.4	0.2126	0.2118	411	1	0.0006
89.5	293.6	0.2160	0.2154	415	1	0.0004

Explanation:

- d(m) = depth in meters
- d(ft) = depth in feet
- ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
- tvrt(s) = vertical travel time computed from the model
- vavg(m/s) = average velocity from the surface to each depth, computed as avg_vel = d(m)/tvrt(s)
- sig = sigma, standard deviation normalized to the standard deviation of best picks
- rsdl(sec) = residual (observed - fitted travel time), in secs
- ctb(m) = depth to bottom in meters
- ctb(ft) = thickness of layer in meters
- thk(m) = velocity in meters per second
- thk(ft) = thickness of layer in feet
- vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
- vl(ft/s) = upper limit of velocity in meters per second
- vu(m/s) = upper limit of velocity in meters per second
- ctb(ft) = depth to bottom of layer in feet
- thk(ft) = thickness of layer in feet
- vf(s) = velocity in feet per second
- vl(ft/s) = lower limit of velocity in feet per second
- vu(ft/s) = upper limit of velocity in feet per second

TABLE A-18. P-wave arrival times and velocity summaries.

Location: Sherman Oaks Park offset = 4.00		Coordinates: 34.16070 118.43940		Hole_Code: 269
		n layers = 4		
d(m)	d(ft)	ts(s)	tvrt(s)	vavg(m/s) sig rsdl(sec)
2.0	6.6	0.0110	0.0044	455 6.1 0.0012
4.5	14.8	0.0140	0.0099	455 6.1 0.0008
7.0	23.0	0.0160	0.0145	482 10.9 0.0006
9.5	31.2	0.0175	0.0175	541 19.6 0.0014
12.0	39.4	0.0215	0.0206	582 1 0.0001
14.5	47.6	0.0245	0.0237	613 1 0.0000
17.0	55.8	0.0280	0.0267	636 1 0.0000
19.5	64.0	0.0295	0.0286	682 1 0.0006
22.0	72.2	0.0305	0.0305	722 1 0.0004
24.5	80.4	0.0330	0.0324	757 1 0.0003
27.0	88.6	0.0340	0.0342	788 1 0.0006
29.5	96.8	0.0365	0.0361	817 1 0.0001
32.0	105.0	0.0385	0.0380	842 1 0.0002
34.5	113.2	0.0405	0.0399	865 1 0.0004
37.0	121.4	0.0415	0.0417	888 1 0.0004
39.5	129.6	0.0440	0.0431	917 1 0.0008
42.0	137.8	0.0445	0.0444	945 1 0.0001
44.5	146.0	0.0460	0.0458	972 1 0.0000
47.0	154.2	0.0470	0.0472	996 1 0.0003
49.5	162.4	0.0485	0.0485	1020 1 0.0002
52.0	170.6	0.0490	0.0499	1042 1 0.0010
54.5	178.8	0.0515	0.0513	1063 1 0.0001
59.5	195.2	0.0540	0.0540	1101 1 0.0001
62.0	203.4	0.0560	0.0554	1119 1 0.0005
64.5	211.6	0.0570	0.0568	1136 1 0.0001
67.0	219.8	0.0580	0.0581	1152 1 0.0002
69.5	228.0	0.0590	0.0595	1168 1 0.0006
72.0	236.2	0.0615	0.0609	1183 1 0.0005
74.5	244.4	0.0630	0.0622	1197 1 0.0007
77.0	252.6	0.0635	0.0636	1210 1 0.0002
79.5	260.8	0.0660	0.0650	1223 1 0.0009
82.0	269.0	0.0665	0.0664	1236 1 0.0001
84.5	277.2	0.0675	0.0677	1248 1 0.0003
87.0	285.4	0.0690	0.0691	1259 1 0.0002
89.5	293.6	0.0700	0.0705	1270 1 0.0005

Explanation:
d(m) = depth in meters
d(ft) = depth in feet
tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer-blows differing in direction by 180 degrees.
tvrt(s) = vertical travel time computed from the model vavg(m/s) = average velocity from the surface to each depth, computed as avg_vel = d(m)/tvrt(s)
sig = sigma, standard deviation normalized to the standard deviation of best picks
rsdl(sec) = residual (observed - fitted travel time), in secs
dtb(m) = depth to bottom in meters
thk(m) = thickness of layer in meters
v(m/s) = velocity in meters per second
vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
vu(m/s) = upper limit of velocity in meters per second
dtb(ft) = depth to bottom of layer in feet
thk(ft) = thickness of layer in feet
vf(ft/s) = velocity in feet per second
vl(ft/s) = lower limit of velocity in feet per second
vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

VAN NUYS QUADRANGLE
CALIFORNIA—LOS ANGELES CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

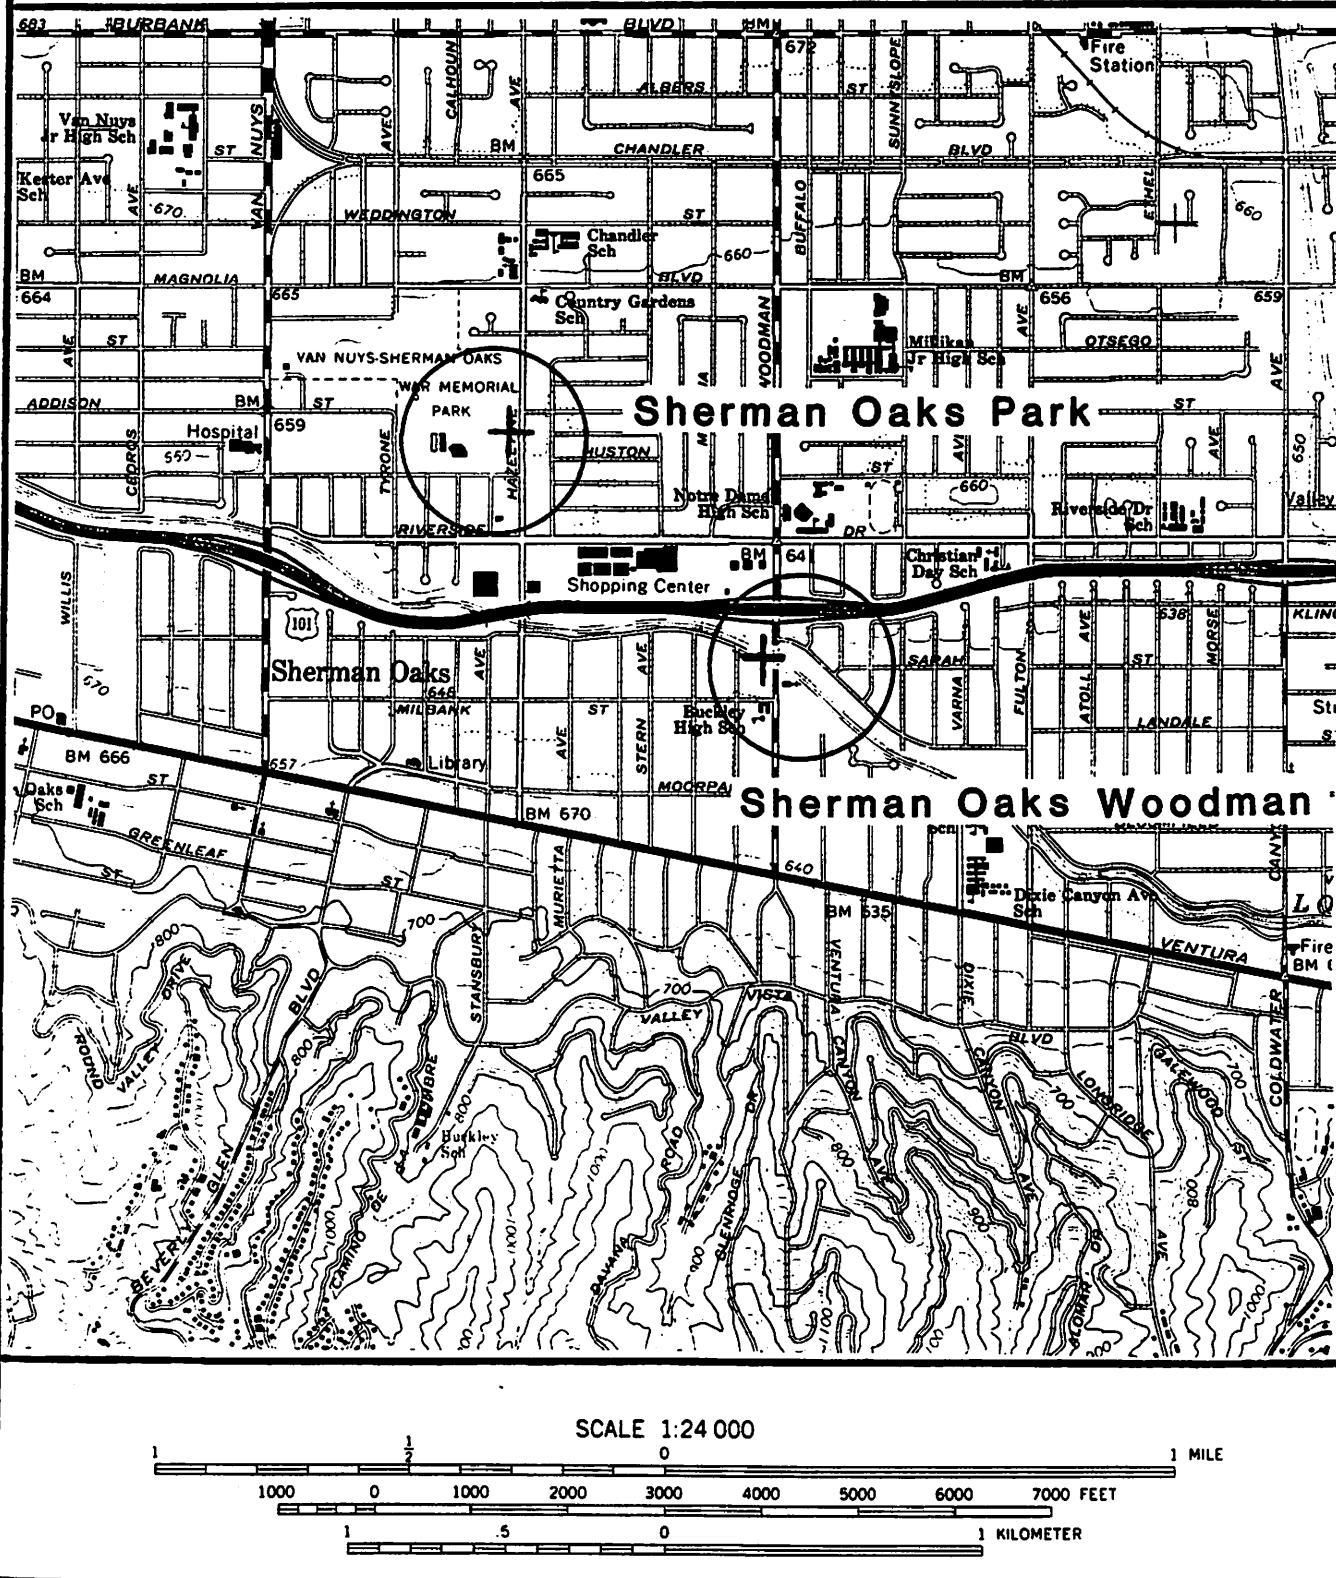


Figure A-46. Site location map for the borehole at Sherman Oaks Woodman. No accelerograph is located at this site.

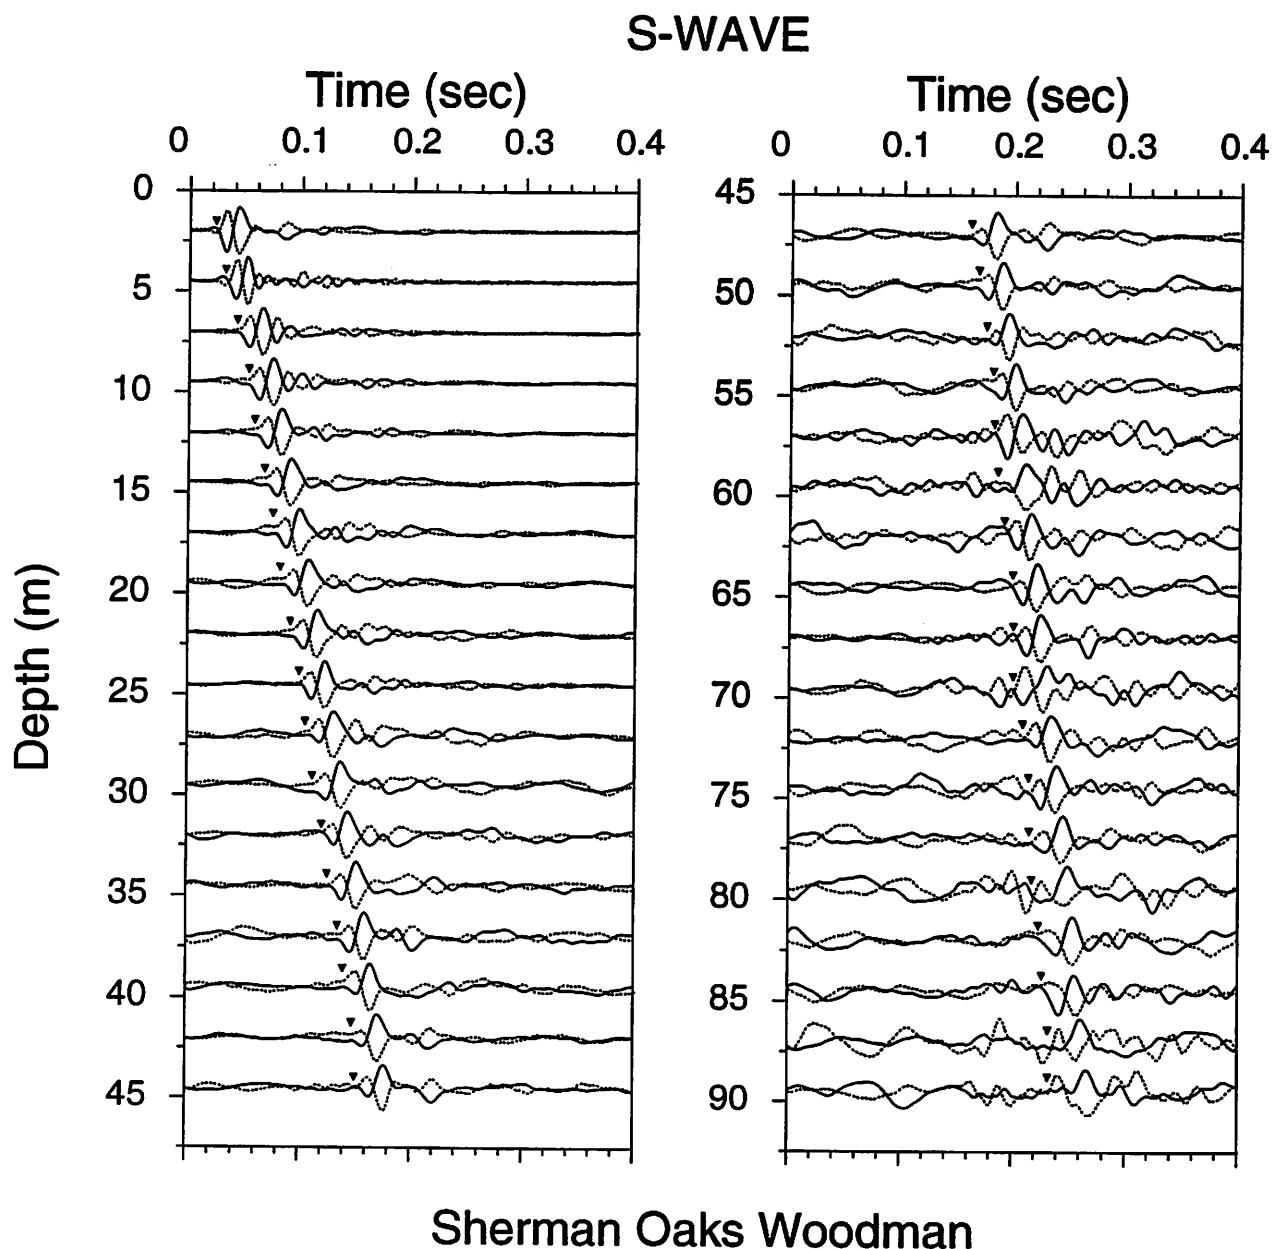


Figure A-47. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

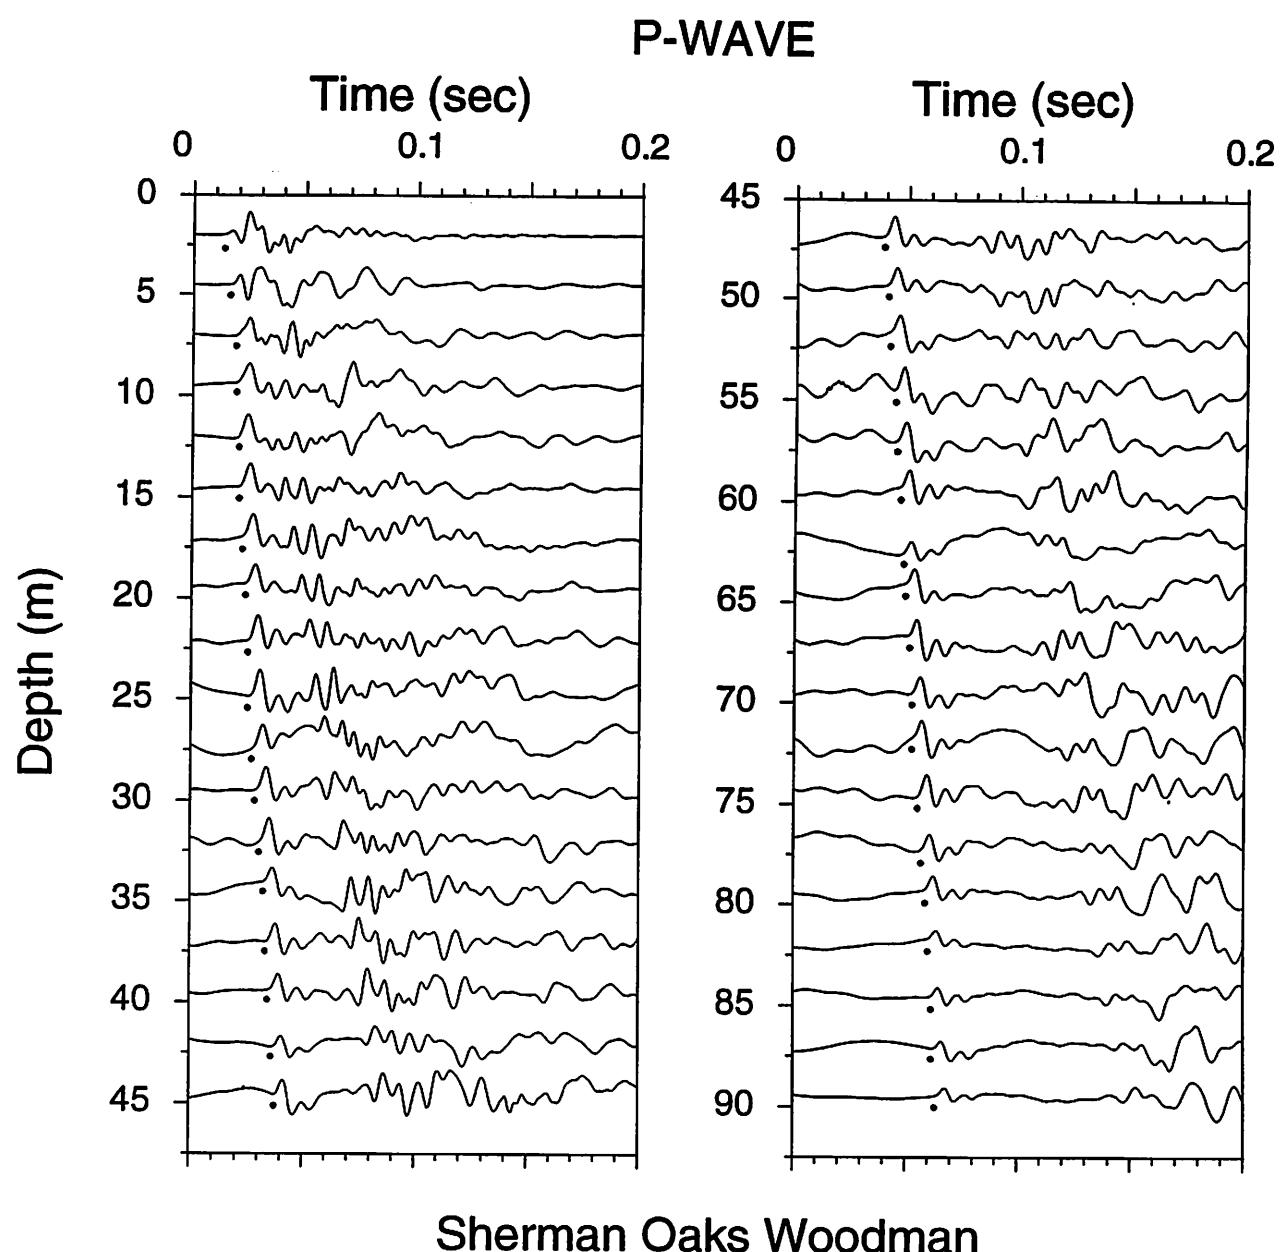


Figure A-48. Vertical component record section. P-wave arrivals are indicated by the solid circles.

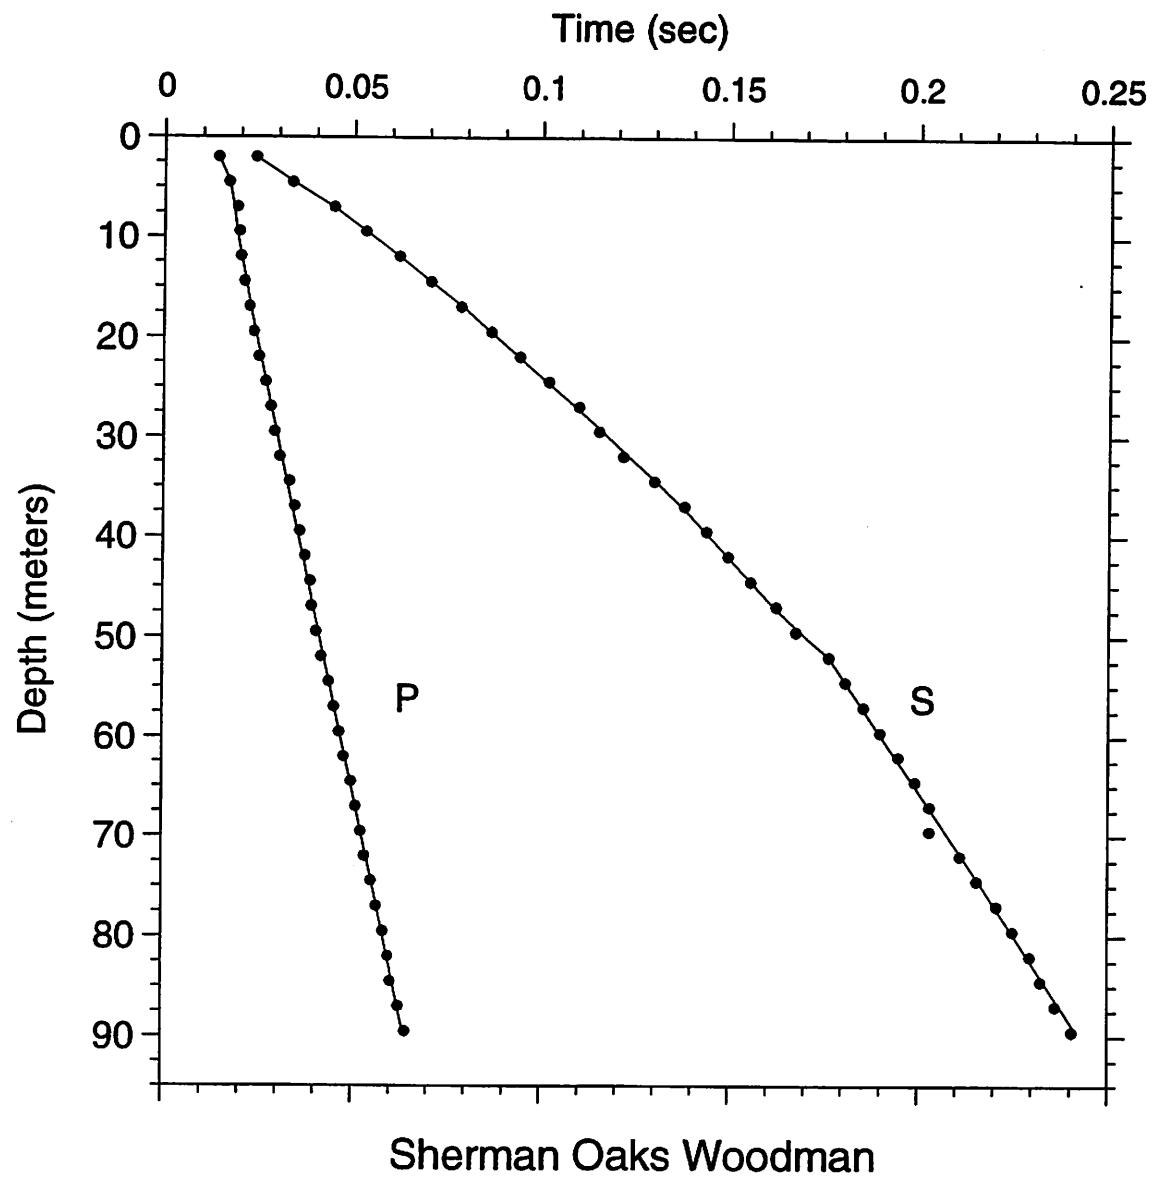


Figure A-49. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

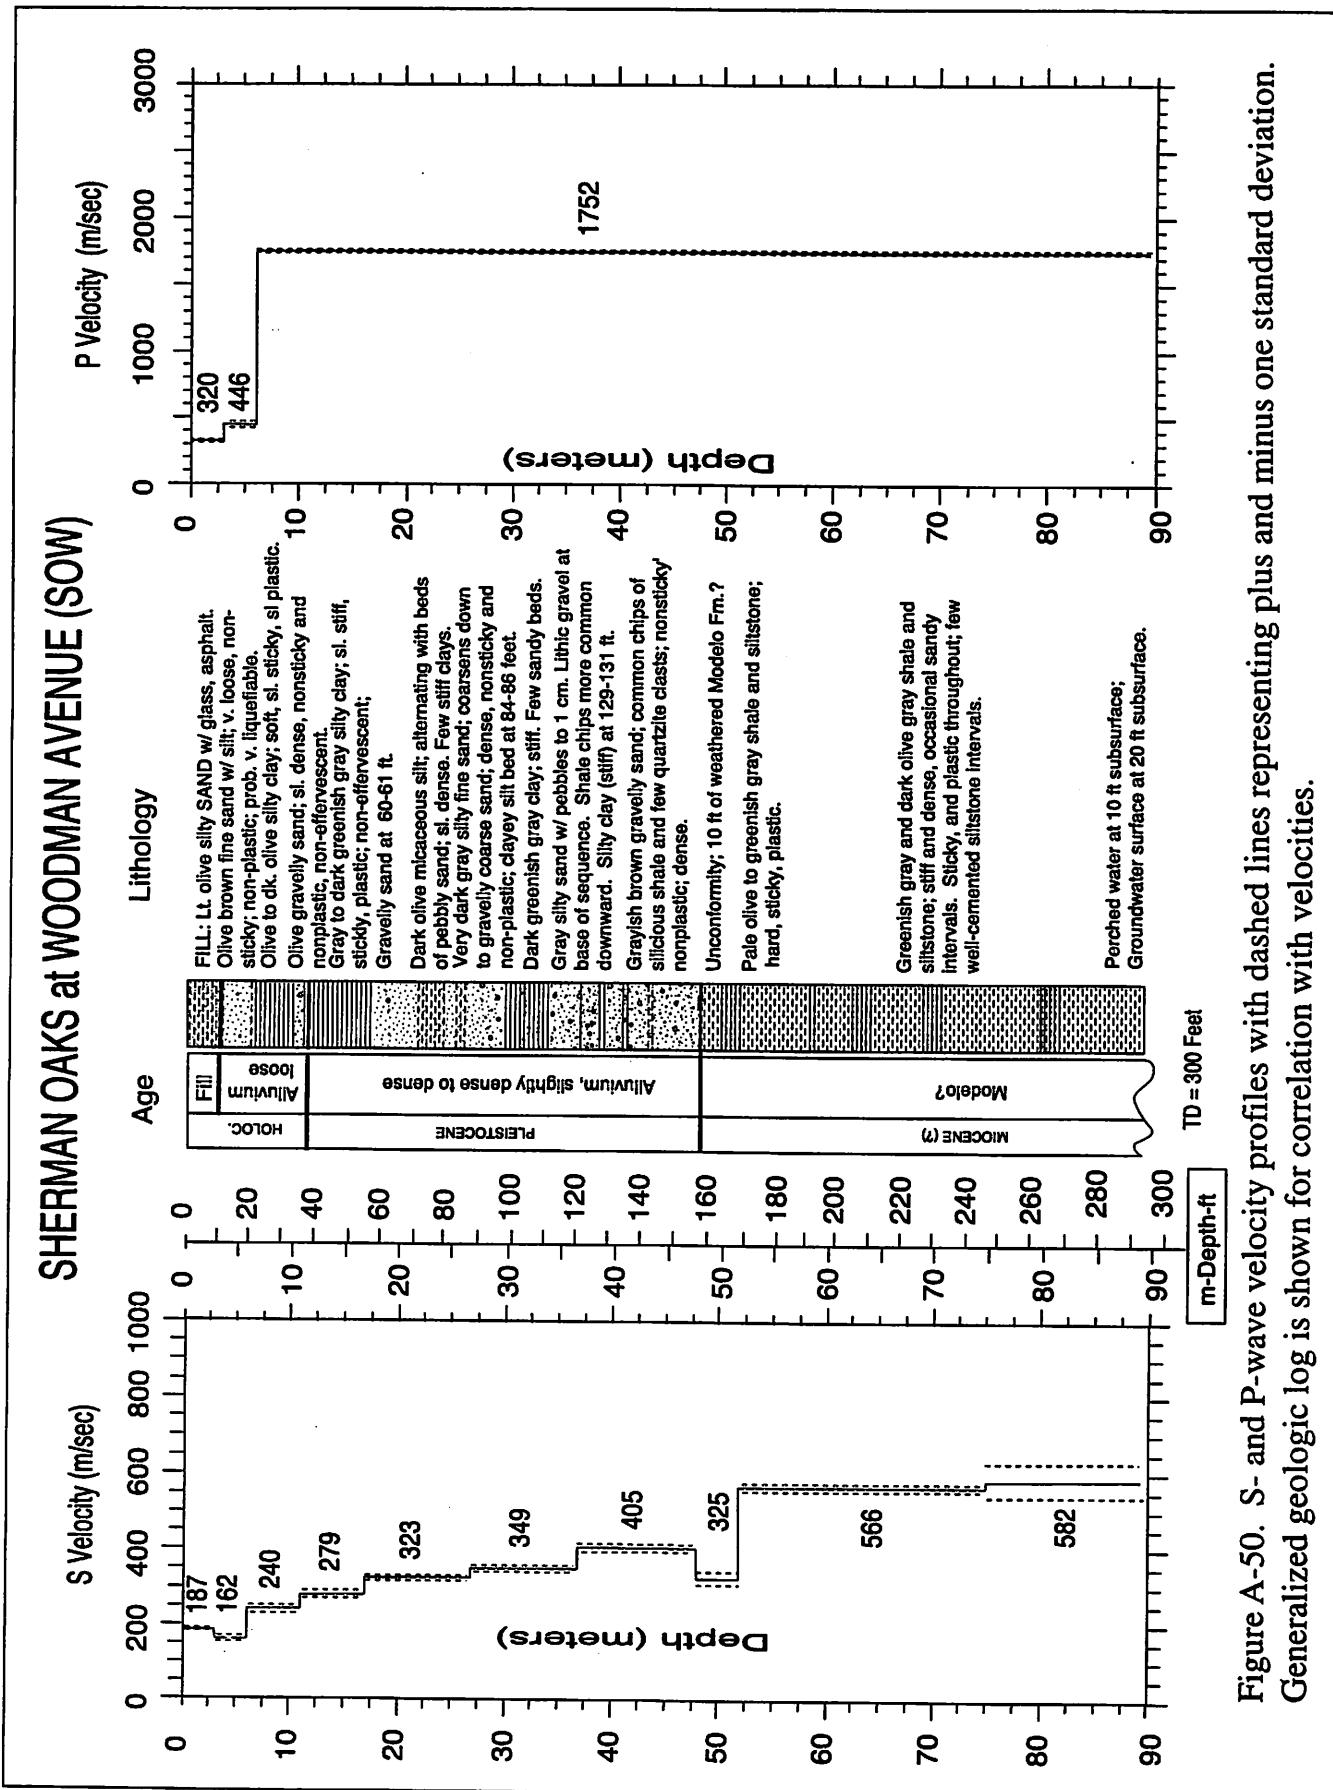


Figure A-50. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-19. S-wave arrival times and velocity summaries.

Location: Sherman Oaks Woodman
Coordinates: 34.15430 118.43070 Hole_Code: 272
Offset = 4.00 travel-time file: SOWS.TT

d(m)	d(ft)	ts(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(m)	thk(m)	v(m/s)	vu(m/s)	vl(m/s)	thk(ft)	dtb(ft)	thk(ft/s)	v(ft/s)	vu(ft/s)	vl(ft/s)
2.0	6.6	0.0240	0.0107	187	1	0.0001	3.0	3.0	183	192	9.8	614	9.8	614	599	629	
4.5	14.8	0.0336	0.0253	178	1	-0.0002	6.0	3.0	162	155	19.7	9.8	532	509	559	558	
7.0	23.0	0.0446	0.0387	181	1	0.0002	11.0	5.0	240	230	252	36.1	16.4	789	755	826	
9.5	31.2	0.0530	0.0491	194	1	-0.0001	17.0	6.0	279	270	289	55.8	19.7	916	885	949	
12.0	39.4	0.0620	0.0589	204	1	0.0000	27.0	10.0	323	316	330	88.6	32.8	1058	1036	1082	
14.5	47.6	0.0704	0.0679	214	1	0.0001	37.0	10.0	349	341	356	121.4	32.8	1143	1119	1169	
17.0	55.8	0.0784	0.0768	221	1	-0.0004	48.0	11.0	405	395	416	157.5	36.1	1329	1295	1365	
19.5	64.0	0.0864	0.0846	231	1	0.0002	52.0	4.0	325	308	344	170.6	13.1	1066	1011	1127	
22.0	72.2	0.0940	0.0923	238	1	0.0003	75.0	23.0	566	557	575	246.1	75.5	1857	1829	1887	
24.5	80.4	0.1018	0.1001	245	1	0.0009	89.5	14.5	582	542	629	293.6	47.6	1910	1777	2065	
27.0	88.6	0.1098	0.1078	250	1	0.0009	105.0	257	-	-	-	-	-	-	-	-	
29.5	96.8	0.1152	0.1150	257	1	-0.0008	121.4	262	-	-	-	-	-	-	-	-	
32.0	105.0	0.1216	0.1222	262	1	-0.0015	137.0	267	-	-	-	-	-	-	-	-	
34.5	113.2	0.1298	0.1293	267	1	-0.0004	153.0	271	-	-	-	-	-	-	-	-	
37.0	121.4	0.1380	0.1365	271	1	0.0007	168.5	277	-	-	-	-	-	-	-	-	
39.5	129.6	0.1438	0.1427	277	1	0.0004	184.0	282	1	0.0001	d(m)	= depth in meters	dsdft	= depth in feet	ts(s)	= observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.	
42.0	137.8	0.1496	0.1489	282	1	0.0001	199.5	287	1	0.0000	tvrt(s)	= vertical travel time computed from the model	vavg(m/s)	= average velocity from the surface to each depth, computed as avg_vel = d(m)/tvrt(s)	sig	= sigma, standard deviation normalized to the standard deviation of best picks	
44.5	146.0	0.1556	0.1550	287	1	0.0007	215.0	292	1	0.0012	rsdl(sec)	= residual (observed - fitted travel time), in secs	rdtb(m)	= depth to bottom in meters	thk(m)	= thickness of layer in meters	
47.0	154.2	0.1624	0.1612	292	1	0.0007	230.5	294	1	-0.0012	v(m/s)	= velocity in meters per second	vl(m/s)	= lower limit of velocity in meters per second (see text for explanation of velocity limits)	vu(m/s)	= upper limit of velocity in meters per second	
49.5	162.4	0.1676	0.1683	294	1	-0.0012	246.0	294	1	-0.0001	dtb(ft)	= depth to bottom of layer in feet	thk(ft)	= thickness of layer in feet	vl(ft/s)	= lower limit of velocity in feet per second	
52.0	170.6	0.1764	0.1760	295	1	-0.0001	261.5	295	1	-0.0001	vu(ft/s)	= upper limit of velocity in feet per second	vl(ft/s)	= lower limit of velocity in feet per second	vu(ft/s)	= upper limit of velocity in feet per second	
54.5	178.8	0.1808	0.1804	302	1	0.0004	277.0	308	2	0.0004	-	-	-	-	-	-	
57.0	187.0	0.1856	0.1848	308	2	0.0004	292.5	314	3	0.0004	-	-	-	-	-	-	
59.5	195.2	0.1900	0.1892	314	3	0.0004	308.0	320	3	0.0008	-	-	-	-	-	-	
62.0	203.4	0.1948	0.1936	320	3	0.0008	323.5	326	2	0.0008	-	-	-	-	-	-	
64.5	211.6	0.1992	0.1981	326	2	0.0008	339.0	331	1	0.0012	-	-	-	-	-	-	
67.0	219.8	0.2030	0.2025	331	1	0.0012	354.5	354	4	0.0004	-	-	-	-	-	-	
69.5	228.0	0.2030	0.2049	336	3	-0.0042	370.0	341	-1	0.0004	-	-	-	-	-	-	
72.0	236.2	0.2112	0.2113	341	-1	-0.0004	385.5	345	1	-0.0004	-	-	-	-	-	-	
74.5	244.4	0.2156	0.2157	345	1	-0.0004	399.0	350	1	0.0005	-	-	-	-	-	-	
77.0	252.6	0.2208	0.2200	350	1	0.0005	414.5	354	4	0.0004	-	-	-	-	-	-	
79.5	260.8	0.2250	0.2243	354	4	0.0004	429.0	359	3	0.0007	-	-	-	-	-	-	
82.0	269.0	0.2296	0.2286	359	3	0.0007	444.5	363	4	-0.0007	-	-	-	-	-	-	
84.5	277.2	0.2324	0.2329	363	4	-0.0007	459.0	367	5	-0.0012	-	-	-	-	-	-	
87.0	285.4	0.2362	0.2372	367	5	-0.0012	474.5	371	5	-0.0011	-	-	-	-	-	-	
89.5	293.6	0.2406	0.2415	371	5	-0.0011	-	-	-	-	-	-	-	-	-	-	

TABLE A-20. P-Wave arrival times and velocity summaries.

Location:	Sherman Oaks Woodman	Coordinates:	34.15430	118.43070	Hole_Code:	272
Offset =	4.00	travel-time file:	SOUP.TT		layers =	3
d(m)	ts(s)	tvrt(s)	vavg(m/s)	rsdl(sec)	dtb(ft)	thk(ft)
6.6	0.0140	0.0062	320	1	0.0000	3.0
2.0	0.0168	0.0127	353	1	-0.0001	6.0
4.5	0.0190	0.0167	420	1	0.0009	4.46
7.0	0.0196	0.0181	525	1	0.0007	4.24
9.5	0.0200	0.0195	615	1	-0.0001	4.69
12.0	0.0210	0.0210	692	1	-0.0004	19.7
14.5	0.0224	0.0224	760	1	-0.0003	9.8
17.0	0.0236	0.0228	819	1	-0.0005	331
19.5	0.0236	0.0228	819	1	-0.0005	1051
22.0	0.0250	0.0252	872	1	-0.0005	1018
24.5	0.0268	0.0267	919	1	-0.0001	1085
27.0	0.0282	0.0281	961	1	-0.0001	1392
29.5	0.0292	0.0295	1000	1	-0.0005	1540
32.0	0.0306	0.0309	1034	1	-0.0005	5781
34.5	0.0332	0.0324	1066	1	0.0007	
37.0	0.0346	0.0338	1095	1	0.0007	
39.5	0.0360	0.0352	1122	1	0.0007	
42.0	0.0374	0.0366	1146	1	0.0006	
44.5	0.0388	0.0381	1169	1	0.0006	
47.0	0.0392	0.0395	1190	1	-0.0004	
49.5	0.0404	0.0409	1210	1	-0.0006	
52.0	0.0418	0.0424	1228	1	-0.0006	
54.5	0.0438	0.0438	1245	1	-0.0001	
57.0	0.0452	0.0452	1261	1	-0.0001	
59.5	0.0466	0.0466	1276	1	-0.0001	
62.0	0.0478	0.0481	1290	1	-0.0003	
64.5	0.0498	0.0495	1303	1	0.0002	
67.0	0.0510	0.0509	1316	1	0.0000	
69.5	0.0524	0.0523	1328	1	0.0000	
72.0	0.0534	0.0538	1339	1	-0.0004	
74.5	0.0552	0.0552	1350	1	-0.0001	
77.0	0.0566	0.0566	1360	1	-0.0001	
79.5	0.0584	0.0580	1370	1	0.0003	
82.0	0.0598	0.0595	1379	1	0.0003	
84.5	0.0604	0.0609	1388	1	-0.0006	
87.0	0.0626	0.0623	1396	1	0.0002	
89.5	0.0644	0.0637	1404	1	0.0006	

Explanation:
d(m) = depth in meters
df(ft) = depth in feet
ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
tvrt(s) = vertical travel time computed from the model
vavg(m/s) = average velocity from the surface to each depth, computed as avg_vel = d(m)/tvrt(s)
sig = sigma, standard deviation normalized to the standard deviation of best picks
resdl(sec) = residual (observed - fitted travel time), in secs
dtb(m) = depth to bottom in meters
thk(m) = thickness of layer in meters
v(m/s) = velocity in meters per second
vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
vu(m/s) = upper limit of velocity in meters per second
dtb(ft) = depth to bottom of layer in feet
thk(ft) = thickness of layer in feet
vf(ft/s) = velocity in feet per second
vl(ft/s) = lower limit of velocity in feet per second
vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SAN FERNANDO QUADRANGLE
CALIFORNIA—LOS ANGELES CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

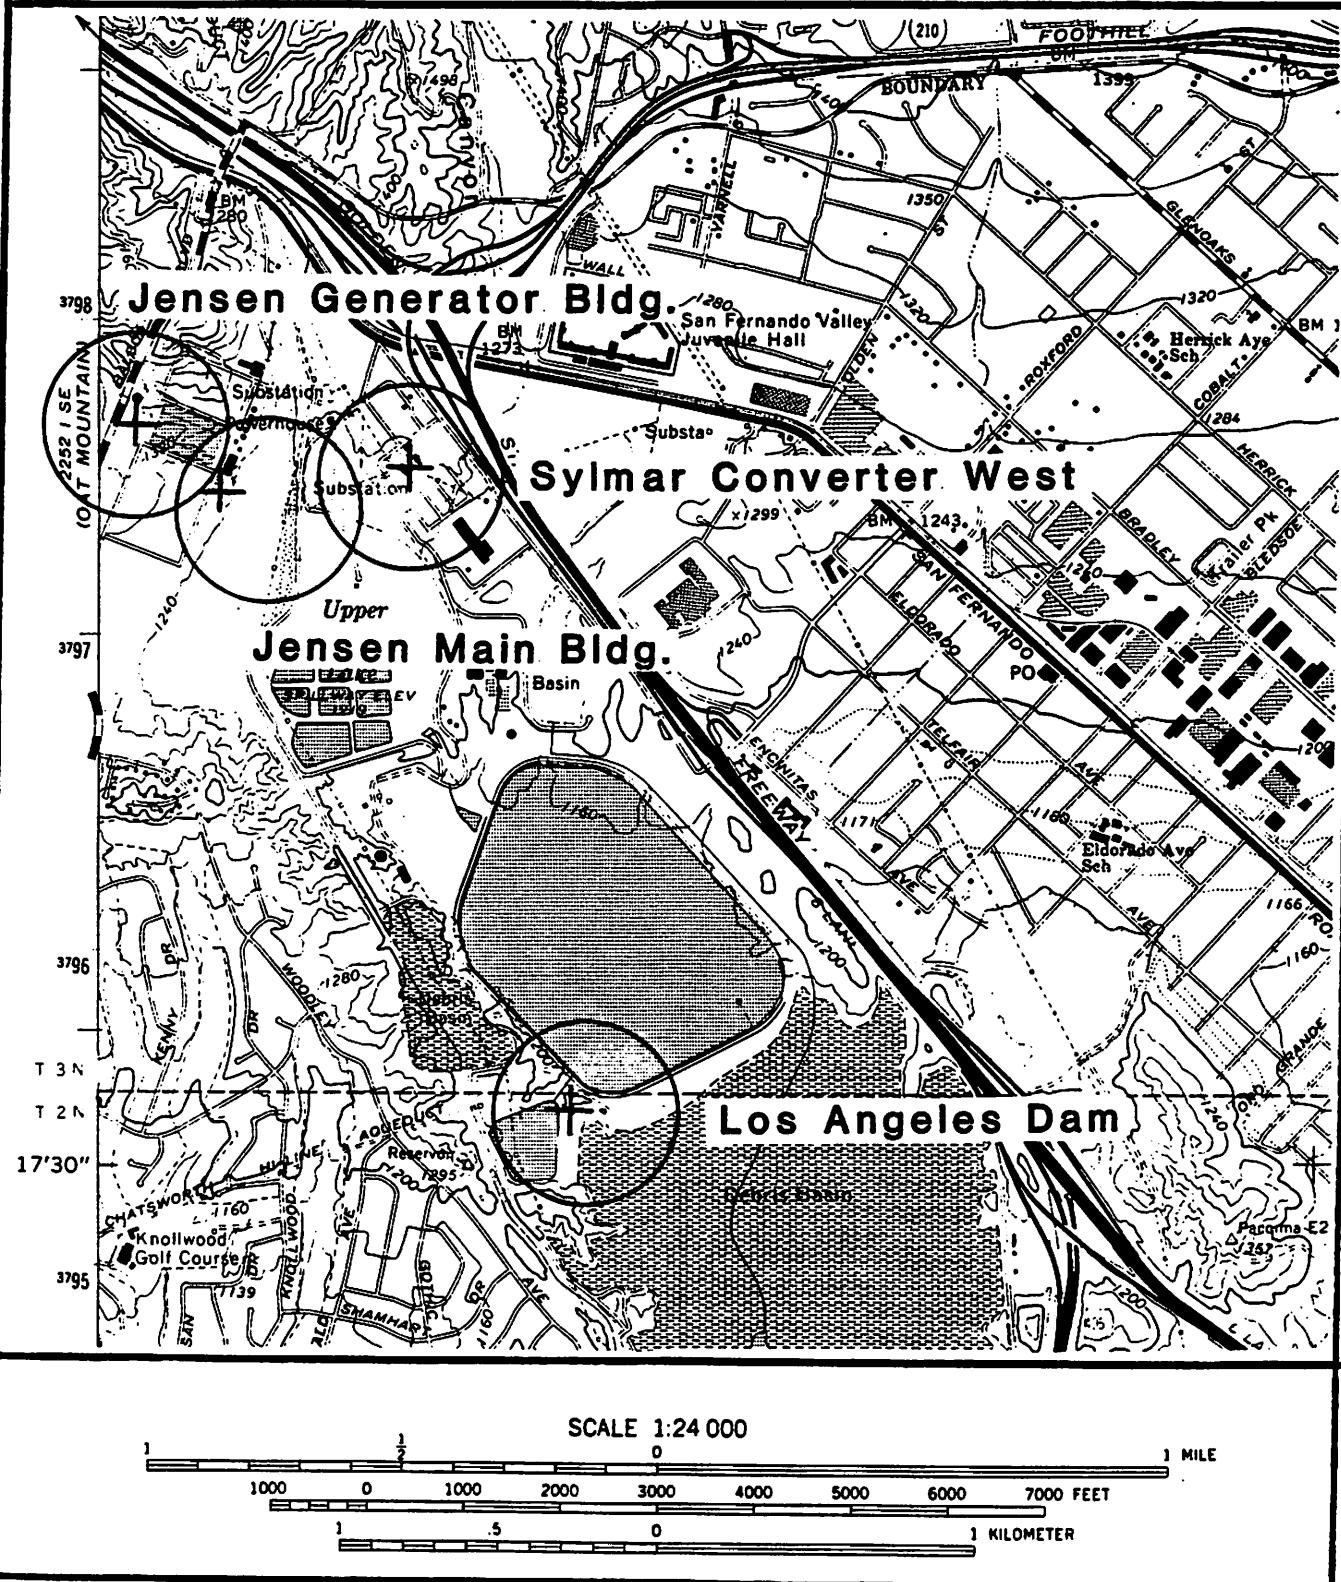


Figure A-51. Site location map for the borehole at Sylmar Converter West. The accelerograph is located approximately 10 meters from the borehole.

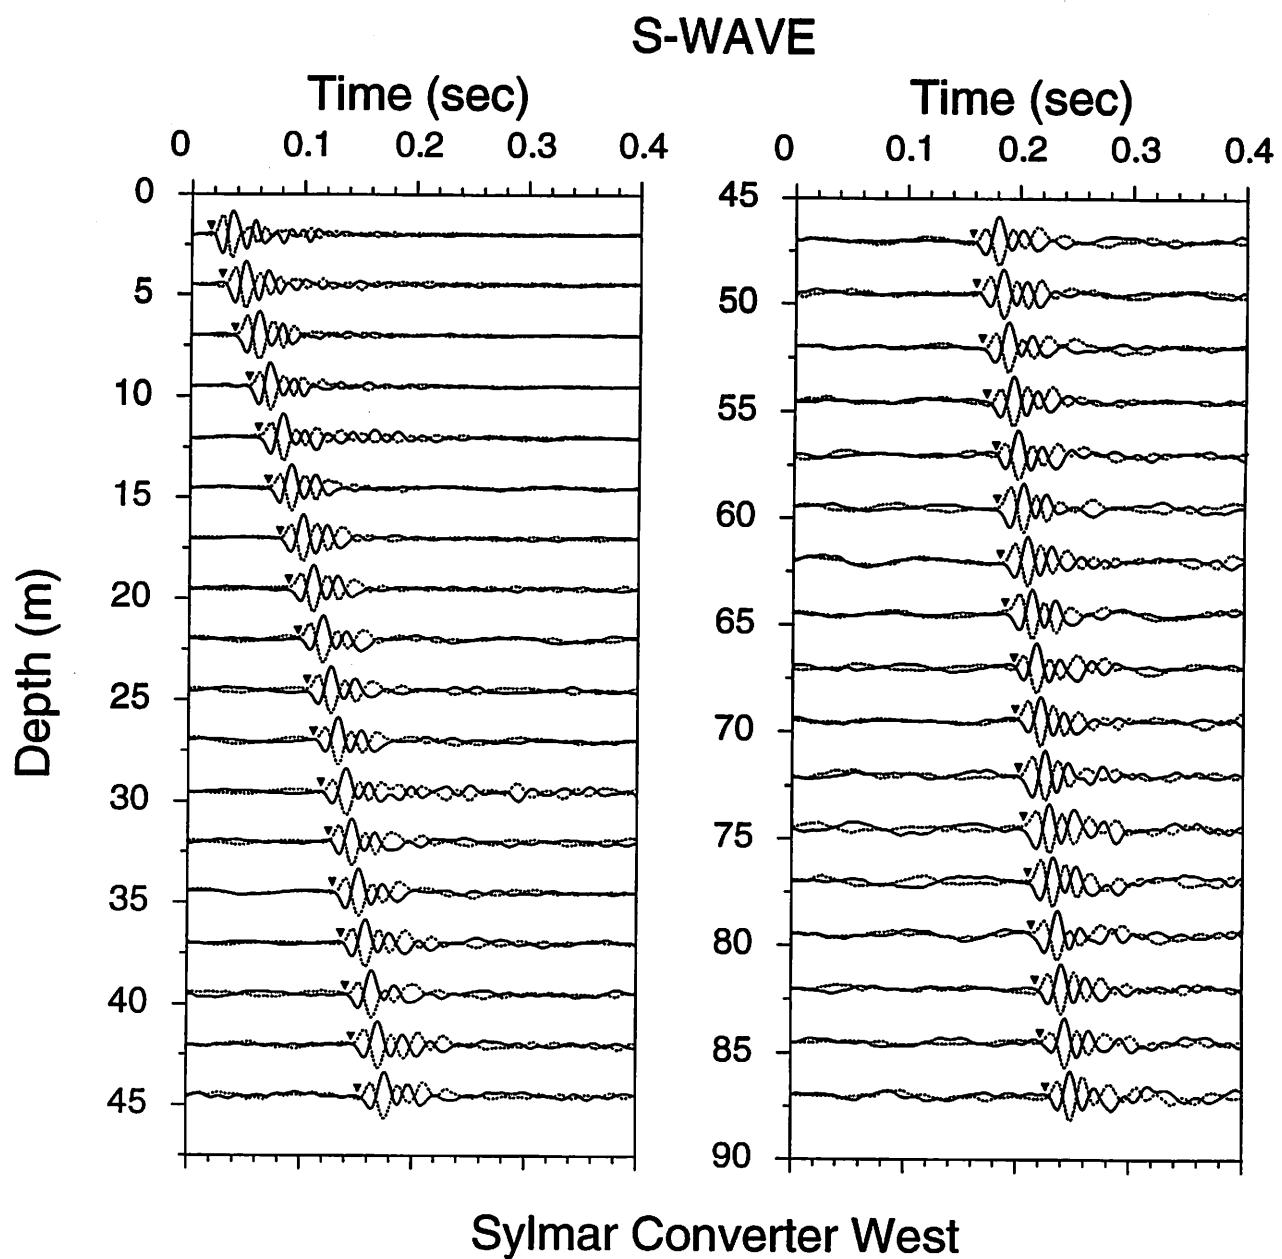


Figure A-52. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

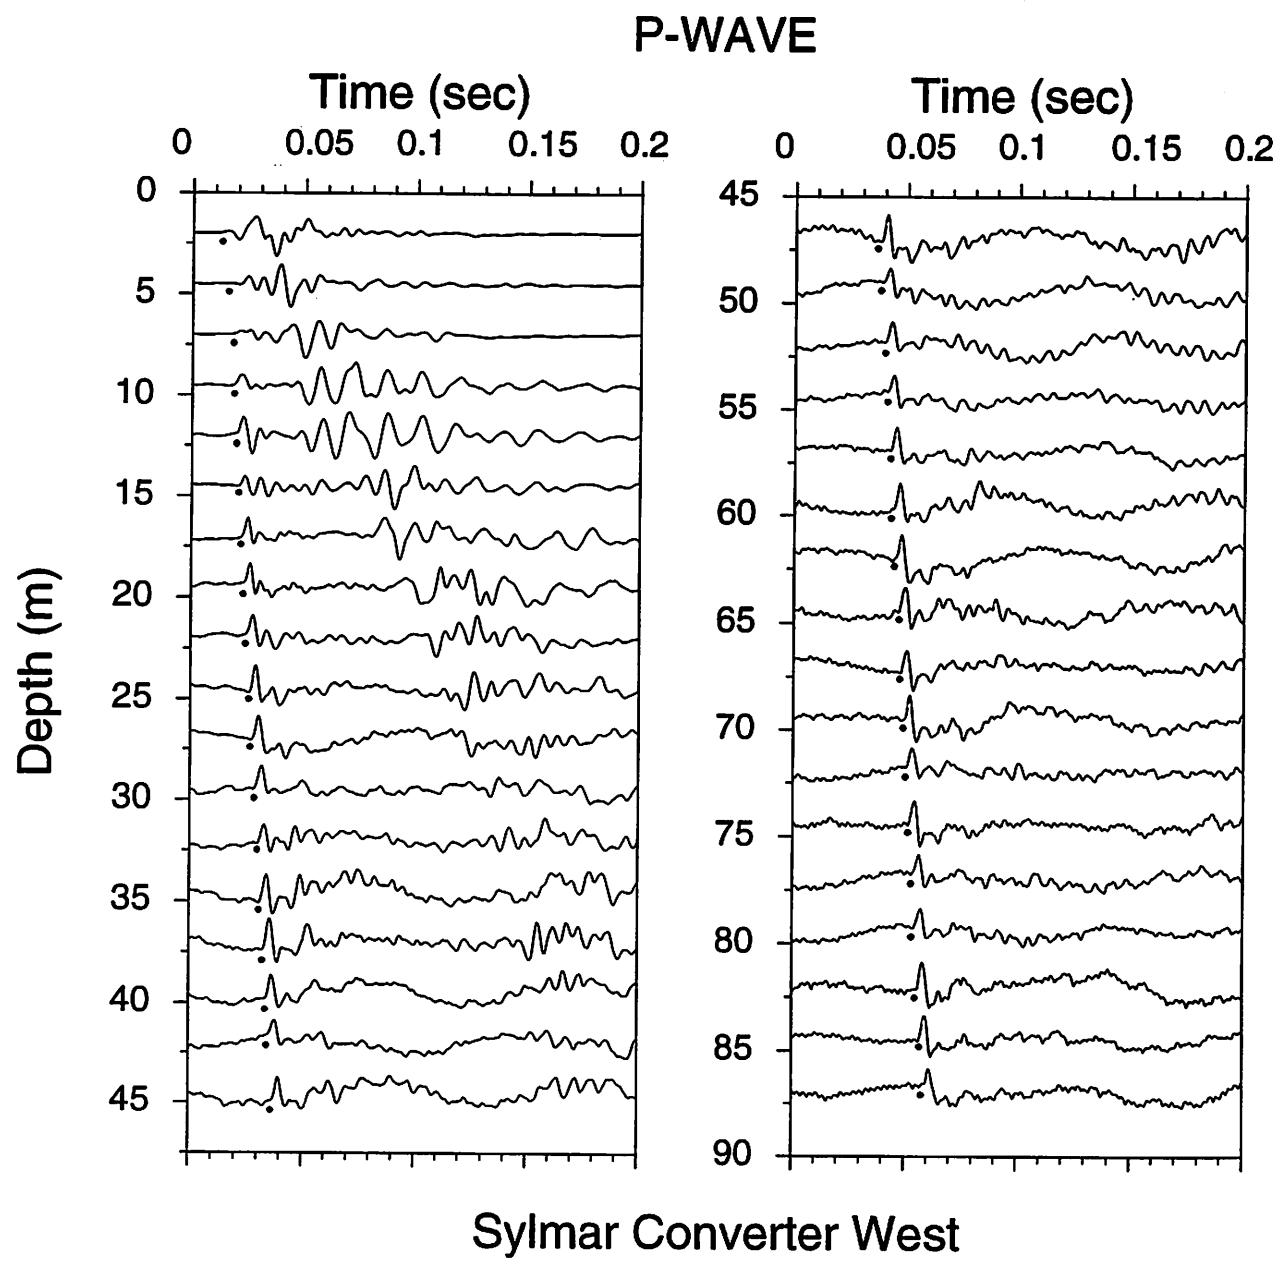


Figure A-53. Vertical component record section. P-wave arrivals are indicated by the solid circles.

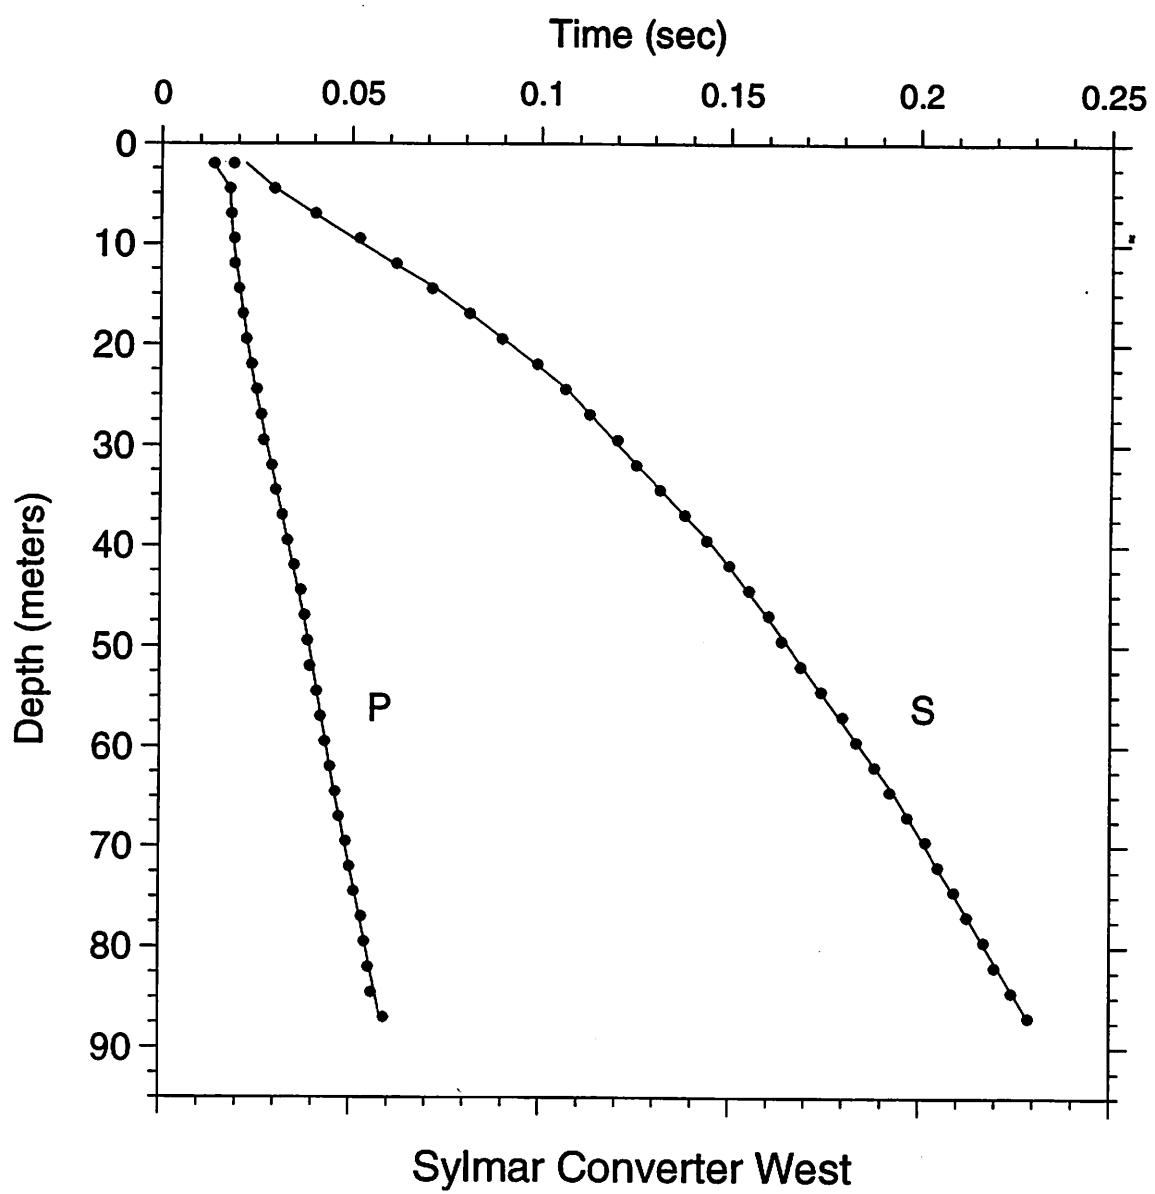


Figure A-54. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

Sylmar Converter West (SCW)

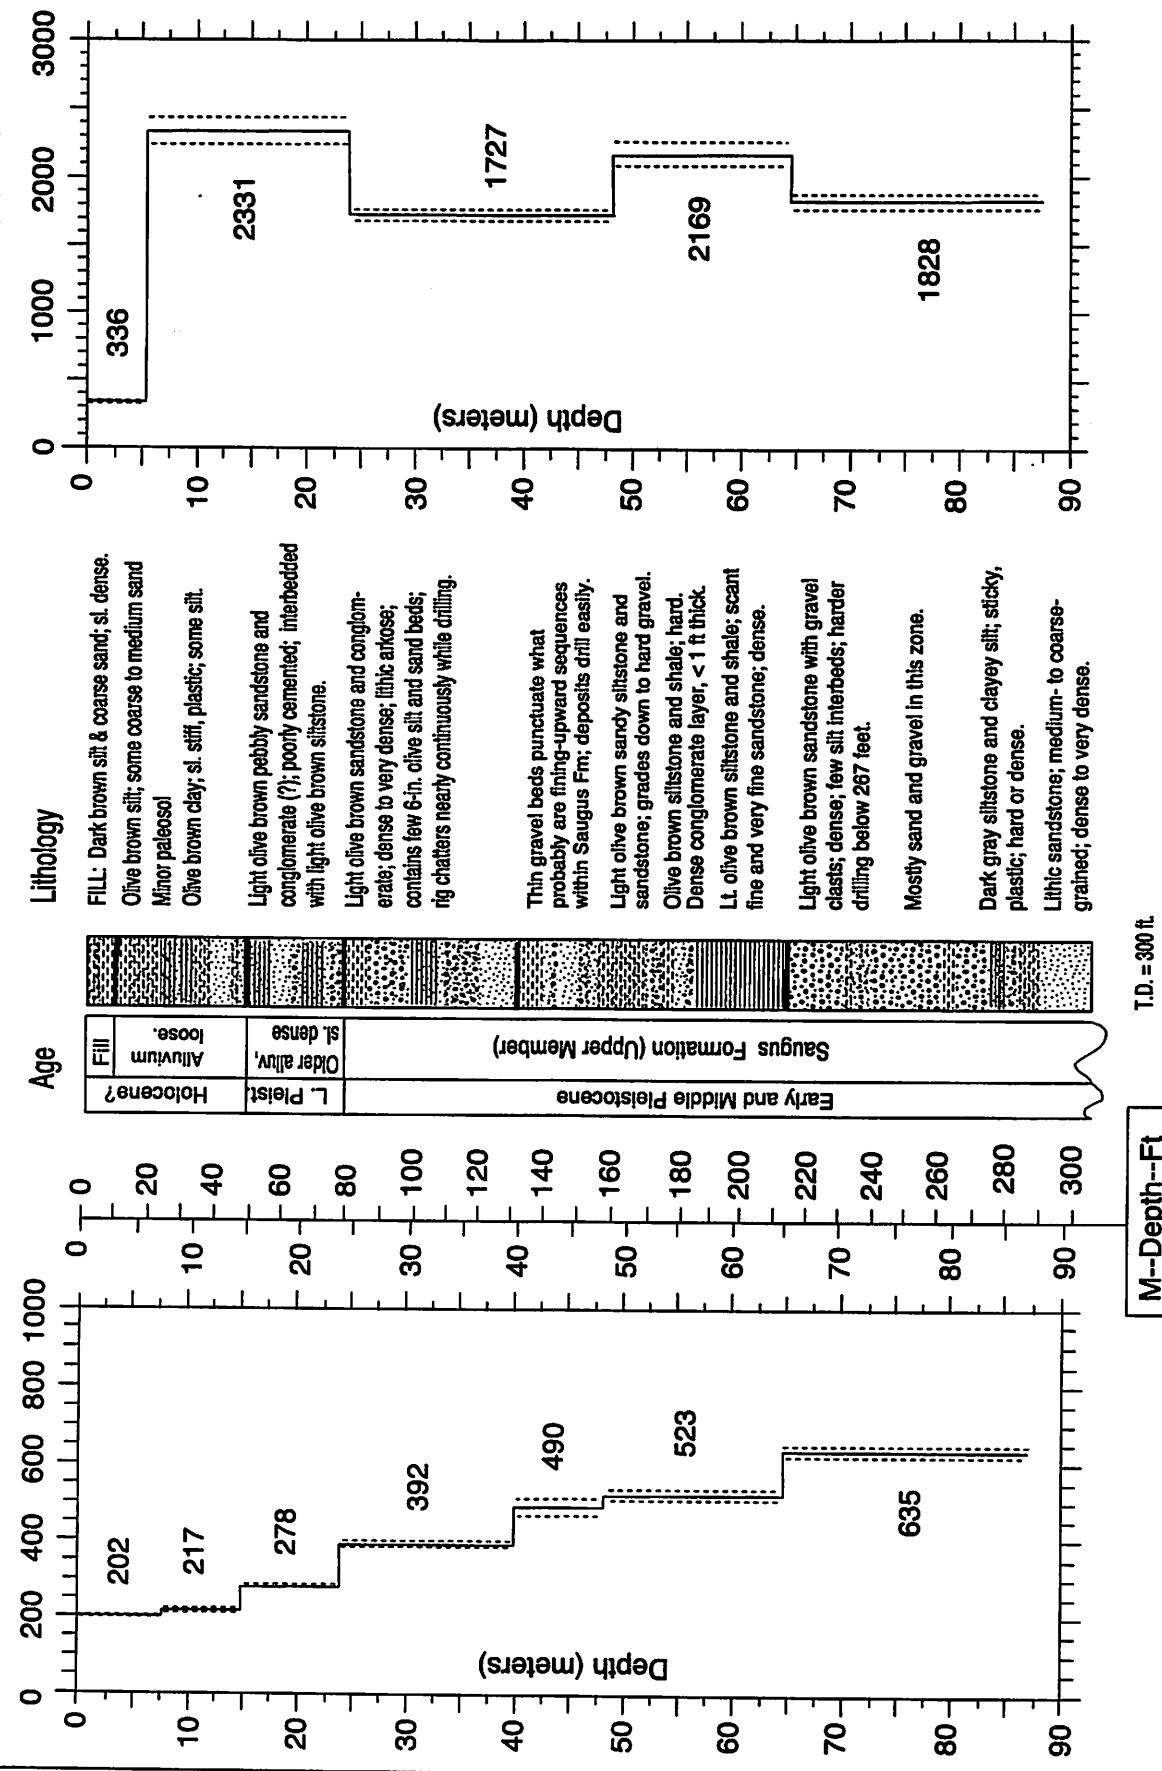


Figure A-55. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation. Generalized geologic log is shown for correlation with velocities.

TABLE A-21. S-Wave arrival times and velocity summaries.

Location:	Sylmar Converter West	Coordinates:	34.31170	118.48930	Hole_Code:	271
offset =	4.00	travel-time file: scws.tt			nlayers =	7
d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	rstdl(sec)	dtb(m)	thk(m)
2.0	6.6	0.0188	0.0099	202	-0.0033	7.6
4.5	14.8	0.0296	0.0223	202	-0.0002	15.0
7.0	23.0	0.0404	0.0346	202	0.0005	24.0
9.5	31.2	0.0520	0.0464	205	0.0017	40.0
12.0	39.4	0.0618	0.0579	207	0.0007	48.2
14.5	47.6	0.0712	0.0695	209	-0.0009	64.6
17.0	55.8	0.0810	0.0790	215	-0.0001	87.0
19.5	64.0	0.0896	0.0880	222	1	-0.0002
22.0	72.2	0.0990	0.0970	227	1	-0.0004
24.5	80.4	0.1064	0.1055	232	1	-0.0004
27.0	88.6	0.1128	0.1119	241	-0.0002	
29.5	96.8	0.1202	0.1182	249	1	-0.0009
32.0	105.0	0.1252	0.1246	257	1	-0.0003
34.5	113.2	0.1316	0.1310	263	1	-0.0002
37.0	121.4	0.1382	0.1374	269	1	-0.0001
39.5	129.6	0.1440	0.1438	275	1	-0.0002
42.0	137.8	0.1500	0.1491	282	1	-0.0004
44.5	146.0	0.1552	0.1542	289	1	-0.0004
47.0	154.2	0.1604	0.1593	295	1	-0.0005
49.5	162.4	0.1638	0.1643	301	1	-0.0009
52.0	170.6	0.1690	0.1690	308	1	-0.0005
54.5	178.8	0.1744	0.1738	314	1	-0.0002
57.0	187.0	0.1800	0.1786	319	1	0.0010
59.5	195.2	0.1836	0.1834	324	1	-0.0001
62.0	203.4	0.1884	0.1881	330	1	-0.0001
64.5	211.6	0.1924	0.1929	334	1	-0.0009
67.0	219.8	0.1970	0.1969	340	1	-0.0002
69.5	228.0	0.2018	0.2008	346	1	0.0007
72.0	236.2	0.2052	0.2048	352	1	0.0002
74.5	244.4	0.2094	0.2087	357	1	0.0004
77.0	252.6	0.2128	0.2126	362	1	-0.0001
79.5	260.8	0.2172	0.2166	367	1	0.0004
82.0	269.0	0.2200	0.2205	372	1	-0.0007
84.5	277.2	0.2244	0.2244	376	1	-0.0003
87.0	285.4	0.2288	0.2288	381	1	0.0002

Explanation:
 d(m) = depth in meters
 c(m) = depth in feet
 ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth,
 computed as $\text{avg_vel} = (\text{d(m)})/\text{tvrt(s)}$
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rstdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity in meters per second
 vl(m/s) = lower limit of velocity in meters per second
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

TABLE A-22. P-wave arrival times and velocity summaries.

Location:	Sylmar	Converter West	Coordinates:	34.31170	118.48330	Hole_Code:	271			
h_offset =	4.00	travel-time file:	scpt.tt	nlayers =	5					
d(ft)	tsl(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)
2.0	6.6	0.0136	0.0060	336	0.0003	5.5	5.5	18.0	1102	1118
4.5	14.8	0.0178	0.0134	336	1	-0.0001	24.0	18.5	60.7	768
7.0	23.0	0.0182	0.0170	411	1	0.0001	48.2	24.2	1727	1690
9.5	31.2	0.0190	0.0181	525	1	0.0003	64.6	16.4	2263	1767
12.0	39.4	0.0192	0.0192	626	1	-0.0004	87.0	22.4	1885	1774
14.5	47.6	0.0204	0.0202	717	-0.0002					
17.0	55.8	0.0214	0.0213	798	1	-0.0002				
19.5	64.0	0.0224	0.0224	872	1	-0.0002				
22.0	72.2	0.0238	0.0234	938	1	0.0002				
24.5	80.4	0.0252	0.0246	996	1	0.0004				
27.0	88.6	0.0264	0.0260	1037	1	0.0002				
29.5	96.8	0.0270	0.0275	1073	1	-0.0006				
32.0	105.0	0.0292	0.0289	1106	1	0.0001				
34.5	113.2	0.0302	0.0304	1135	1	-0.0003				
37.0	121.4	0.0320	0.0318	1162	1	0.0001				
39.5	129.6	0.0334	0.0333	1187	1	0.0000				
42.0	137.8	0.0352	0.0347	1209	1	0.0004				
44.5	146.0	0.0370	0.0362	1230	1	-0.0007				
47.0	154.2	0.0380	0.0376	1249	1	0.0003				
49.5	162.4	0.0388	0.0389	1272	1	-0.0002				
52.0	170.6	0.0394	0.0401	1298	1	-0.0008				
54.5	178.8	0.0412	0.0412	1322	1	-0.0001				
57.0	187.0	0.0422	0.0424	1345	1	-0.0002				
59.5	195.2	0.0434	0.0435	1367	1	-0.0000				
62.0	203.4	0.0448	0.0447	1388	1	0.0001				
64.5	211.6	0.0462	0.0458	1407	1	0.0003				
67.0	219.8	0.0472	0.0472	1420	1	-0.0001				
69.5	228.0	0.0490	0.0486	1431	1	0.0004				
72.0	236.2	0.0500	0.0499	1442	1	0.0000				
74.5	244.4	0.0512	0.0513	1452	1	-0.0002				
77.0	252.6	0.0532	0.0527	1462	1	0.0005				
79.5	260.8	0.0540	0.0540	1471	1	-0.0001				
82.0	269.0	0.0550	0.0554	1480	1	-0.0004				
84.5	277.2	0.0558	0.0568	1489	1	-0.0010				
87.0	285.4	0.0592	0.0581	1497	1	0.0010				

Explanation:
 d(m) = depth in meters
 dtb(ft) = depth in feet
 tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
 tvrt(s) = vertical travel time computed from the model.
 vavg(m/s) = average velocity from the surface to each depth, computed as $v = d(m)/tvrt(s)$
 sig = sigma, standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity in meters per second
 vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 v(ft/s) = velocity in feet per second
 vl(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

CANOGA PARK QUADRANGLE
CALIFORNIA-LOS ANGELES CO
7.5 MINUTE SERIES (TOPOGRAPHIC)

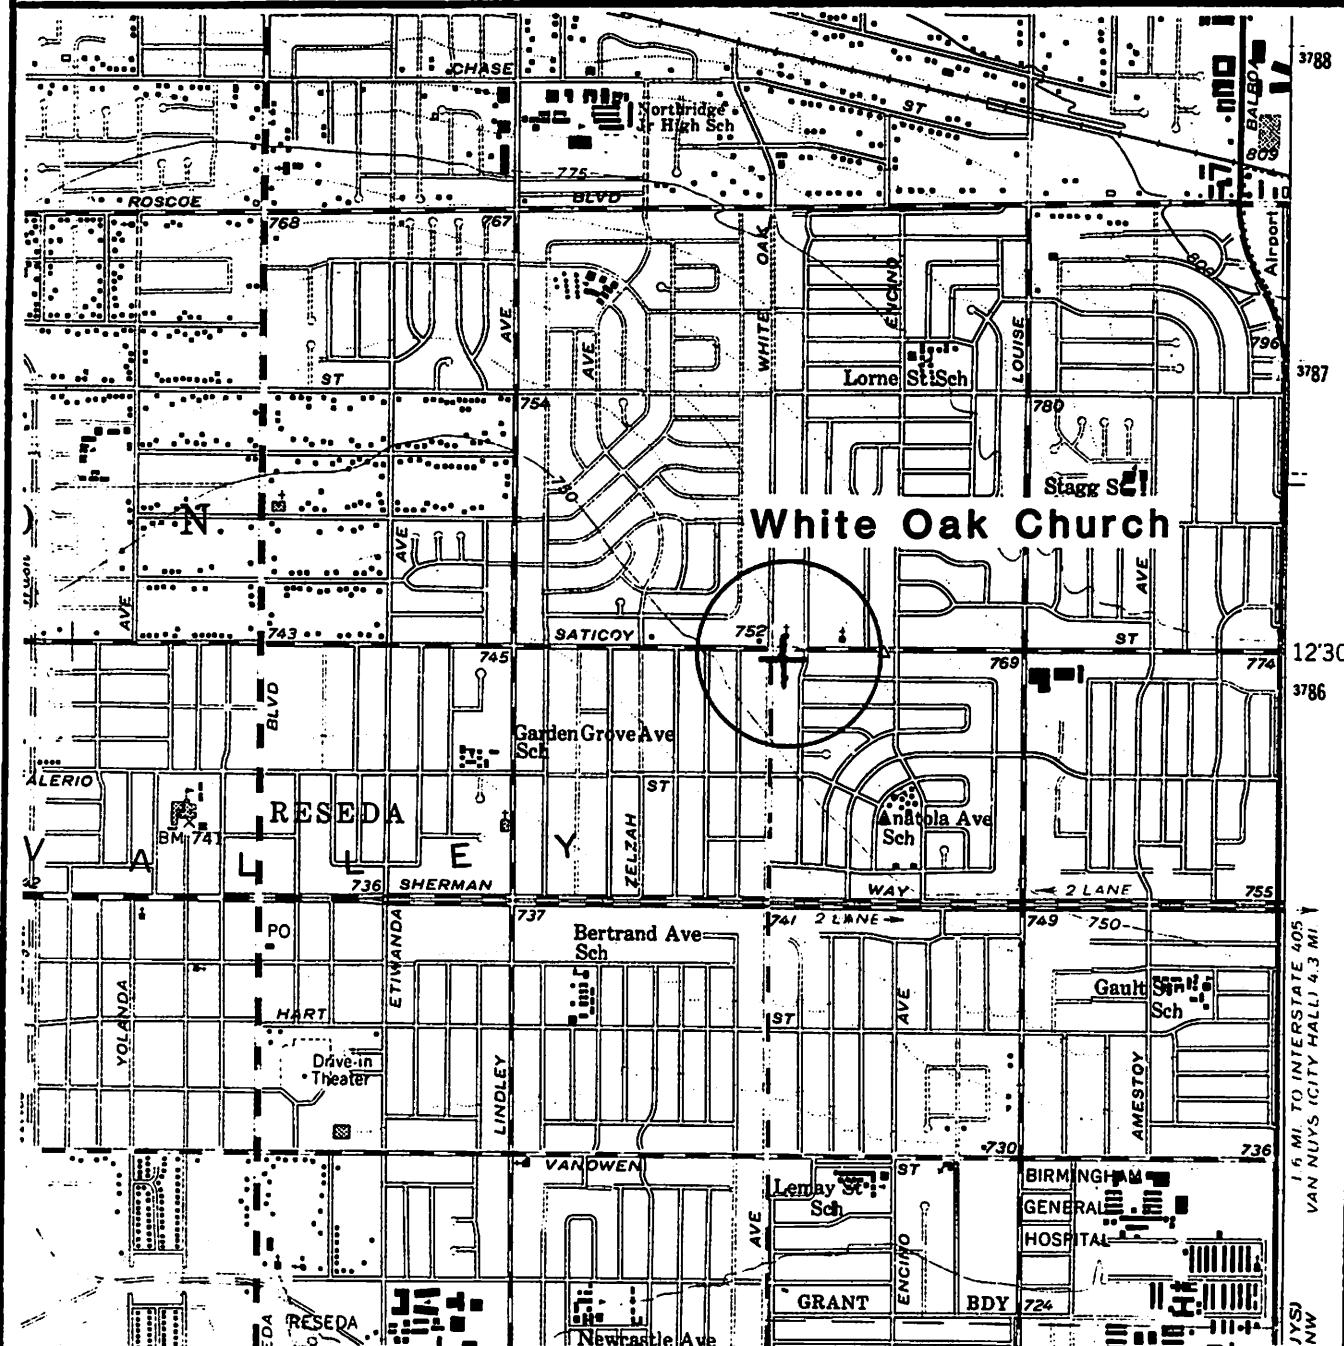


Figure A-56. Site location map for the borehole at White Oak Church. The accelerograph is located approximately 50 meters from the borehole.

100

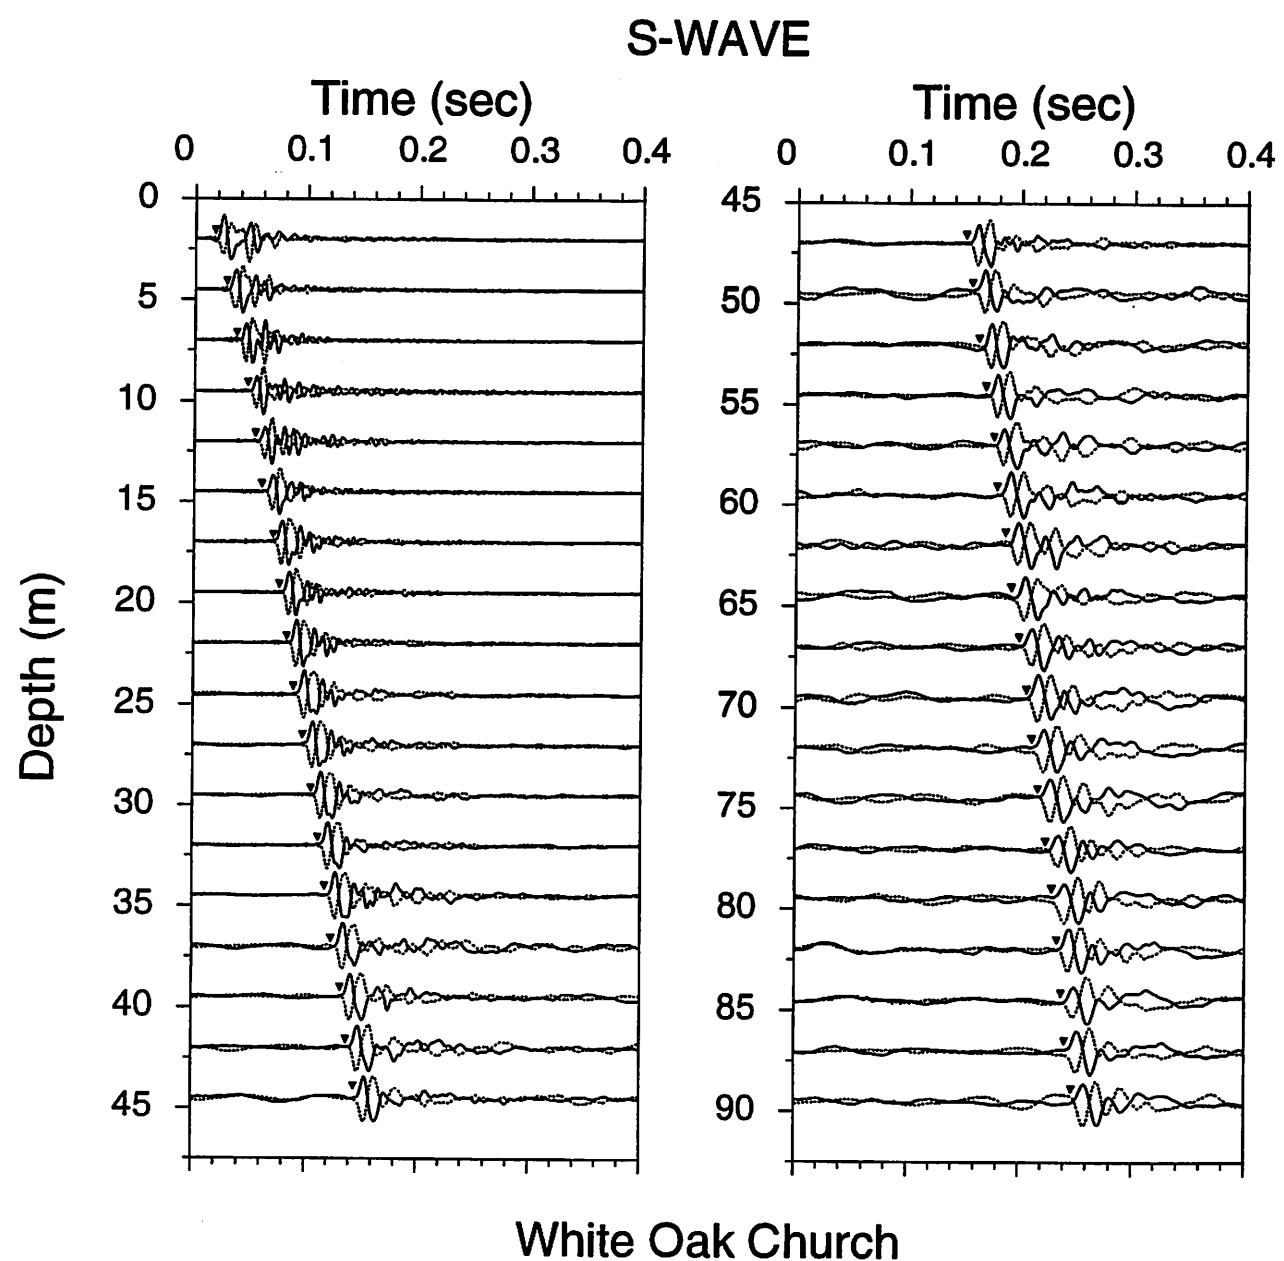


Figure A-57. Horizontal component record section (from impacts in opposite directions) superimposed for identification of S-wave onset. Approximate S-wave time picks are indicated by the inverted triangles.

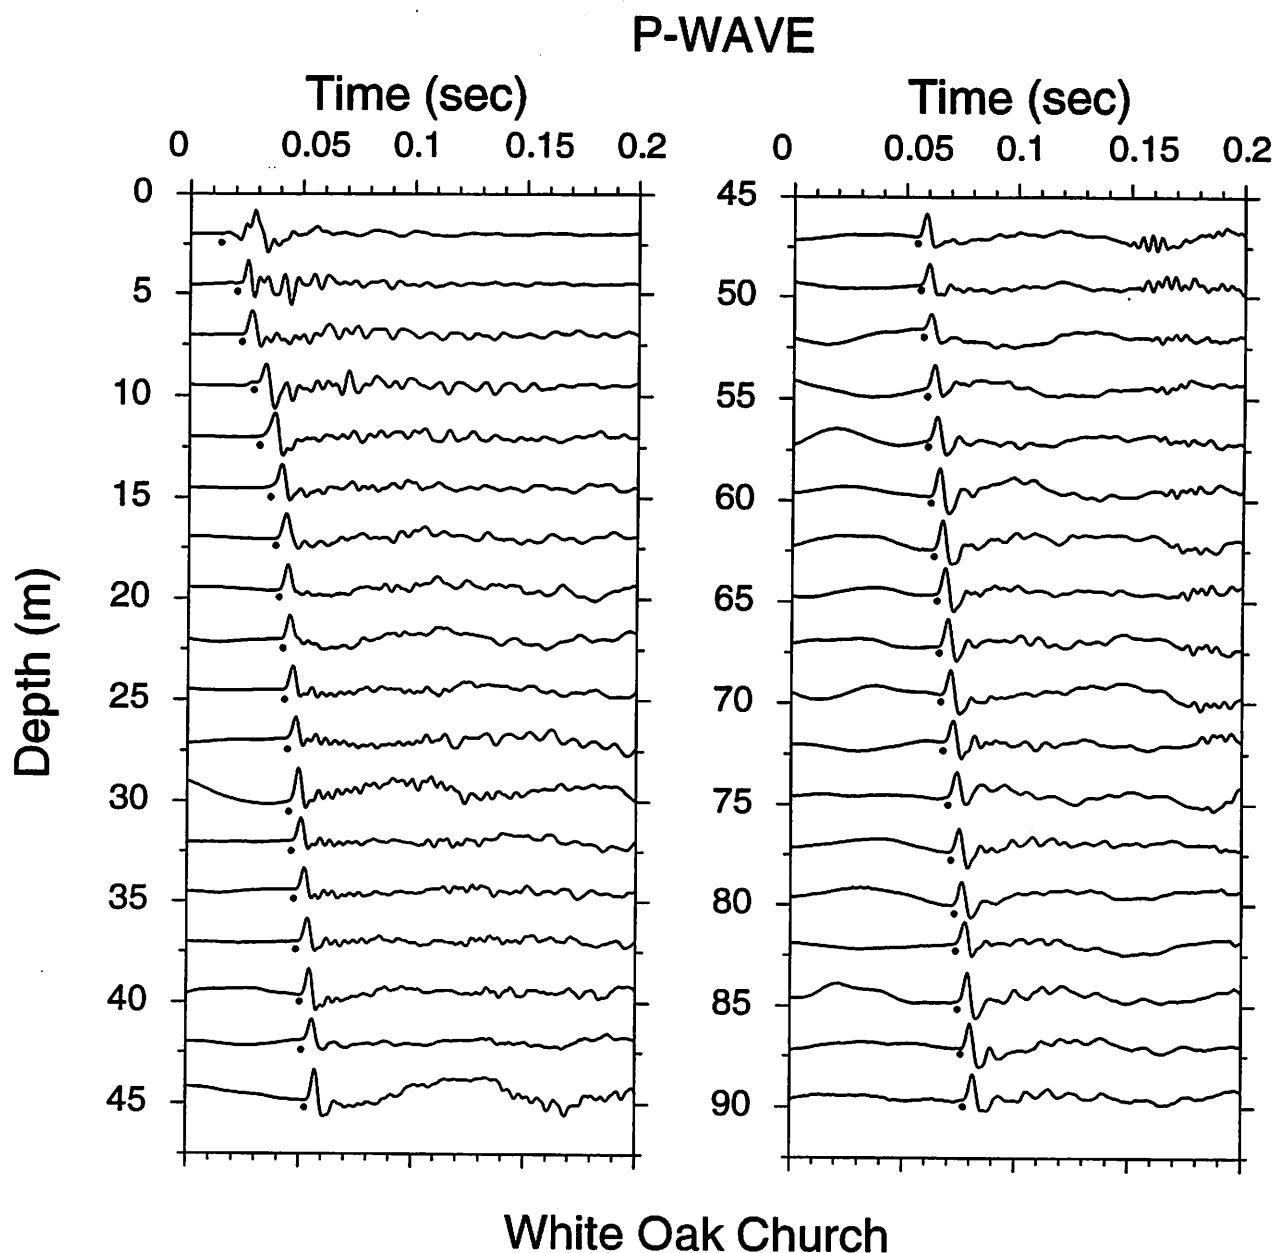


Figure A-58. Vertical component record section. P-wave arrivals are indicated by the solid circles.

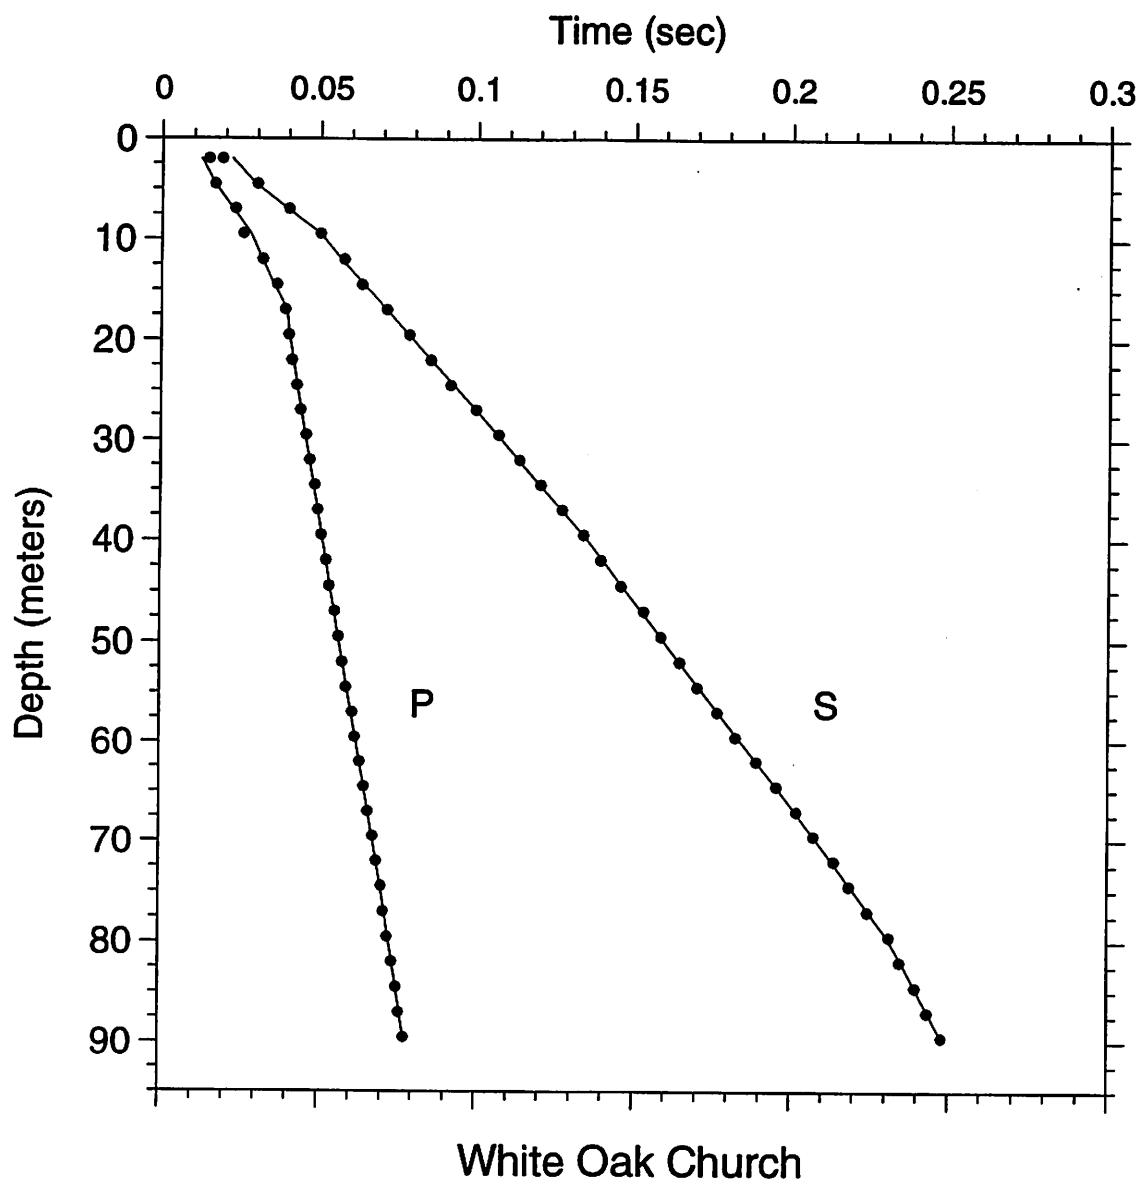


Figure A-59. Time-depth graph of P-wave and S-wave picks. Line segments show the hinged-least-squares fit to the data points.

White Oak Church (WOC)

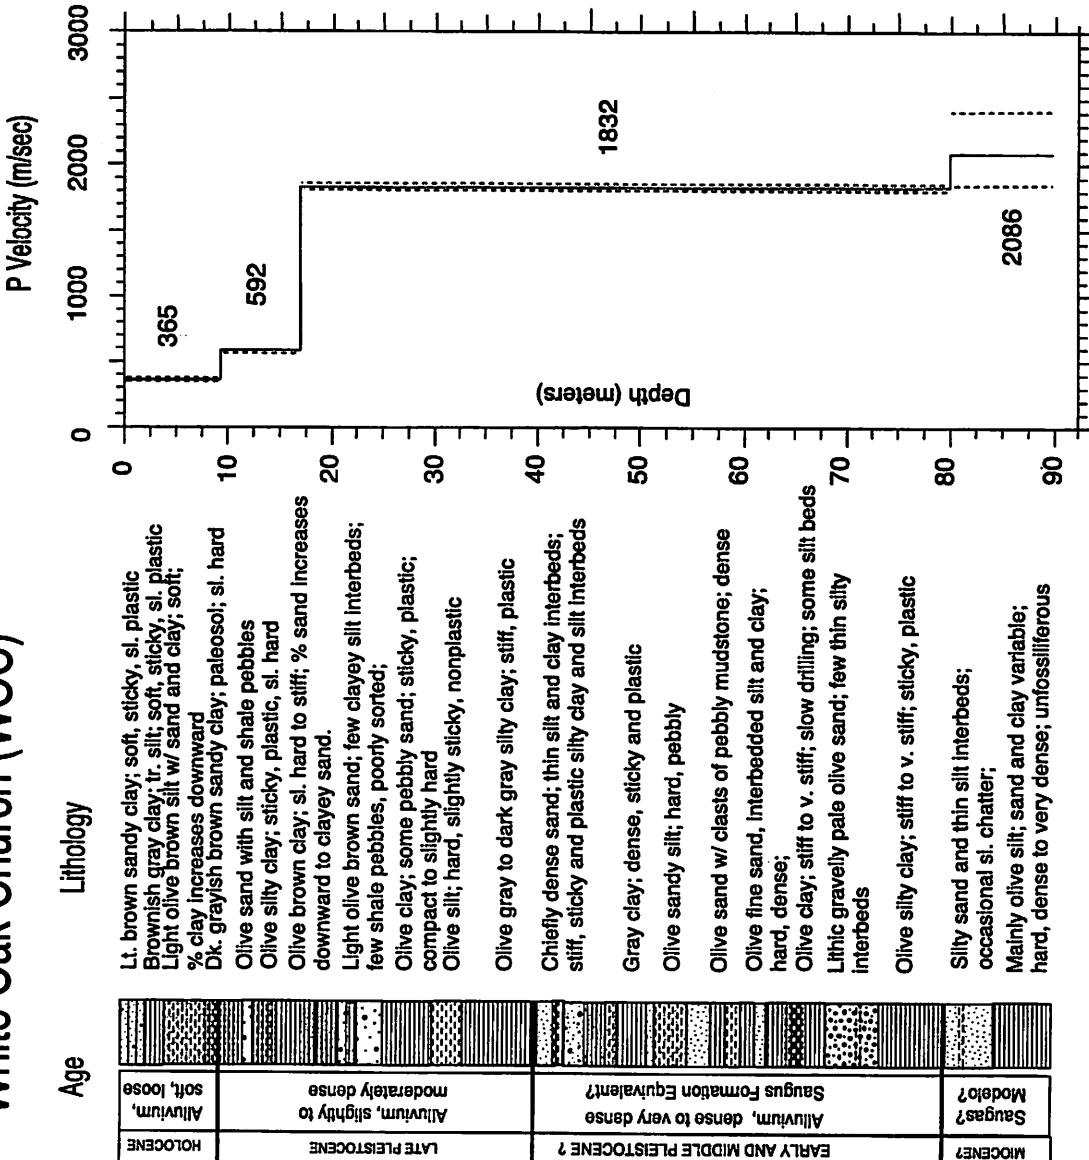
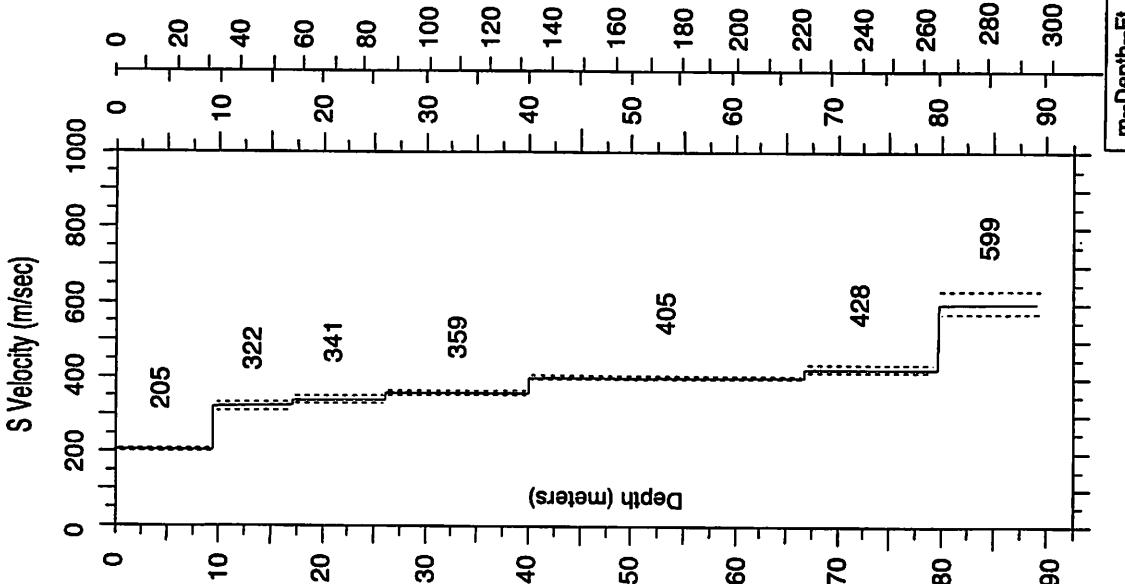


Figure A-60. S- and P-wave velocity profiles with dashed lines representing plus and minus one standard deviation.
Generalized geologic log is shown for correlation with velocities.

TABLE A-23. S-wave arrival times and velocity summaries.

Location:	White Oak Church	Coordinates:	34.20810	118.51710	Hole_Code:	268
Offset =	4.00	Travel-time file:	WOCs.tt			
d(m)	ts(s)	tvrt(s)	vavg(m/s)	sig	rsdl(sec)	
2.0	6.6	0.0188	0.0098	-0.0031	9.3	30.5
4.5	14.8	0.0300	0.0220	205	17.0	203
7.0	23.0	0.0400	0.0342	205	26.0	205
9.5	31.2	0.0500	0.0460	206	40.0	205
12.0	39.4	0.0576	0.0538	223	67.0	359
14.5	47.6	0.0632	0.0616	235	-0.0006	405
17.0	55.8	0.0712	0.0694	245	80.0	428
19.5	64.0	0.0784	0.0767	254	89.5	419
22.0	72.2	0.0852	0.0840	262	19.5	437
24.5	80.4	0.0916	0.0913	268	-0.0009	402
27.0	88.6	0.0996	0.0995	274	-0.0001	407
29.5	96.8	0.1068	0.1055	280	-0.0004	42.7
32.0	105.0	0.1136	0.1124	285	-0.0012	1964
34.5	113.2	0.1204	0.1194	289	-0.0003	1868
37.0	121.4	0.1272	0.1263	293	-0.0002	2071
39.5	129.6	0.1340	0.1333	296	-0.0001	
42.0	137.8	0.1396	0.1396	301	-0.0006	
44.5	146.0	0.1460	0.1458	305	-0.0003	
47.0	154.2	0.1532	0.1519	309	-0.0007	
49.5	162.4	0.1588	0.1581	313	-0.0002	
52.0	170.6	0.1648	0.1643	317	-0.0001	
54.5	178.8	0.1704	0.1705	320	-0.0005	
57.0	187.0	0.1768	0.1766	323	-0.0002	
59.5	195.2	0.1826	0.1828	325	-0.0006	
62.0	203.4	0.1892	0.1890	328	-0.0001	
64.5	211.6	0.1956	0.1951	331	-0.0001	
67.0	219.8	0.2020	0.2013	333	-0.0004	
69.5	228.0	0.2076	0.2071	336	0.0001	
72.0	236.2	0.2140	0.2130	338	-0.0007	
74.5	244.4	0.2188	0.2188	340	-0.0003	
77.0	252.6	0.2246	0.2247	343	-0.0004	
79.5	260.8	0.2314	0.2305	345	0.0006	
82.0	269.0	0.2348	0.2350	349	-0.0005	
84.5	277.2	0.2396	0.2392	353	0.0001	
87.0	285.4	0.2434	0.2434	357	-0.0002	
89.5	293.6	0.2480	0.2476	362	1	-0.0002

Explanation:
 d(m) = depth in meters
 dtb(ft) = depth in feet
 ts(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.

tvrt(s) = vertical travel time computed from the model
 vavg(m/s) = average velocity from the surface to each depth, computed as avg vel = d(m)/tvrt(s)
 sig = sigma, standard deviation normalized to the standard deviation of best picks
 rsdl(sec) = residual (observed - fitted travel time), in secs
 dtb(m) = depth to bottom of layer in meters
 thk(m) = thickness of layer in meters
 v(m/s) = velocity of layer in meters per second
 vil(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
 vu(m/s) = upper limit of velocity in meters per second
 dtb(ft) = depth to bottom of layer in feet
 thk(ft) = thickness of layer in feet
 vil(ft/s) = velocity of layer in feet per second
 vil(ft/s) = lower limit of velocity in feet per second
 vu(ft/s) = upper limit of velocity in feet per second

TABLE A-24. P-Wave arrival times and velocity summaries.

Location:	White Oak Church	Coordinates:	34.20810	118.51710	Hole_Code:	268				
offset =	4.00	travel-time file:	wocp_re.tt		layers =	4				
d(m)	tsl(s)	tvrt(s)	vavg(m/s)	rsdl(sec)	dtb(ft)	thk(ft)	v(ft/s)	vl(ft/s)	vu(ft/s)	
2.0	6.6	0.0146	0.0055	365	9.3	365	360	30.5	119	118
4.5	14.8	0.0166	0.0123	365	1	0.0001	17.0	7.7	592	614
7.0	23.0	0.0230	0.0192	365	1	0.0009	80.0	63.0	1832	1855
9.5	31.2	0.0256	0.0258	368	1	-0.0024	89.5	9.5	1811	262.5
12.0	39.4	0.0318	0.0300	400	1	0.0002	2086	1843	2402	293.6
14.5	47.6	0.0364	0.0342	423	1	0.0010				31.2
17.0	55.8	0.0390	0.0385	442	1	-0.0005				
19.5	64.0	0.0402	0.0398	490	1	-0.0005				
22.0	72.2	0.0412	0.0412	534	1	-0.0005				
24.5	80.4	0.0428	0.0426	576	1	-0.0001				
27.0	88.6	0.0440	0.0439	615	1	-0.0002				
29.5	96.8	0.0458	0.0453	651	1	0.0003				
32.0	105.0	0.0470	0.0467	686	1	0.0001				
34.5	113.2	0.0486	0.0480	718	1	0.0004				
37.0	121.4	0.0496	0.0494	749	1	0.0000				
39.5	129.6	0.0508	0.0507	778	1	-0.0001				
42.0	137.8	0.0524	0.0521	806	1	-0.0001				
44.5	146.0	0.0534	0.0535	832	1	-0.0002				
47.0	154.2	0.0552	0.0548	857	1	0.0002				
49.5	162.4	0.0564	0.0562	881	1	0.0001				
52.0	170.6	0.0576	0.0576	903	1	-0.0001				
54.5	178.8	0.0588	0.0589	925	1	-0.0002				
57.0	187.0	0.0608	0.0603	945	1	0.0004				
59.5	195.2	0.0616	0.0617	965	1	-0.0002				
62.0	203.4	0.0632	0.0630	984	1	0.0001				
64.5	211.6	0.0646	0.0644	1002	1	0.0001				
67.0	219.8	0.0658	0.0658	1019	1	0.0000				
69.5	228.0	0.0674	0.0671	1036	1	0.0002				
72.0	236.2	0.0686	0.0685	1051	1	0.0000				
74.5	244.4	0.0702	0.0698	1067	1	0.0003				
77.0	252.6	0.0710	0.0712	1081	1	-0.0003				
79.5	260.8	0.0722	0.0726	1095	1	-0.0004				
82.0	269.0	0.0738	0.0738	1111	1	-0.0001				
84.5	277.2	0.0752	0.0750	1127	1	0.0001				
87.0	285.4	0.0760	0.0762	1142	1	-0.0003				
89.5	293.6	0.0776	0.0774	1156	1	0.0001				

Explanation:
d(m) = depth in meters
d(ft) = depth in feet
tsl(s) = observed arrival time in seconds (from source to receiver along a slant path). For the arrival times used in the S-wave model, the times are the average of picks from traces obtained from hammer blows differing in direction by 180 degrees.
tvrt(s) = vertical travel time computed from the model vavg(m/s) = average velocity from the surface to each depth, computed as avg_vel = d(m)/tvrt(s)
sig = sigma, standard deviation normalized to the standard deviation of best picks
rsdl(sec) = residual (observed - fitted travel time), in secs
dtb(m) = depth to bottom of layer in meters
thk(m) = thickness of layer in meters
v(m/s) = velocity of layer in meters per second
vl(m/s) = lower limit of velocity in meters per second (see text for explanation of velocity limits)
vu(m/s) = upper limit of velocity in meters per second
dtb(ft) = depth to bottom of layer in feet
thk(ft) = thickness of layer in feet
vf(ft/s) = velocity of layer in feet per second
vl(ft/s) = lower limit of velocity in feet per second
vu(ft/s) = upper limit of velocity in feet per second

APPENDIX—B
Poisson's Ratios

TABLE B-1. Poisson's ratios for the velocity models at the Epiphany Lutheran Church site.

P	wave - d2bot ,	pvel , for	file:	elcp_sl.vel	svel	psnrat
6.40000	331.000				2.080E-02	0.17
15.0000	649.000				6.490E+02	0.40
70.0000	1777.00				2.690E+02	0.49
83.5000	2050.00				1.777E+03	0.48
S	wave - d2bot ,	svel , for	file:	elcs_sl.vel	svel	psnrat
6.40000	208.000				3.310E+02	
21.0000	269.000				1.777E+03	
40.0000	332.000				3.320E+02	
50.0000	351.000				1.777E+03	
60.0000	378.000				3.510E+02	
70.0000	517.000				1.777E+03	
83.5000	579.000				1.777E+03	
d2bot	d2bot	s	d2bot	s	thick	
6.400E+00	6.400E+00		6.400E+00		3.310E+02	
1.500E+01	2.000E+01		8.600E+00		2.080E-02	
7.000E+01	2.100E+01		6.000E+01		6.490E+02	
7.000E+01	4.000E+01		1.900E+01		2.690E+02	
7.000E+01	5.000E+01		1.000E+01		1.777E+03	
7.000E+01	6.000E+01		6.000E+01		3.320E+02	
7.000E+01	7.000E+01		7.000E+01		1.777E+03	
8.350E+01	8.350E+01		8.350E+01		3.510E+02	

TABLE B-2. Poisson's ratios for the velocity models at the Jensen Generator Building site.

P Wave - d2bot, pvel, for file:	jgbp_st.vel	S Wave - d2bot, svel, for file:	jgbs_st.vel	d2bot P	d2bot s	d2bot	thick	pvel	svel	pssnrat
2.00000	706.000			2.000E+00	2.000E+00	2.000E+00	7.060E-02	3.570E-02	3.570E-02	0.33
7.00000	534.000			7.000E+00	7.000E+00	5.000E+00	5.340E-02	3.620E-02	3.620E-02	0.07
17.00000	1042.00			1.700E+01	2.400E+01	1.700E+01	1.000E-01	1.042E-03	6.150E-02	0.23
89.5000	2150.00			8.950E+01	2.400E+01	2.400E+01	7.000E+00	2.150E+03	6.150E+02	0.46
				8.950E+01	3.800E+01	3.800E+01	1.400E+01	2.150E+03	6.000E+02	0.46
				8.950E+01	6.500E+01	6.500E+01	2.700E+01	2.150E+03	7.260E+02	0.44
				8.950E+01	8.950E+01	8.950E+01	2.450E+01	2.150E+03	7.700E+02	0.43

TABLE B-3. Poisson's ratios for the velocity models at the Jensen Main Building site.

P wave - d2bot, pvel, for file: jmbp_sl.vel	S wave - d2bot, svel, for file: jmbs_sl.vel	d2bot, p	d2bot, s	d2bot	thick	pvel	svel	pssnrat
9.00000	298.000	9.000E+00	9.000E+00	9.000E+00	7.540E+02	2.980E+02	0.41	
15.00000	256.000	1.500E+01	1.500E+01	6.000E+01	5.220E+02	2.560E+02	0.34	
23.00000	236.000	2.300E+01	2.300E+01	8.000E+01	9.020E+02	5.640E+02	0.18	
35.00000	2215.00	3.500E+01	3.500E+01	1.200E+01	2.215E+03	5.560E+02	0.47	
63.00000	1978.00	6.300E+01	6.300E+01	2.800E+01	1.978E+03	5.560E+02	0.46	
89.50000	2136.00	8.950E+01	8.950E+01	2.650E+01	2.134E+03	6.840E+02	0.44	

TABLE B-4. Poisson's ratios for the velocity models at the Knolls Elementary School site.

P Wave - d2bot, pvel, for file: ksp_st.vel	d2bot	s	d2bot	thick	pvel	svel	pssnrat
2.00000	525.000		2.000E+00	2.000E+00	5.250E+02	3.070E+02	0.24
6.00000	602.000		6.000E+00	6.000E+00	6.020E+02	3.480E+02	0.25
15.00000	5373.00		7.300E+00	7.300E+00	5.375E+03	3.480E+02	0.50
40.00000	2562.00		1.280E+01	1.280E+01	5.500E+00	5.373E+03	1.40E+02
67.00000	3114.00		2.700E+01	1.500E+01	2.200E+00	5.373E+03	1.180E+03
2.00000	307.000		3.350E+01	2.700E+01	1.200E+01	2.562E+03	0.37
7.30000	348.000		5.500E+01	4.000E+01	6.500E+00	2.562E+03	1.202E+03
12.80000	314.000		5.500E+01	4.000E+01	6.500E+00	2.562E+03	0.76
27.00000	1180.00		6.700E+01	5.500E+01	1.500E+01	1.14E+03	1.497E+03
33.50000	1202.00		6.700E+01	5.500E+01	1.500E+01	1.14E+03	0.35
55.00000	1497.00		6.700E+01	5.500E+01	1.500E+01	1.14E+03	1.497E+03
67.50000	1222.00		6.700E+01	6.750E+01	1.200E+01	1.222E+03	0.41

TABLE B-5. Poisson's ratios for the velocity models at the Los Angeles Dam site.

P Wave - d2bot, pvel, for file: ladp_st.vel	S Wave - d2bot, svel, for file: lads_st.vel	d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
7.60000	577.000	7.600E+00	7.600E+00	7.600E+00	8.980E-01	5.770E-02	5.770E-02	0.15
12.00000	633.000	2.500E-01	1.200E-01	4.400E-01	1.239E-03	6.330E-02	6.330E-02	0.32
20.00000	713.000	2.500E+01	2.000E+01	8.000E+00	1.705E-03	6.330E-02	6.330E-02	0.42
25.00000	799.000	2.500E-01	2.500E-01	5.000E+00	2.413E-03	6.330E-02	6.330E-02	0.46
88.50000		4.250E+01	4.250E+01	1.750E+01	2.313E-03	7.130E-02	7.130E-02	0.45
		8.850E+01	8.850E+01	4.600E+01	2.313E-03	7.990E-02	7.990E-02	0.43

TABLE B-6. Poisson's ratios for the velocity models at the Olive View Hospital site.

P wave - d2bot, pvel, for file:	ovh2p_st.vel	S wave - d2bot, svel, for file:	ovh2s_st.vel	d2bot_P	d2bot_S	d2bot	thick	pvel	svel	pssnrat
2.00000	423.000			2.000E+00	2.000E+00	2.000E+00	4.230E+02	2.430E+02	2.430E+02	0.25
6.00000	539.000			6.000E+00	6.000E+00	4.000E+00	5.390E+02	3.390E+02	3.390E+02	0.20
12.00000	831.000			1.200E+01	1.200E+01	6.000E+00	8.310E+02	4.720E+02	4.720E+02	0.26
24.00000	1516.000			2.400E+01	2.400E+01	1.200E+01	1.516E+03	4.900E+02	4.900E+02	0.44
89.50000	2031.000			5.500E+01	5.500E+01	3.100E+01	2.031E+03	5.690E+02	5.690E+02	0.46
				8.950E+01	8.000E+01	2.500E+01	2.031E+03	6.120E+02	6.120E+02	0.45
				8.950E+01	8.950E+01	9.500E+01	2.031E+03	9.380E+02	9.380E+02	0.36

TABLE B-7. Poisson's ratios for the velocity models at the Rinaldi Receiving Station site.

P wave - d2bot, pvel, for file: rimp_st.vel	S wave - d2bot, svel, for file: rins_st.vel	d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
4.500000	4.500000	4.500E+00	4.500E+00	4.500E+00	4.500E+00	2.720E+02	1.720E+02	0.17
7.000000	12.800000	1.280E+01	7.000E+00	2.500E+00	7.720E+02	2.940E+02	0.42	
79.50000	21.300000	1.280E+01	1.280E+01	5.800E+00	1.971E+03	2.940E+02	0.49	
40.00000	40.00000	2.130E+01	2.130E+01	8.500E+00	1.971E+03	4.660E+02	0.47	
73.30000	539.00000	7.330E+01	7.330E+01	1.870E+01	1.971E+03	4.970E+02	0.47	
79.50000	814.00000	7.950E+01	7.950E+01	3.330E+01	1.971E+03	5.390E+02	0.46	
				6.200E+00	1.971E+03	8.140E+02	0.40	

TABLE B-8. Poisson's ratios for the velocity models at the Sepulveda V.A. Hospital site.

P Wave - d2bot, pvel, for file: svap_st.vel	S Wave - d2bot, svel, for file: svav_st.vel	d2bot_p	d2bot_s	d2bot	thick	pvel	svel	pssnrat
24.0000	354.000	2.400E+01	2.000E+00	2.000E+00	2.000E+00	5.850E+02	3.540E+02	0.21
24.0000	354.000	2.400E+01	8.000E+00	8.000E+00	6.000E+00	5.850E+02	2.780E+02	0.35
32.0000	354.000	2.400E+01	2.400E+01	2.400E+01	1.600E+01	5.850E+02	2.710E+02	0.35
60.0000	354.000	2.400E+01	4.000E+01	3.200E+01	8.000E+00	5.850E+02	3.710E+02	0.16
74.5000	354.000	2.400E+01	6.000E+01	4.000E+01	8.000E+00	5.850E+02	5.070E+02	0.23
		3.200E+01	4.000E+01	3.200E+01	8.000E+00	8.610E+02	5.076E+03	0.35
		6.000E+01	4.000E+01	4.000E+01	8.000E+00	1.057E+03	5.070E+02	0.43
		6.000E+01	4.700E+01	4.700E+01	7.000E+00	1.057E+03	3.780E+02	0.43
		6.000E+01	6.000E+01	6.000E+01	1.300E+01	1.057E+03	5.200E+02	0.34
		7.450E+01	7.450E+01	7.450E+01	1.450E+01	1.251E+03	5.690E+02	0.37

TABLE B-9. Poisson's ratios for the velocity models at the Sherman Oaks Park site.

P wave - d2bot, pvel, for file: sopp_sl.vel	S wave - d2bot, svvel, for file: sops_sl.vel	d2bot, p	d2bot, s	d2bot	thick	pvel	svel	pssnrat
6.10000	6.10000	6.100E+00	6.100E+00	6.100E+00	6.100E+00	4.550E-02	2.460E-02	0.29
17.00000	17.00000	3.660E-01	3.660E-01	1.700E+01	1.090E+01	8.190E+02	3.200E+02	0.41
36.60000	36.60000	3.660E+01	3.660E+01	3.660E+01	1.960E+01	1.329E+03	3.200E+02	0.47
89.50000	89.50000	4.900E-01	4.900E-01	4.900E-01	1.240E+01	1.824E+03	4.890E+02	0.46
		6.000E+01	6.000E+01	6.000E+01	1.100E+01	1.824E+03	4.470E+02	0.47
		7.200E+01	7.200E+01	7.200E+01	1.200E+01	1.824E+03	6.030E+02	0.44
		8.950E+01	8.950E+01	8.950E+01	1.750E+01	1.824E+03	6.920E+02	0.42

TABLE B-10. Poisson's ratios for the velocity models at the Sherman Oaks Woodman site.

P Wave - d2bot, pvel, for file: sonp_sl.vel	S Wave - d2bot, svel, for file: sows_sl.vel	d2bot, p	d2bot, s	d2bot	thick	pvel	svel	pssnrat
3.00000	320.000	3.000E+00	3.000E+00	3.000E+00	3.200E+02	1.870E+02	0.24	
6.00000	446.000	6.000E+00	6.000E+00	6.000E+00	4.460E+02	1.620E+02	0.42	
89.5000	1752.00	1.100E+01	1.100E+01	1.100E+01	5.000E+00	1.752E+03	2.400E+02	0.49
		1.700E+01	1.700E+01	1.700E+01	6.000E+00	1.752E+03	2.790E+02	0.49
		2.700E+01	2.700E+01	2.700E+01	1.000E+01	1.752E+03	3.230E+02	0.48
		3.700E+01	3.700E+01	3.700E+01	1.000E+01	1.752E+03	3.490E+02	0.48
		4.800E+01	4.800E+01	4.800E+01	1.100E+01	1.752E+03	4.050E+02	0.47
		5.200E+01	5.200E+01	5.200E+01	4.000E+00	1.752E+03	3.250E+02	0.48
		7.500E+01	7.500E+01	7.500E+01	2.300E+01	1.752E+03	5.660E+02	0.44
		8.950E+01	8.950E+01	8.950E+01	1.450E+01	1.752E+03	5.820E+02	0.44

TABLE B-11. Poisson's ratios for the velocity models at the Sylmar Converter West site.

P Wave - d2bot, pvel, for file: scwp_st.vel	S Wave - d2bot, svel, for file: scws_st.vel	d2bot_P	d2bot_s	d2bot	thick	pvel	svel	pssnrat			
5.50000 336.000		5.500E+00	5.500E+00	5.500E+00	3.360E+02	2.020E+02	2.020E+02	0.22			
24.00000 2331.00		2.400E+01	7.600E+00	7.600E+00	2.100E+00	2.331E+03	2.020E+02	0.50			
48.00000 1727.00		4.800E+01	1.500E+01	1.500E+01	7.400E+00	2.331E+03	2.170E+02	0.50			
64.00000 2169.00		6.400E+01	2.400E+01	2.400E+01	9.000E+00	2.331E+03	2.780E+02	0.49			
87.00000 1828.00		8.700E+01	4.000E+01	4.000E+01	1.600E+01	1.727E+03	3.920E+02	0.47			
						8.200E+00	1.727E+03	4.900E+02	0.46		
						6.460E+01	6.460E+01	2.162E+03	5.230E+02	0.47	
						8.700E+01	8.700E+01	2.240E+01	1.828E+03	6.350E+02	0.43

TABLE B-12. Poisson's ratios for the velocity models at the White Oak Church site.

P wave - d2bot, pvel, for file: wocp_sl.vel	S wave - d2bot, svel, for file: wocs_sl.vel	d2bot_P	d2bot_S	d2bot	thick	pvel	svel	pssnrat
9.30000	365.000	9.300E+00	9.300E+00	9.300E+00	3.650E+02	2.050E+02	0.27	
17.00000	592.000	1.700E+01	1.700E+01	7.700E+00	5.520E+02	3.220E+02	0.29	
80.00000	1832.000	2.600E+01	2.600E+01	9.000E+00	1.832E+03	3.410E+02	0.48	
89.50000	2086.000	4.000E+01	4.000E+01	1.400E+01	1.832E+03	3.590E+02	0.48	
		4.000E+01	4.000E+01	6.700E+01	2.700E+01	1.832E+03	4.050E+02	0.47
		8.000E+01	8.000E+01	8.000E+01	1.300E+01	1.832E+03	4.280E+02	0.47
		8.950E+01	8.950E+01	8.950E+01	9.500E+00	2.086E+03	5.990E+02	0.46

APPENDIX—C

Comparison of velocity models from OFR 96-740 and this report

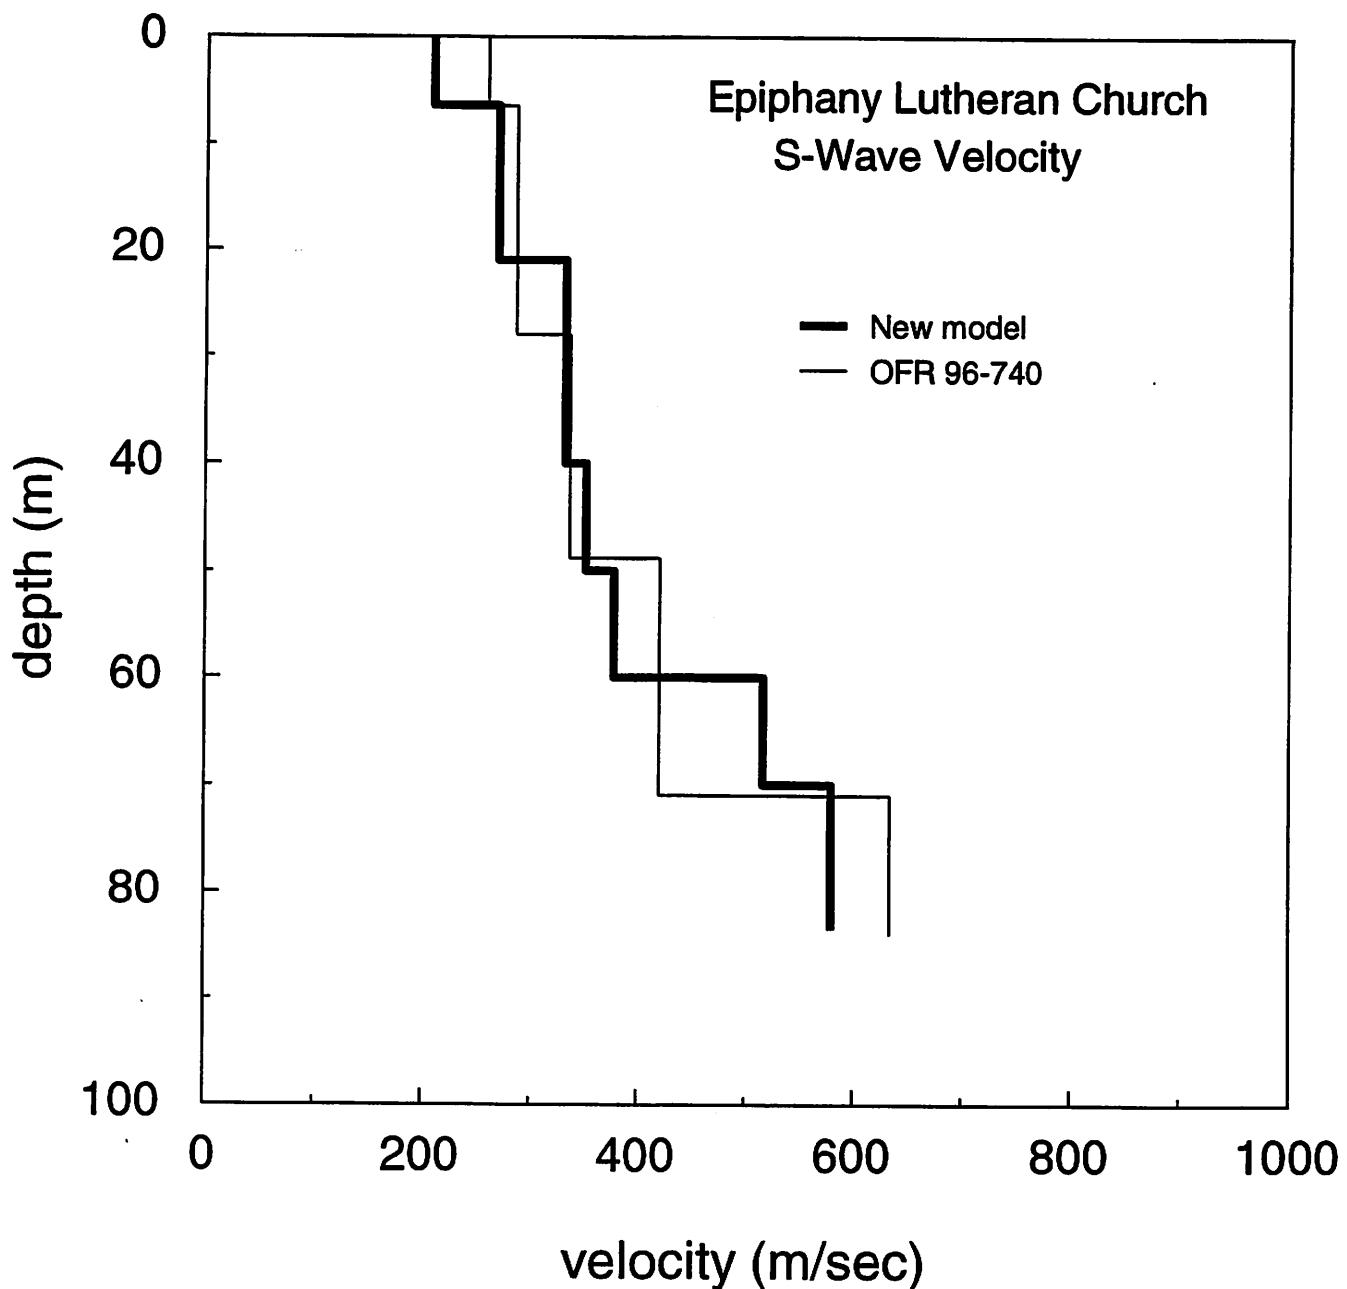


Figure C-1. Comparison of S-wave models Epiphany Lutheran Church.

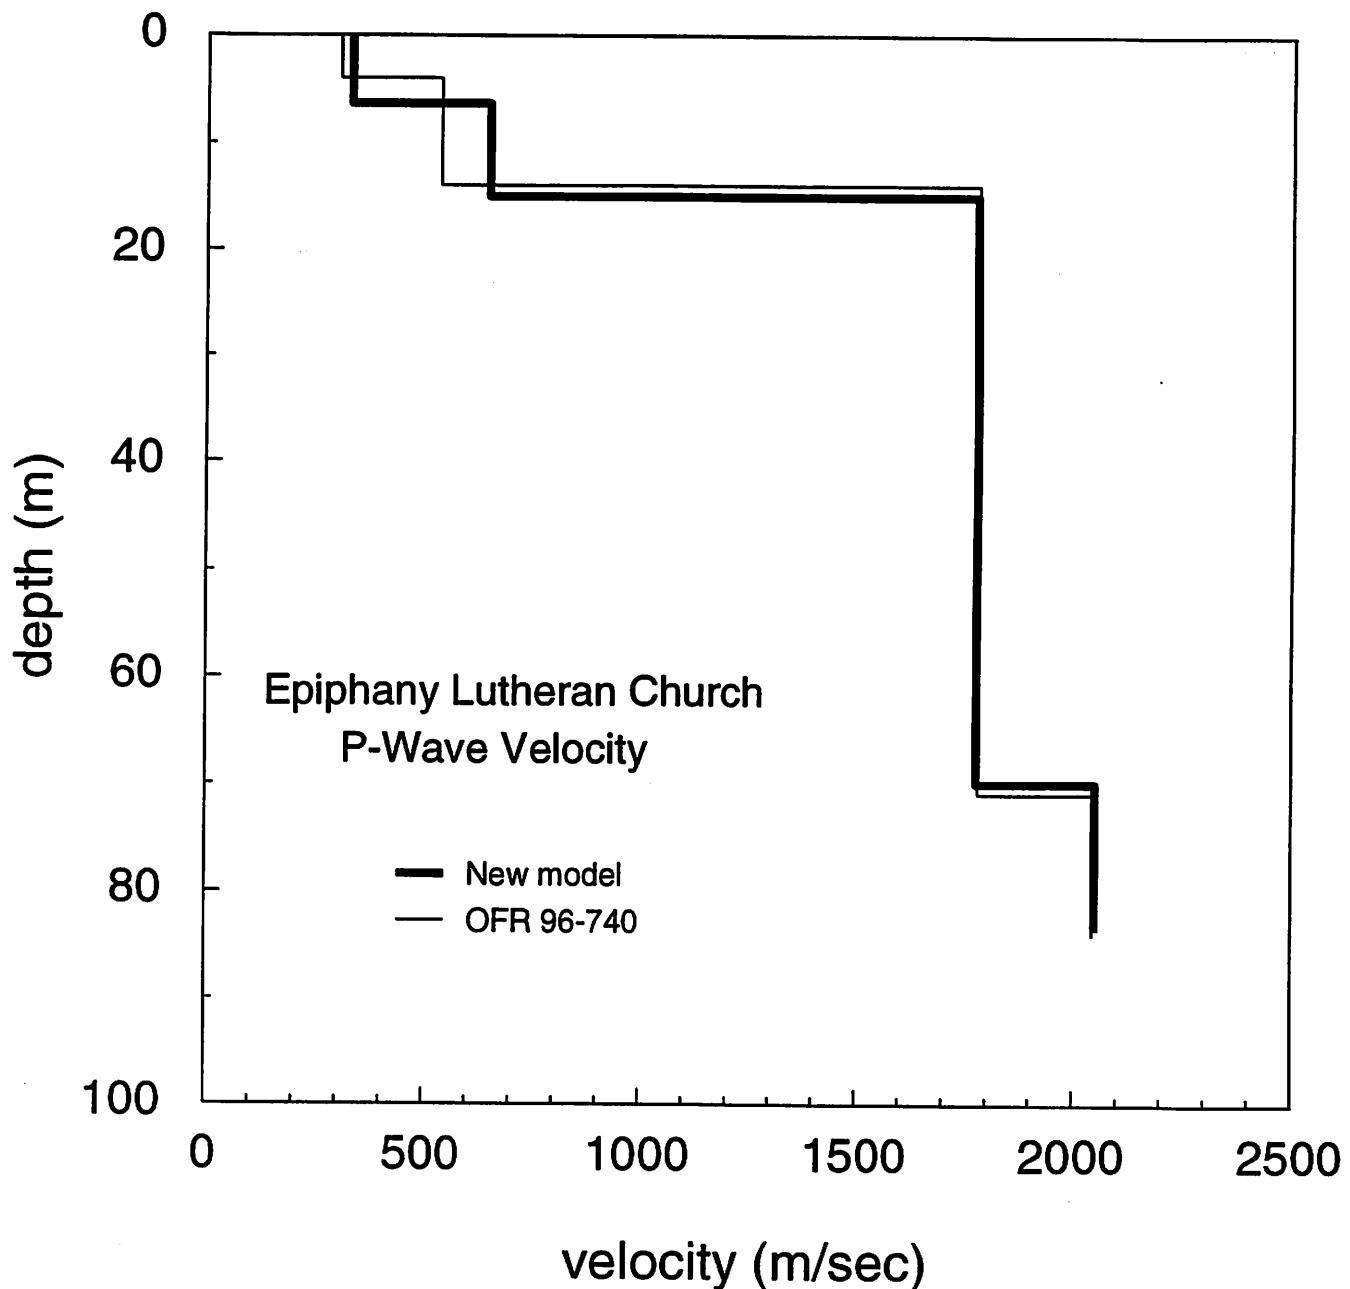


Figure C-2. Comparison of P-wave models Epiphany Lutheran Church.

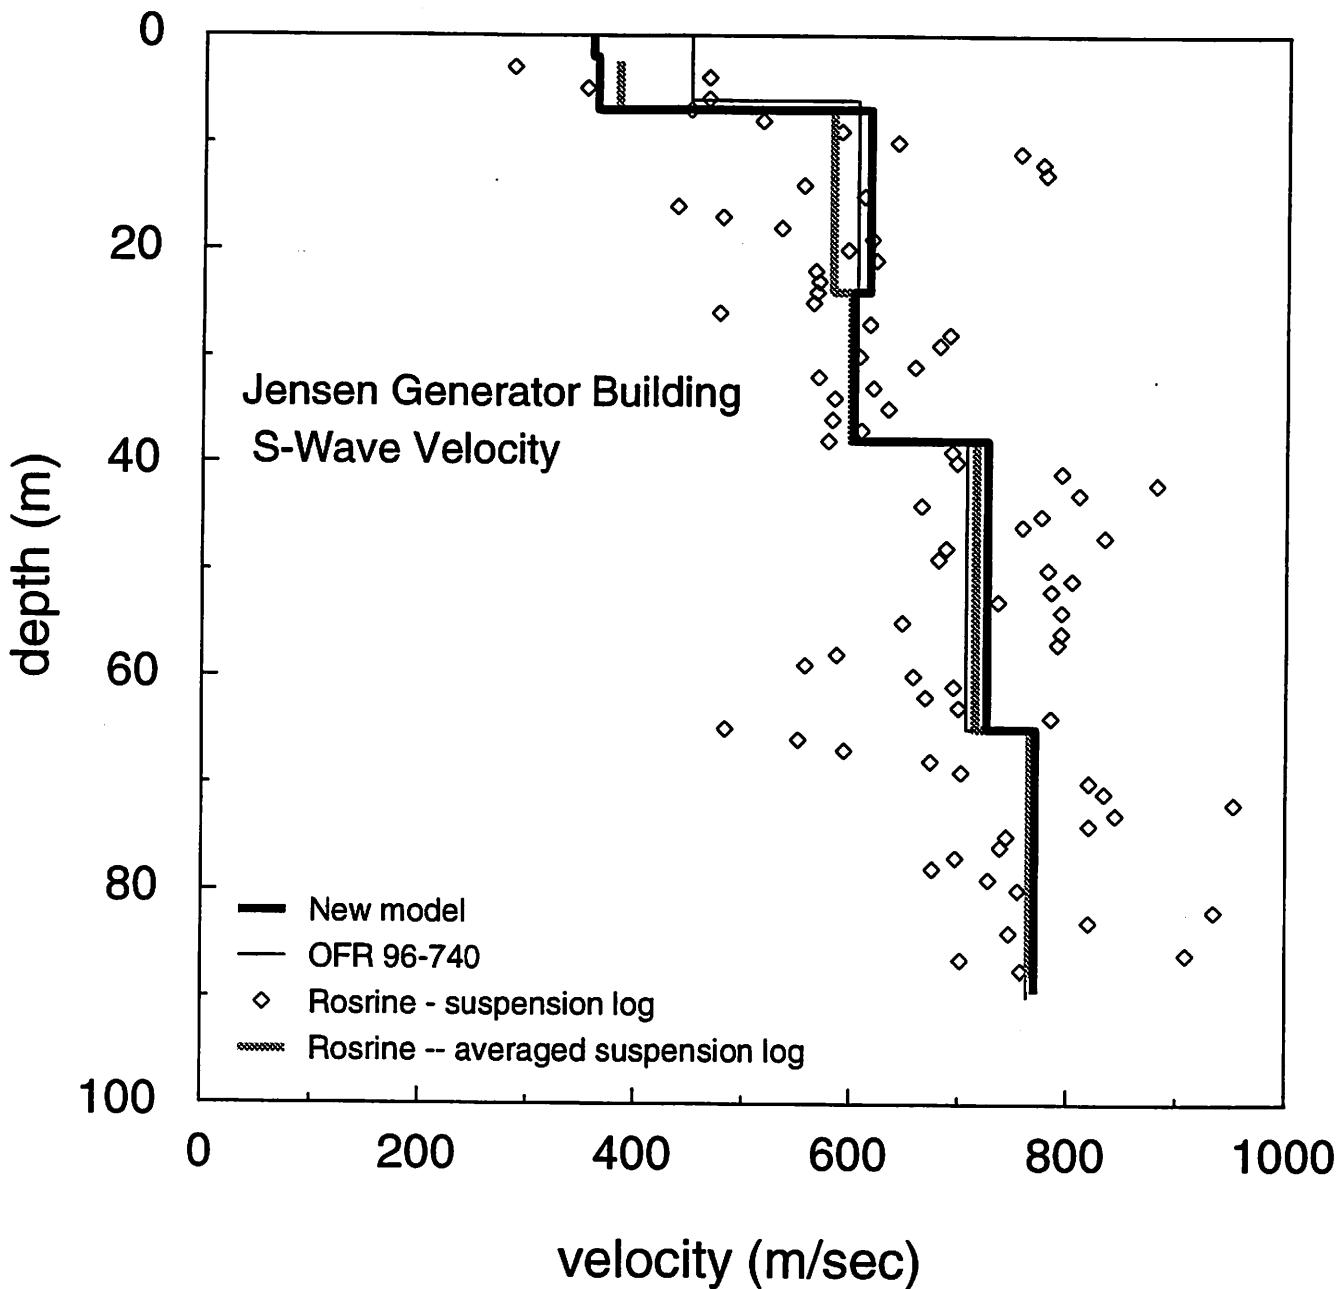


Figure C-3. Comparison of S-wave models Jensen Generator Building, and a model derived from averaging suspension data over the equivalent depth intervals of the new model.

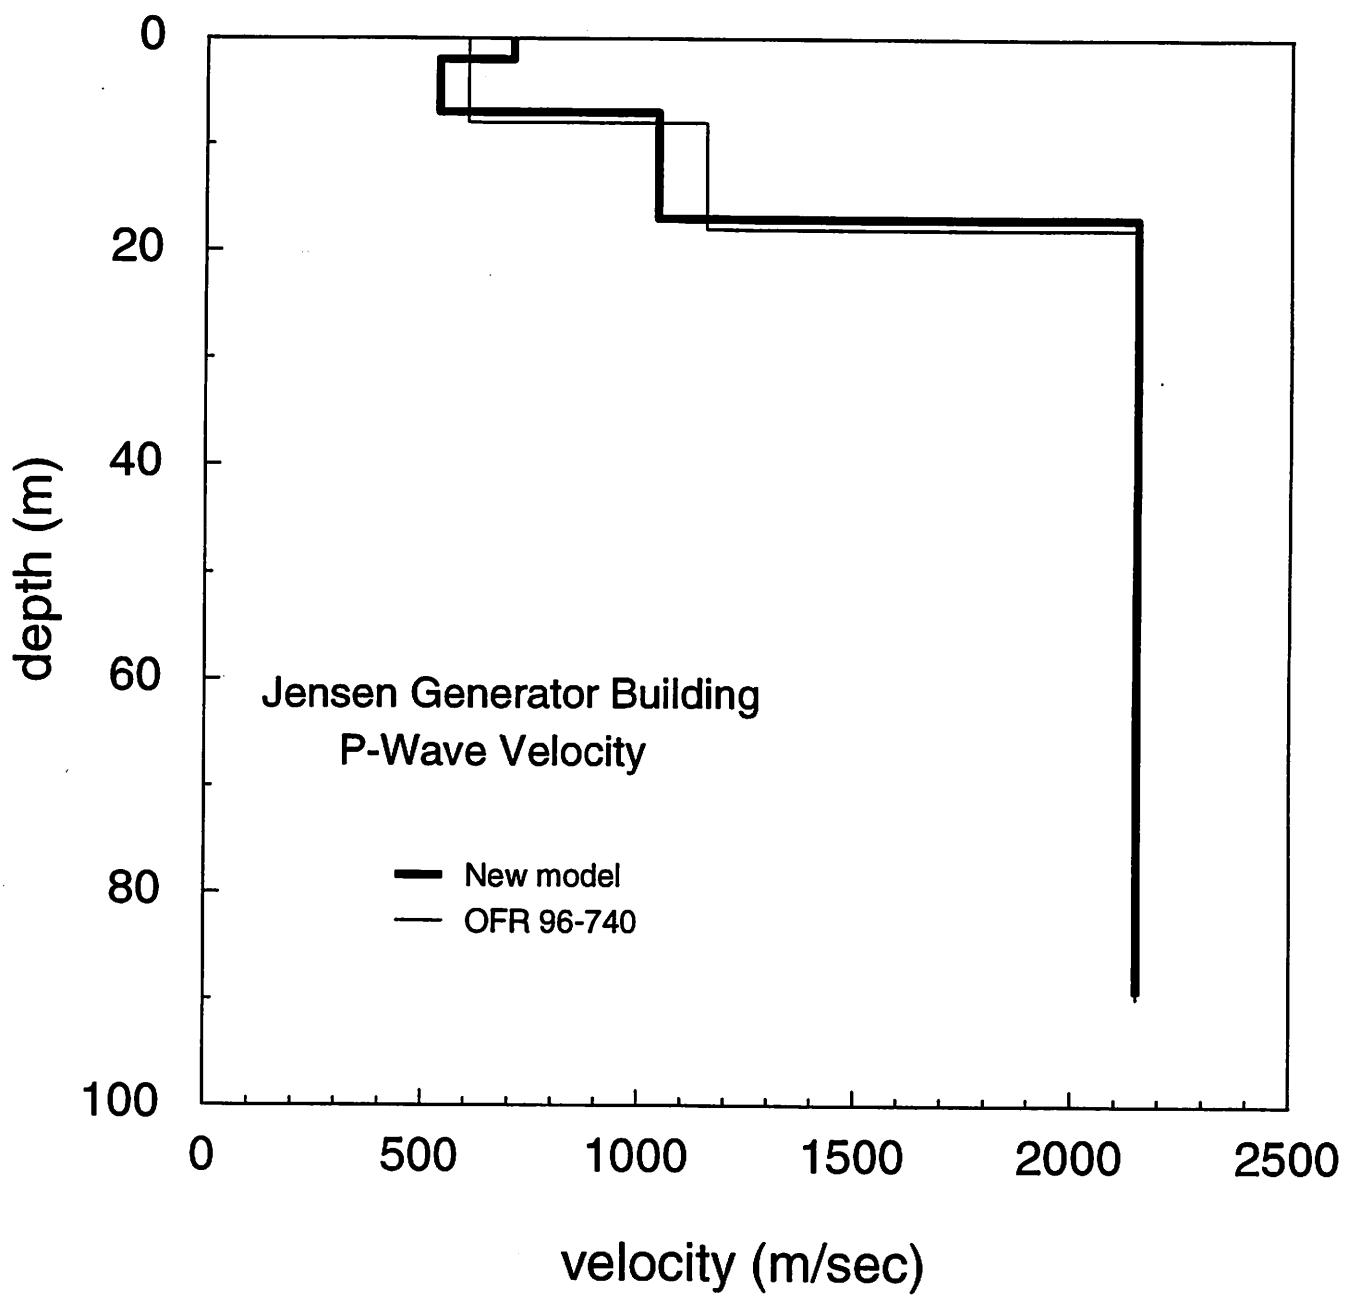


Figure C-4. Comparison of P-wave models Jensen Generator Building.

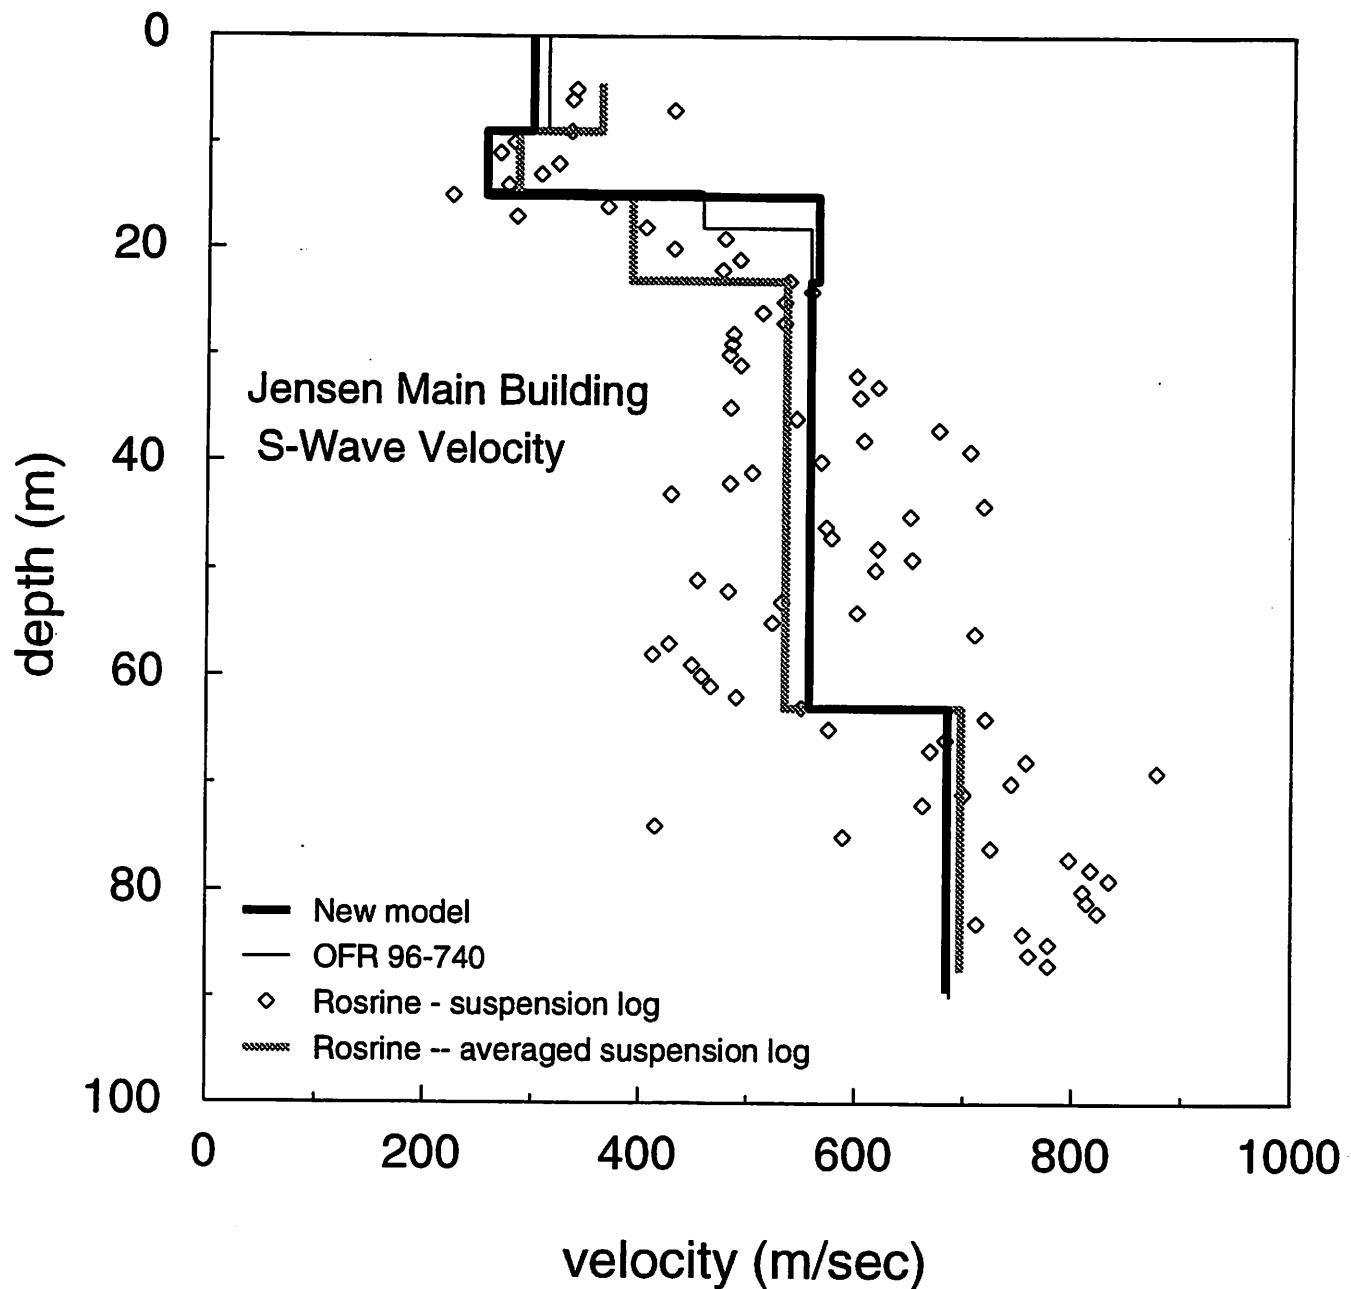


Figure C-5. Comparison of S-wave models Jensen Main Building, and a model derived from averaging suspension data over the equivalent depth intervals of the new model.

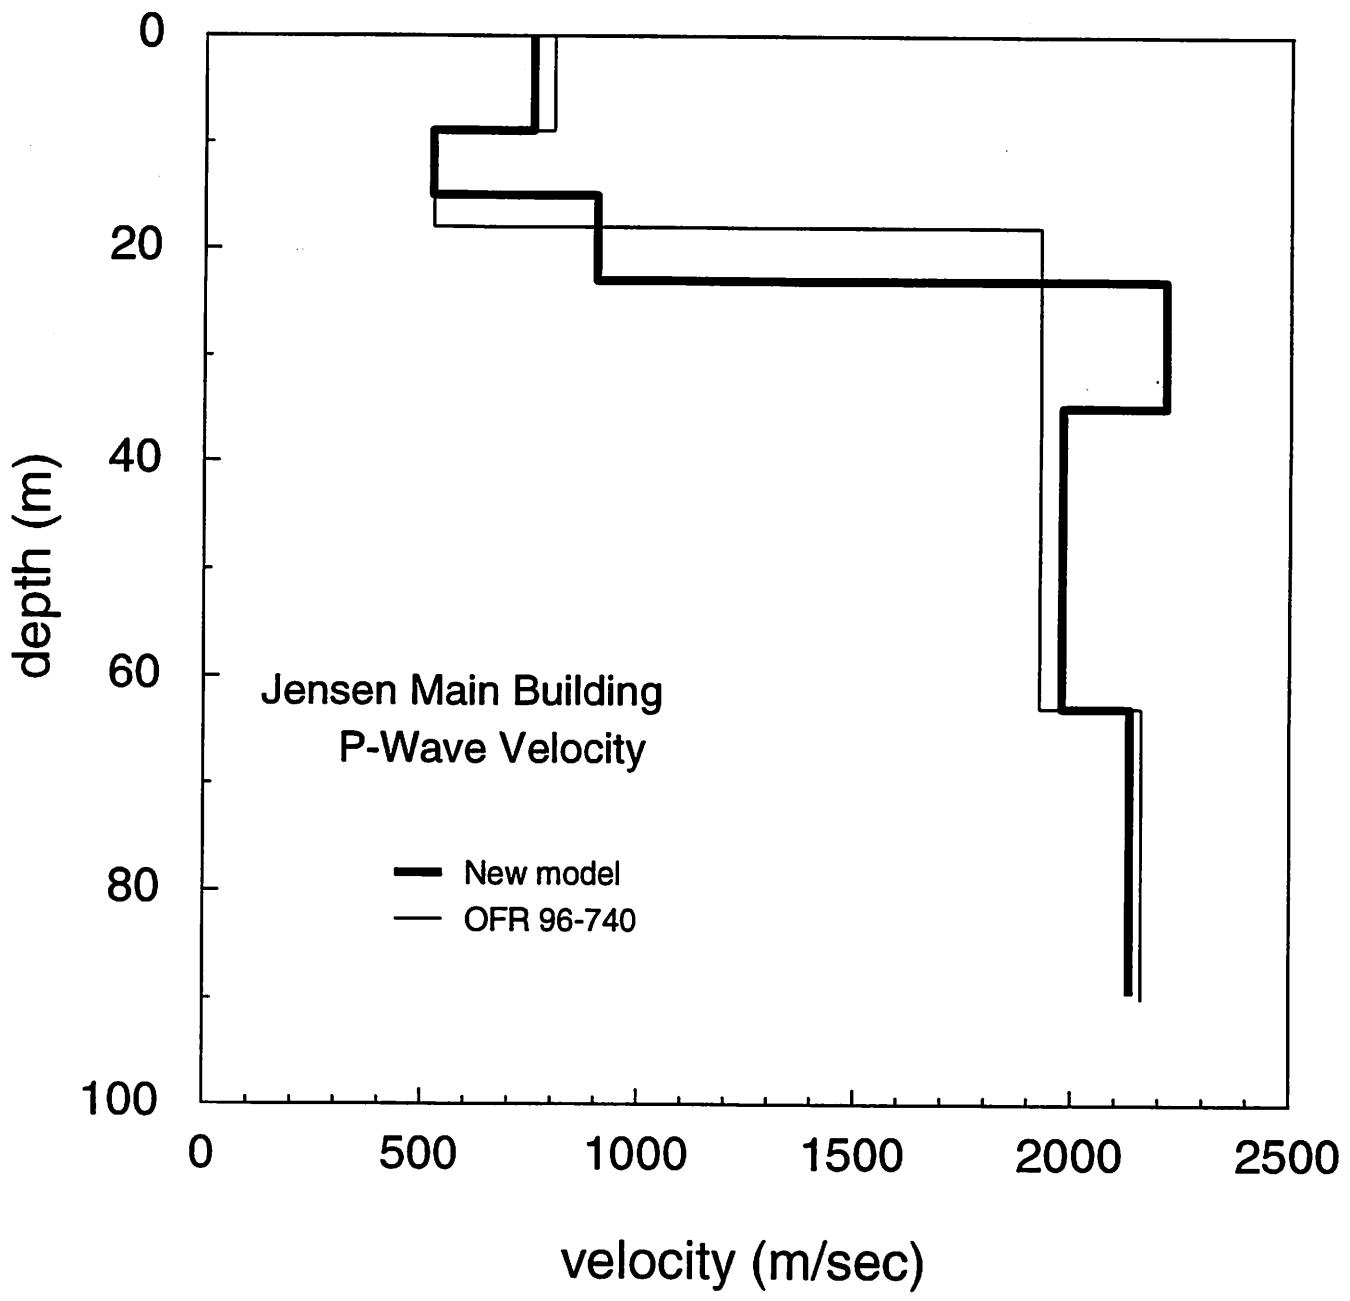


Figure C-6. Comparison of P-wave models Jensen Main Building.

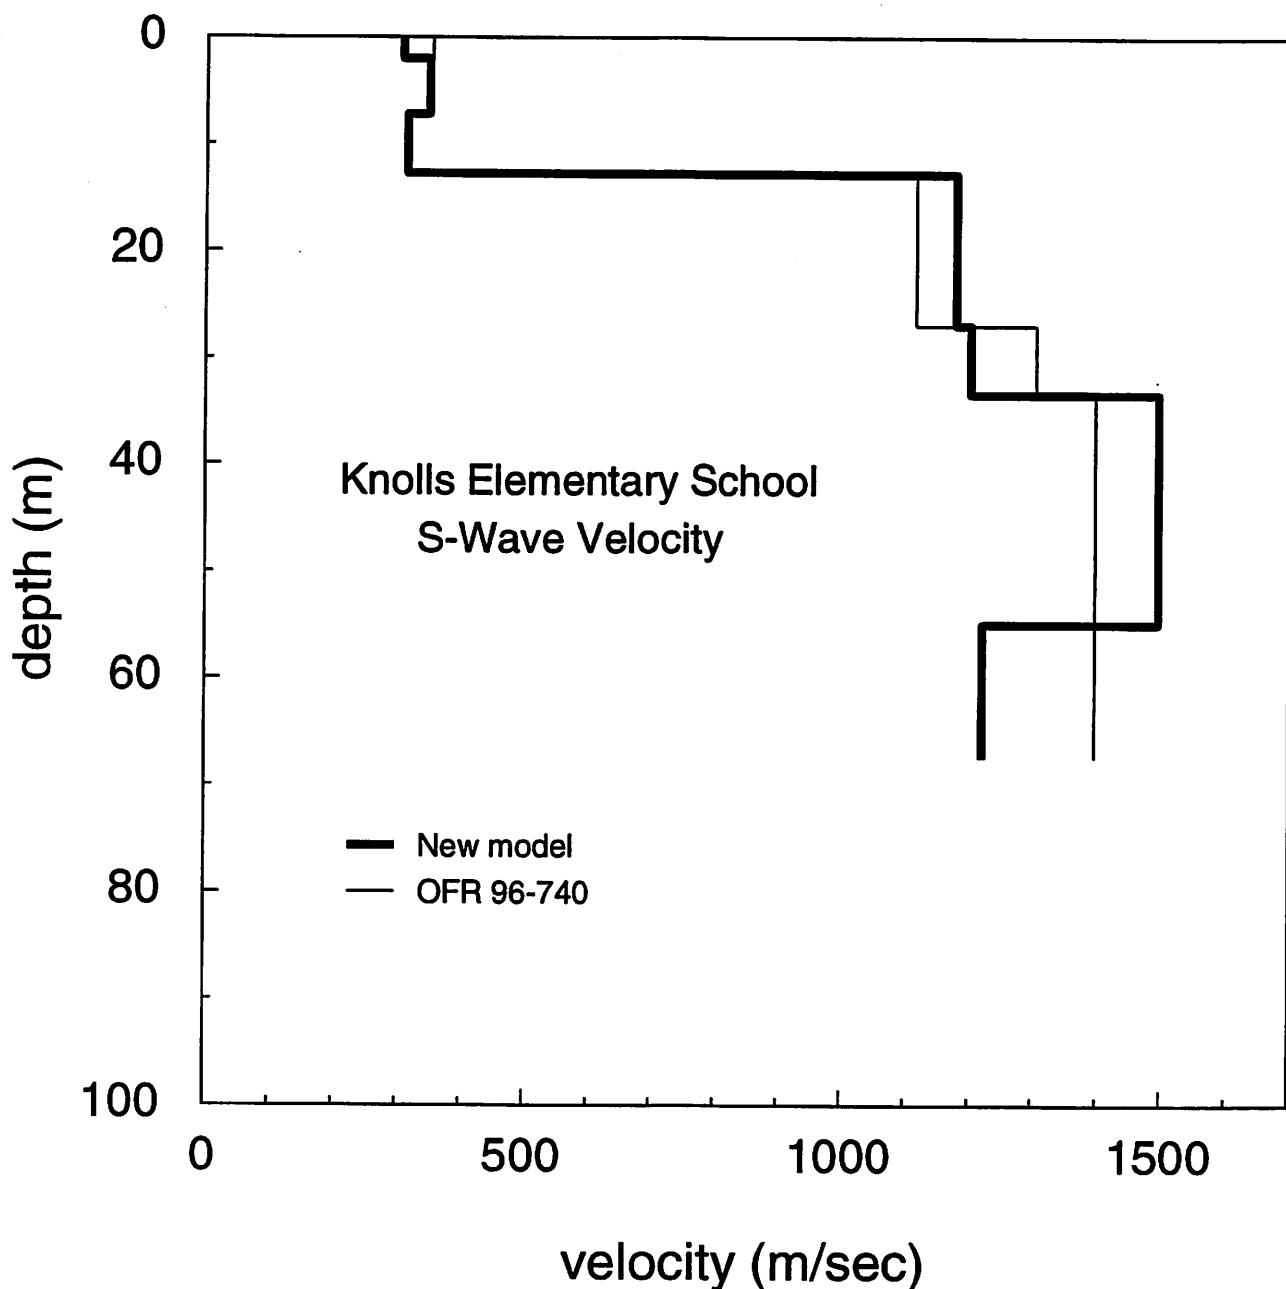


Figure C-7. Comparison of S-wave models Knolls Elementary School.

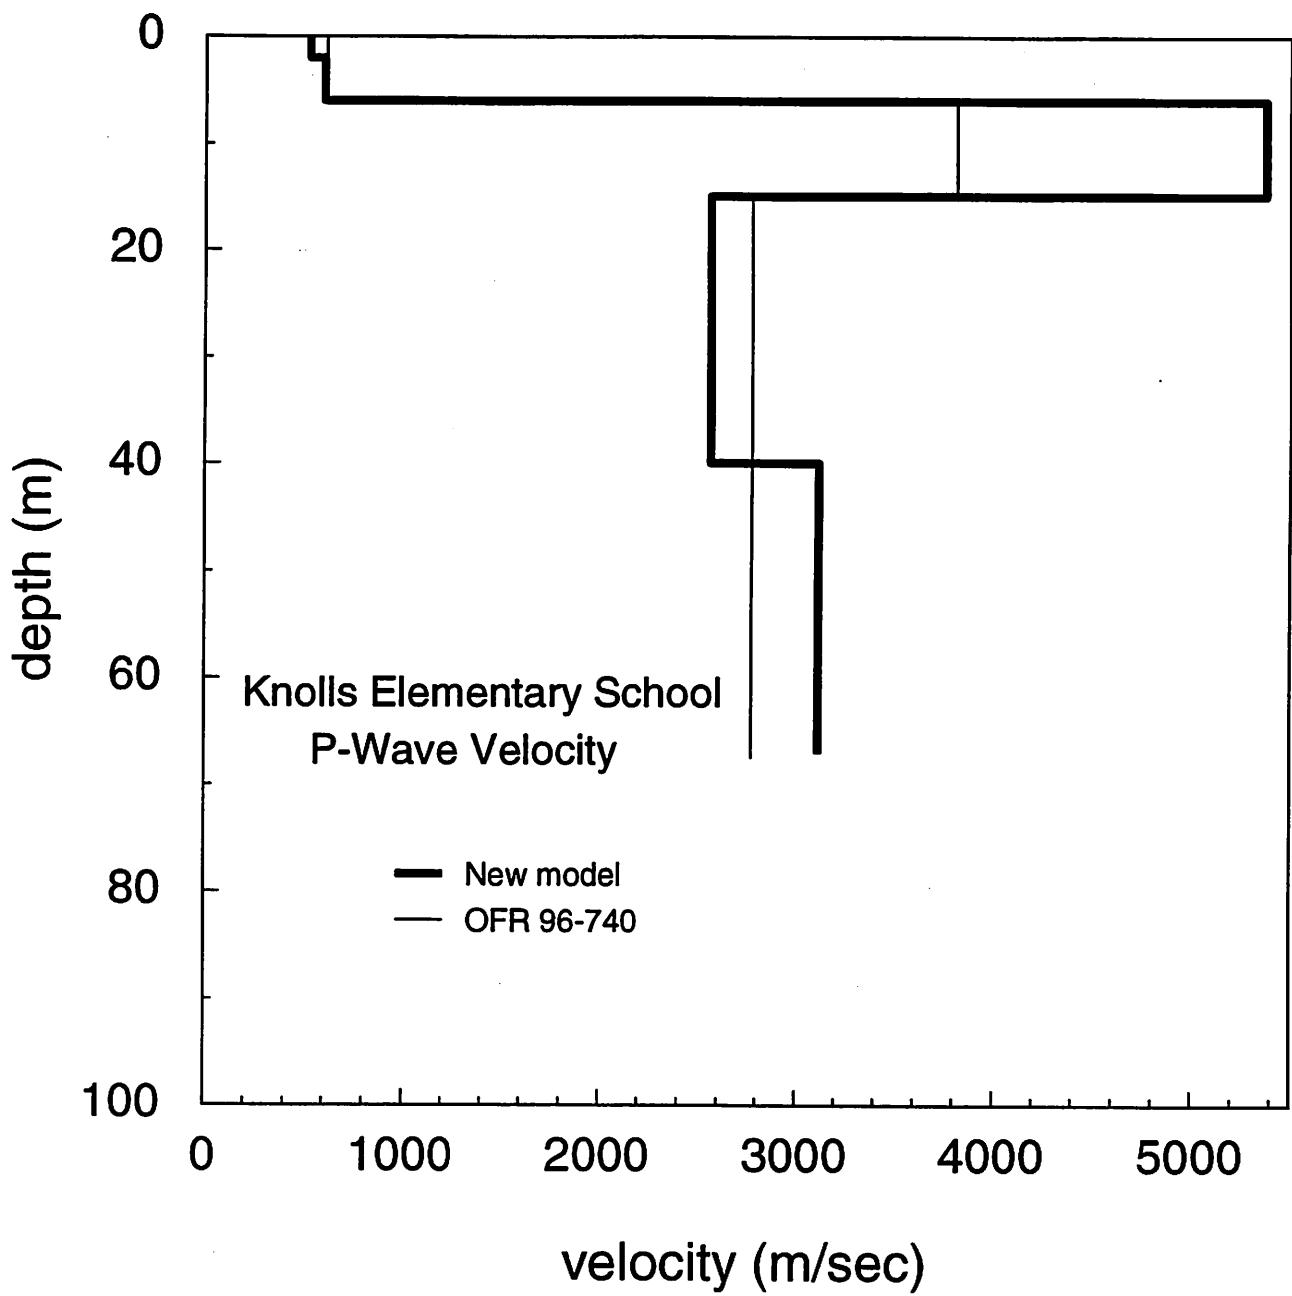


Figure C-8. Comparison of P-wave models Knolls Elementary School.

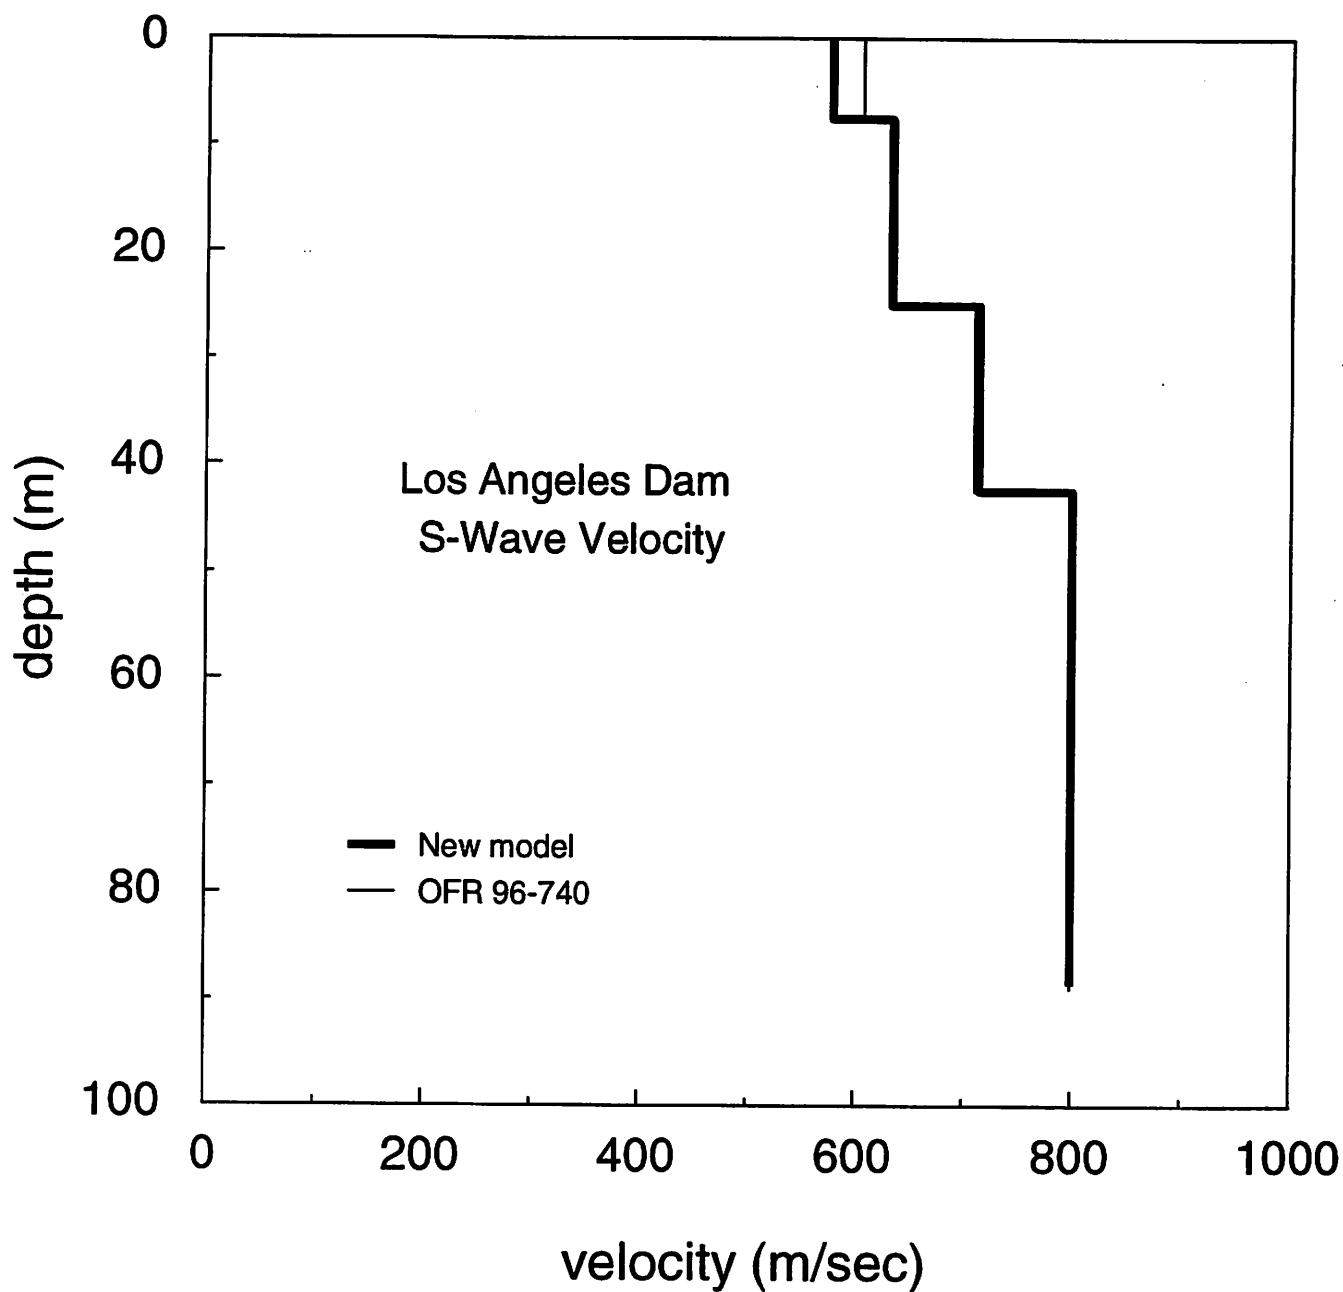


Figure C-9. Comparison of S-wave models Los Angeles Dam.

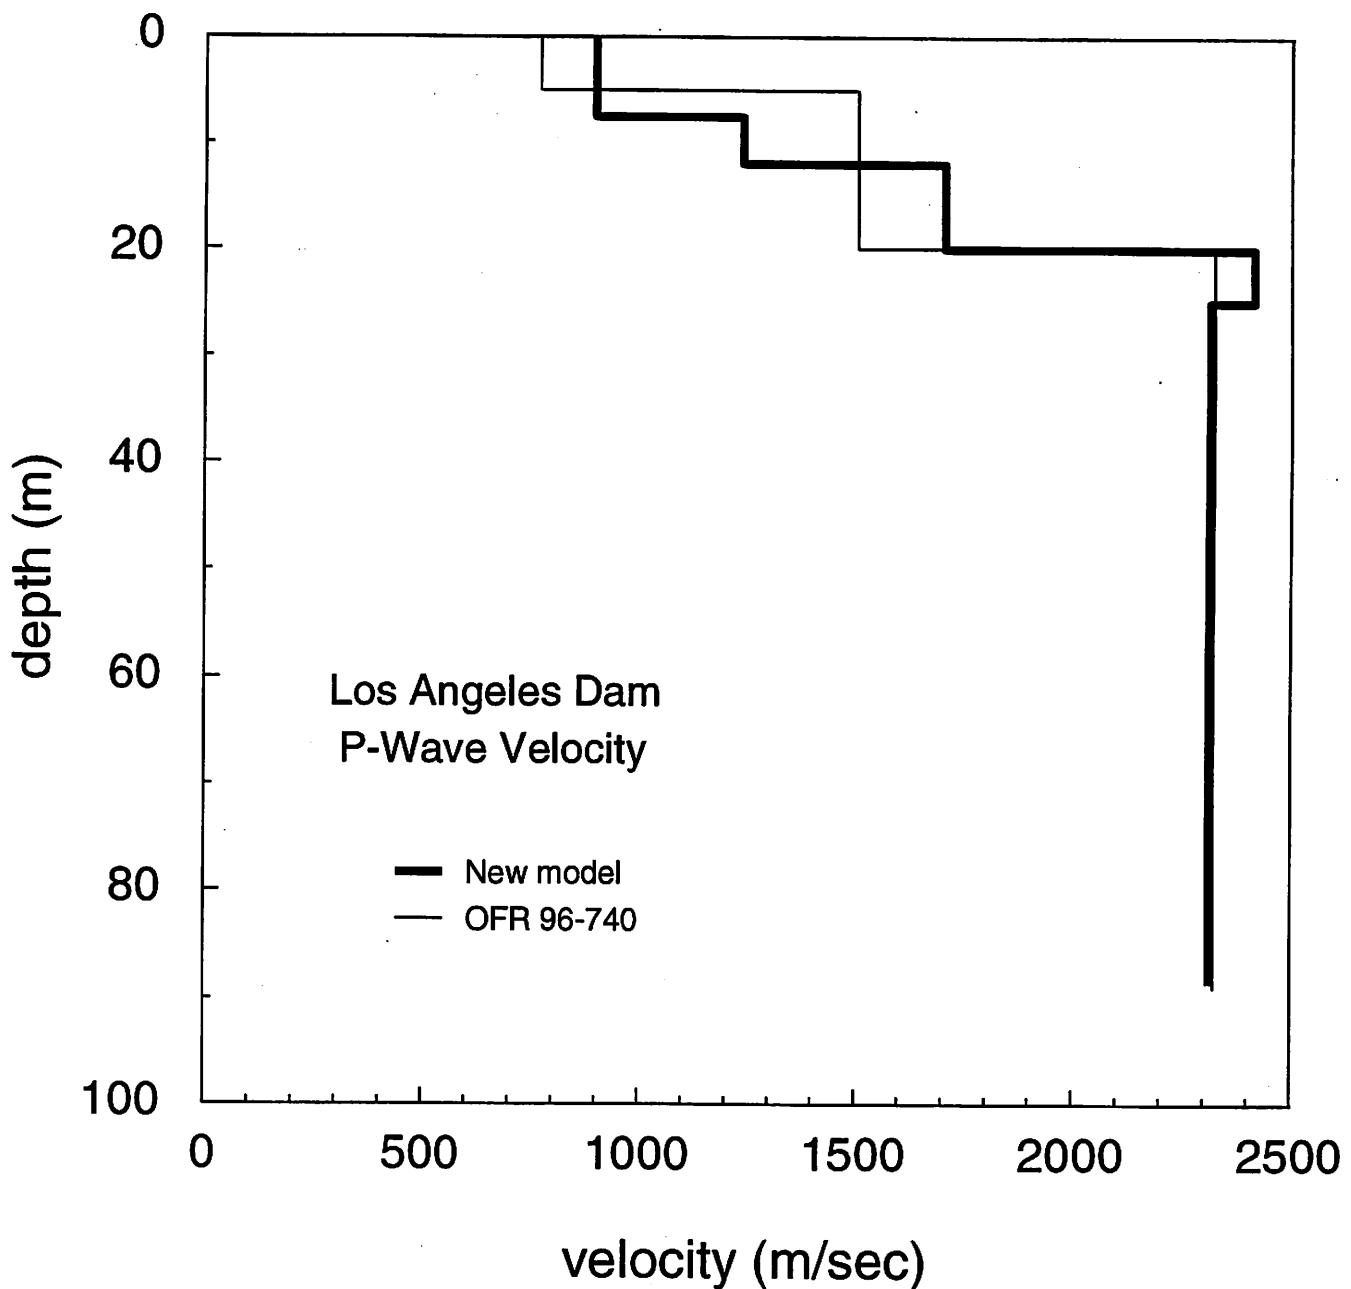


Figure C-10. Comparison of P-wave models Los Angeles Dam.

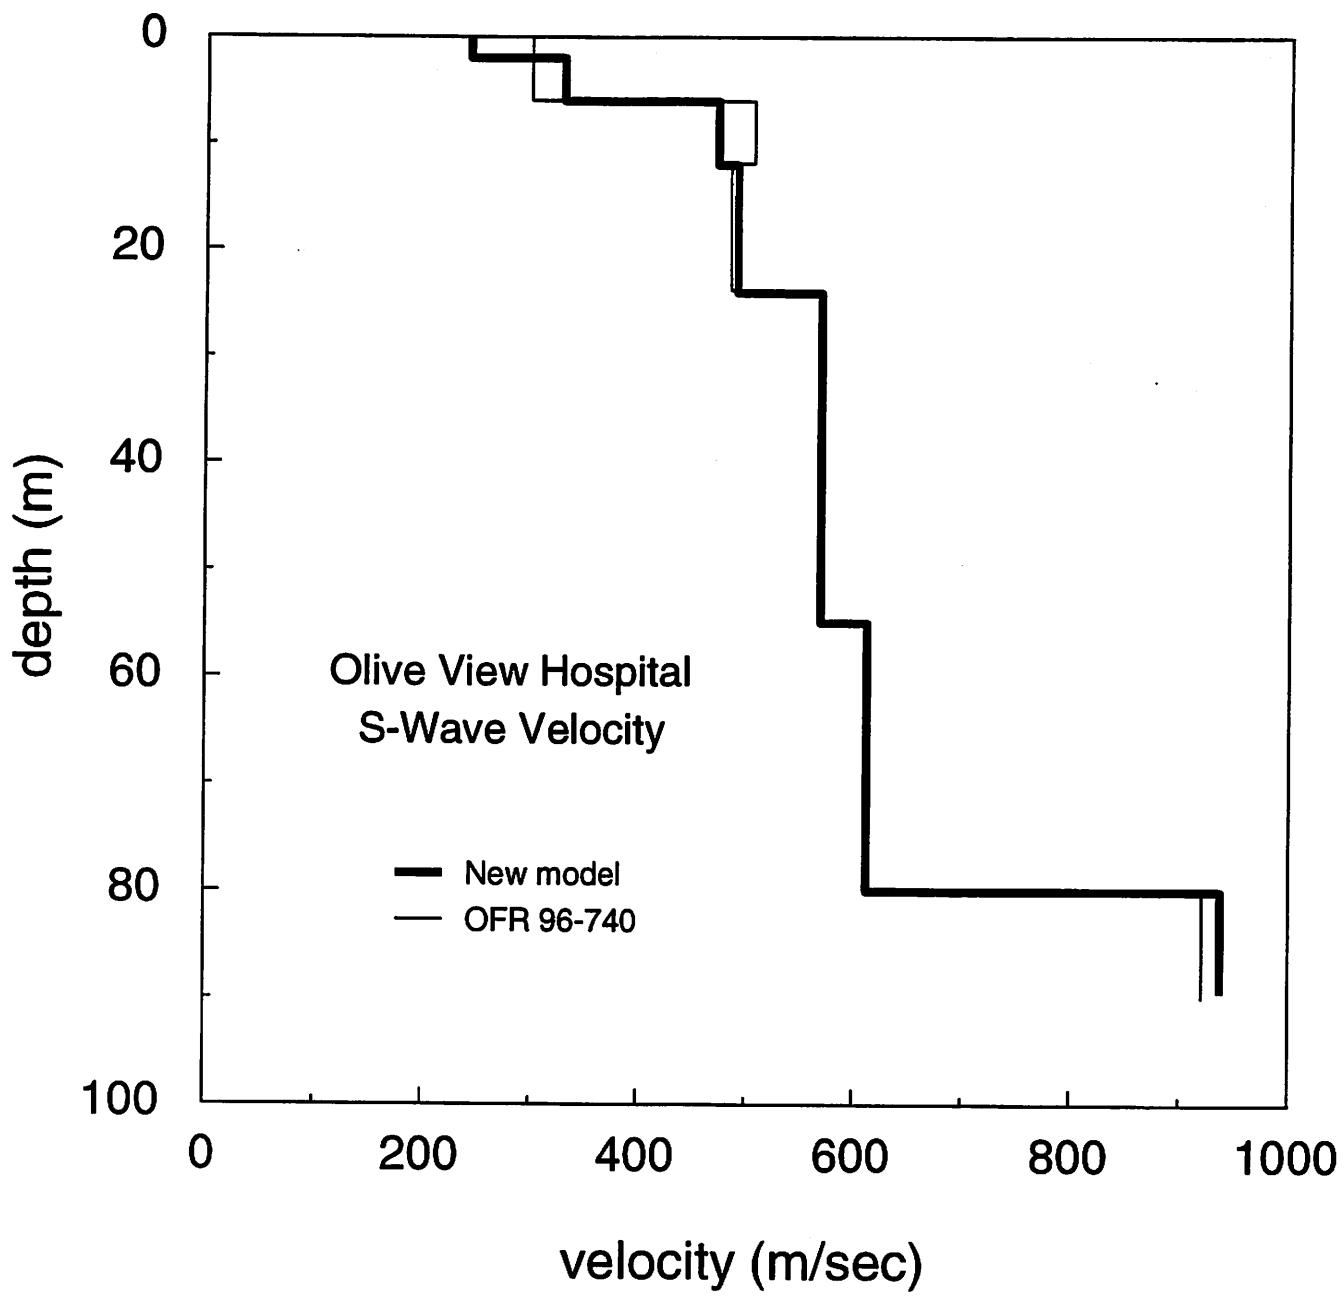


Figure C-11. Comparison of S-wave models Olive View Hospital.

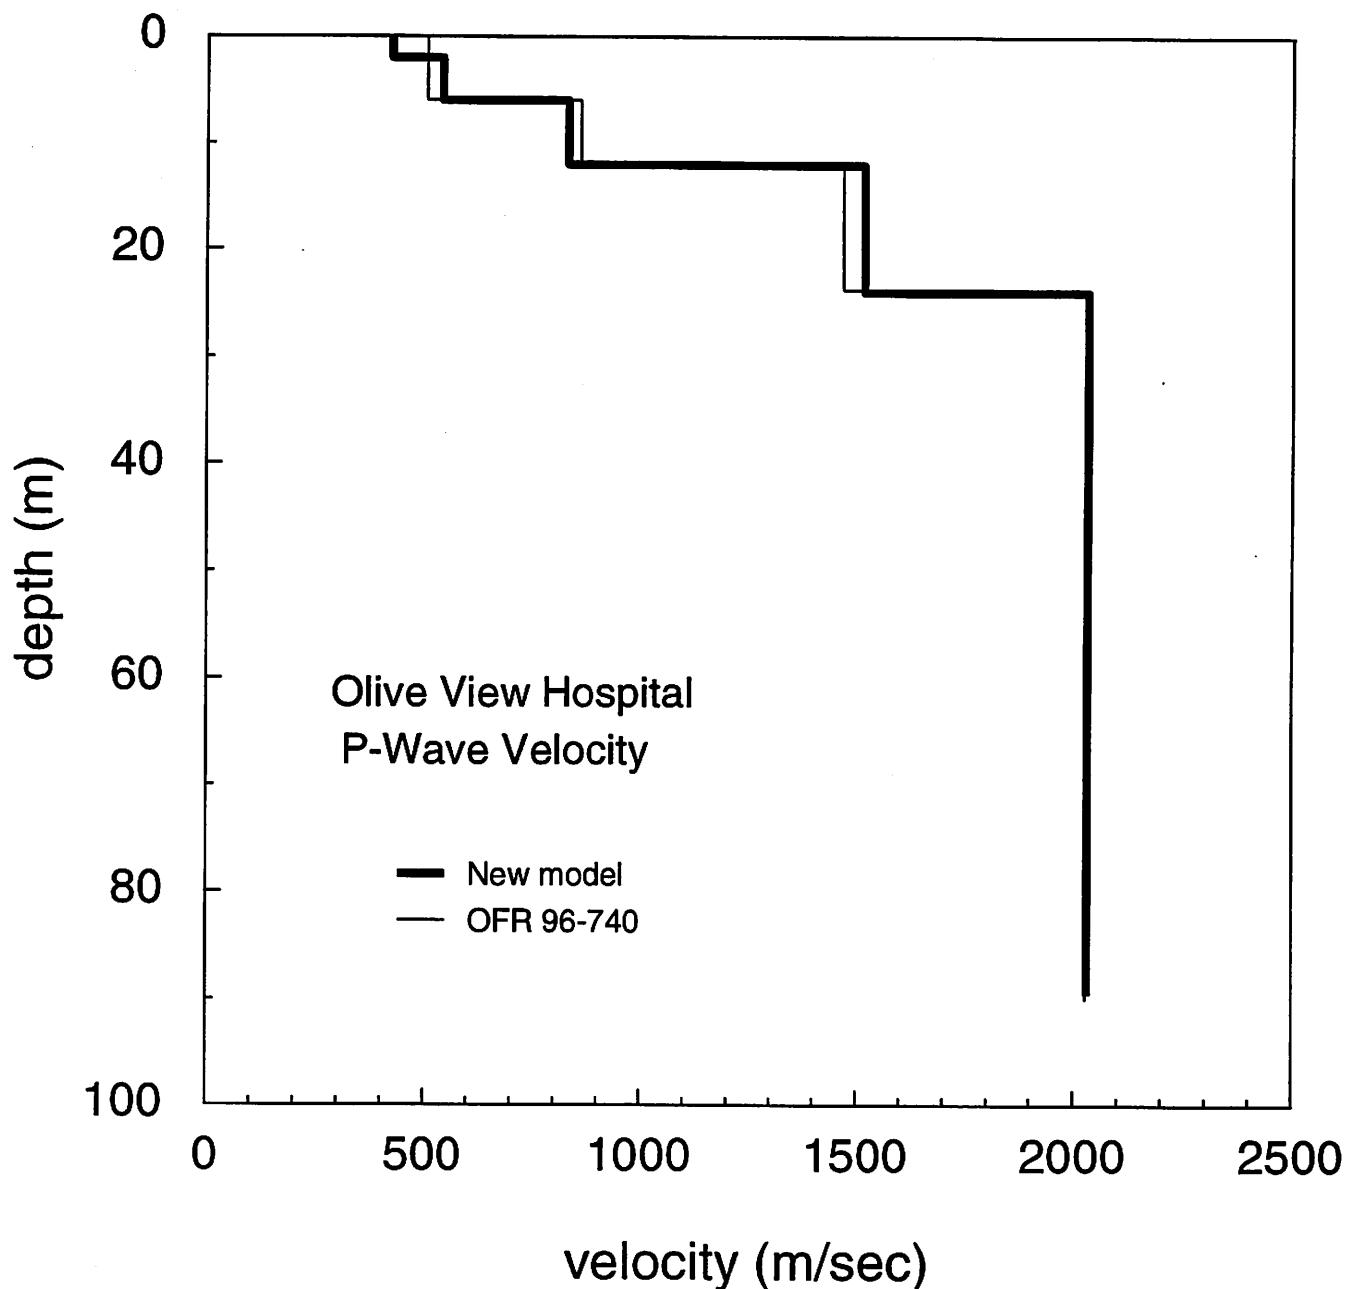


Figure C-12. Comparison of P-wave models Olive View Hospital.

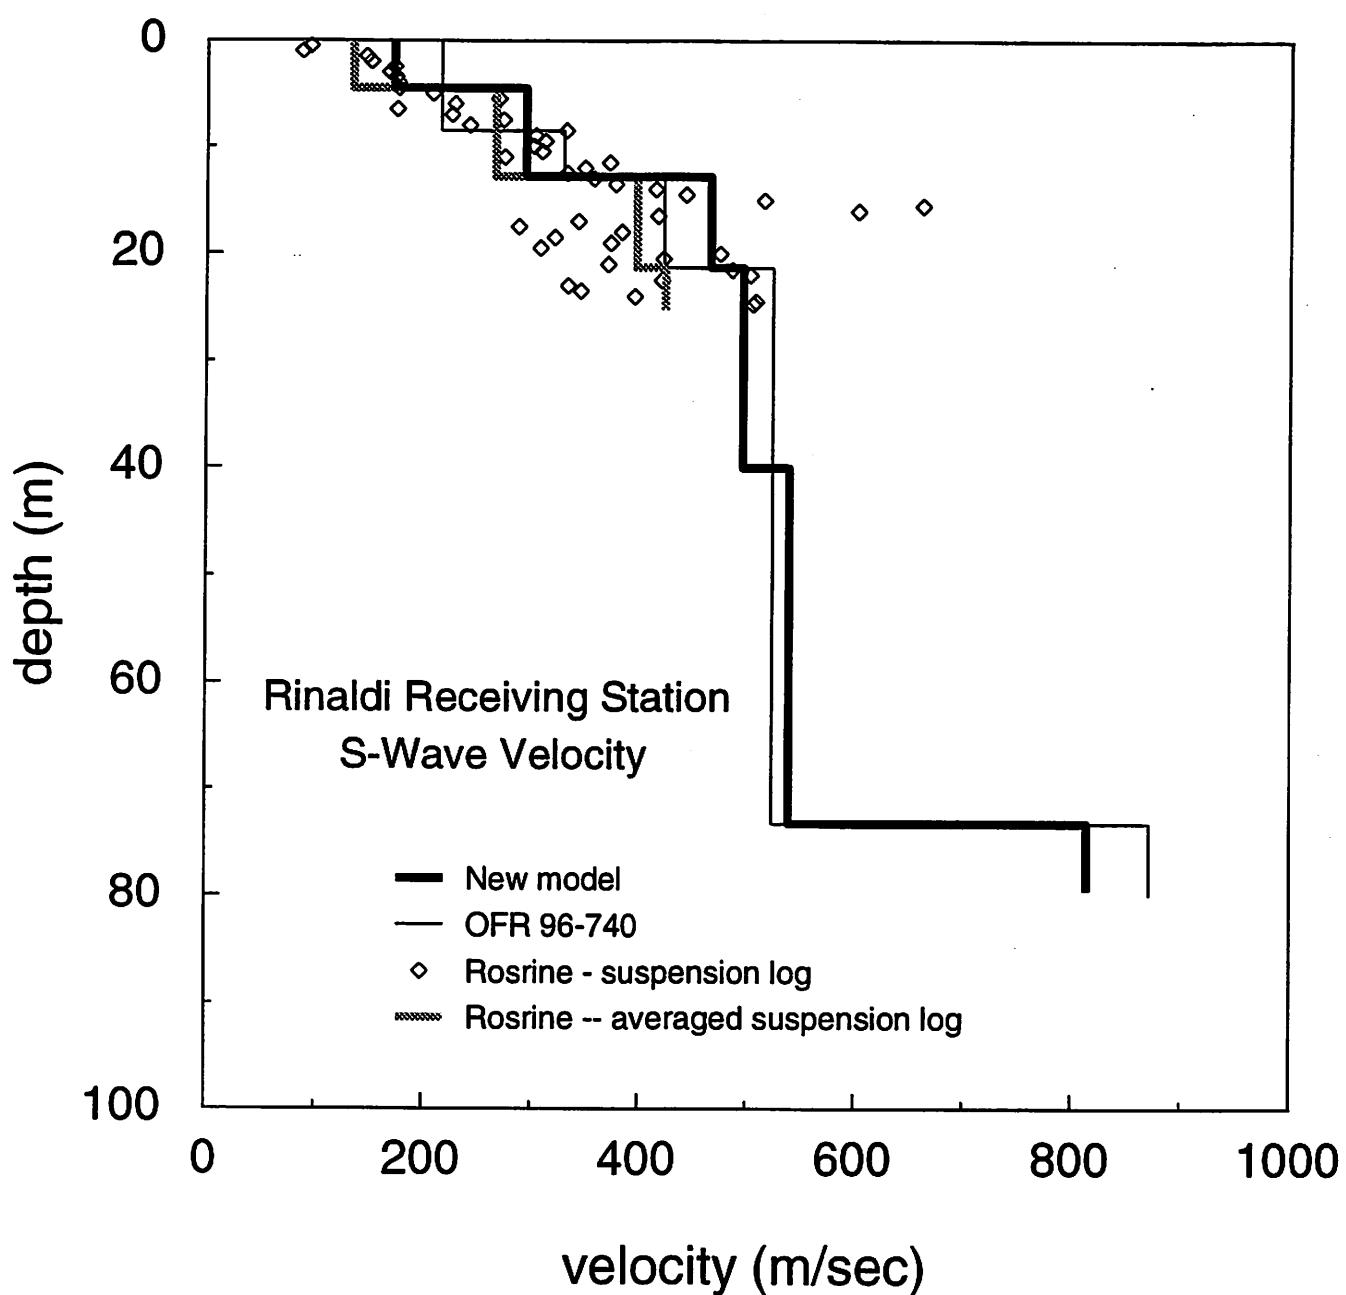


Figure C-13. Comparison of S-wave models Rinaldi Receiving Station, and a model derived from averaging suspension data over the equivalent depth intervals of the new model.

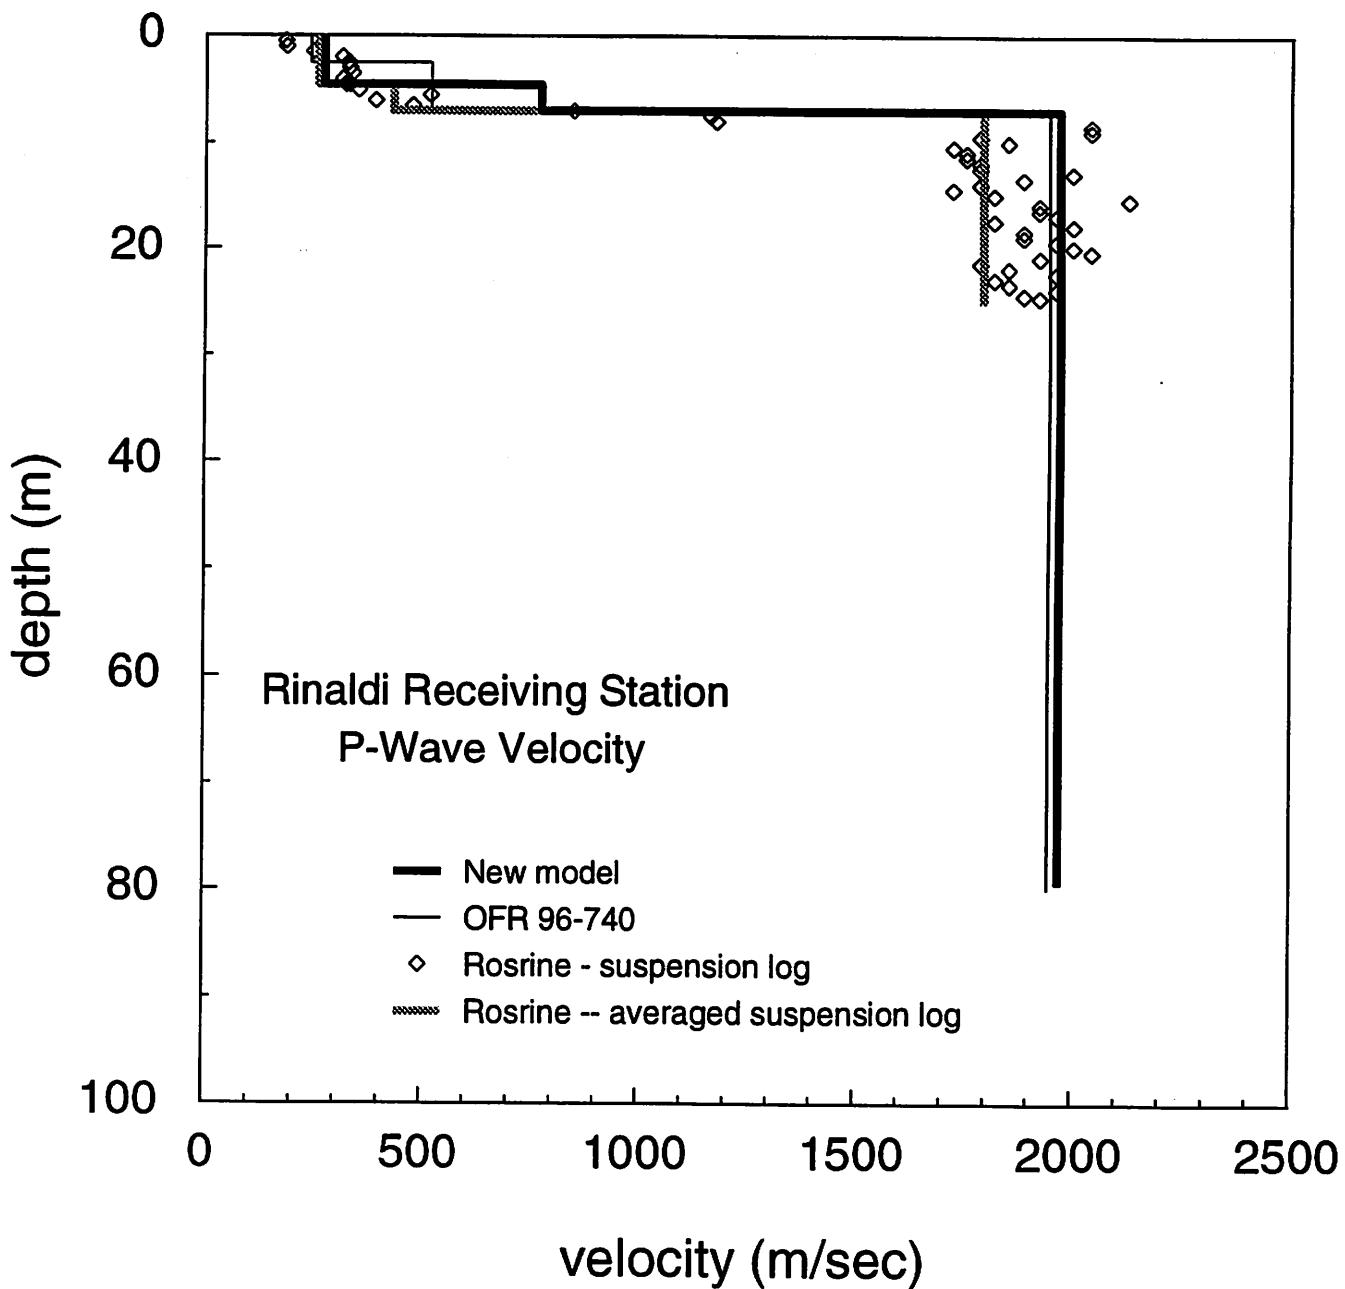


Figure C-14. Comparison of P-wave models Rinaldi Receiving Station, and a model derived from averaging suspension data over the equivalent depth intervals of the new model.

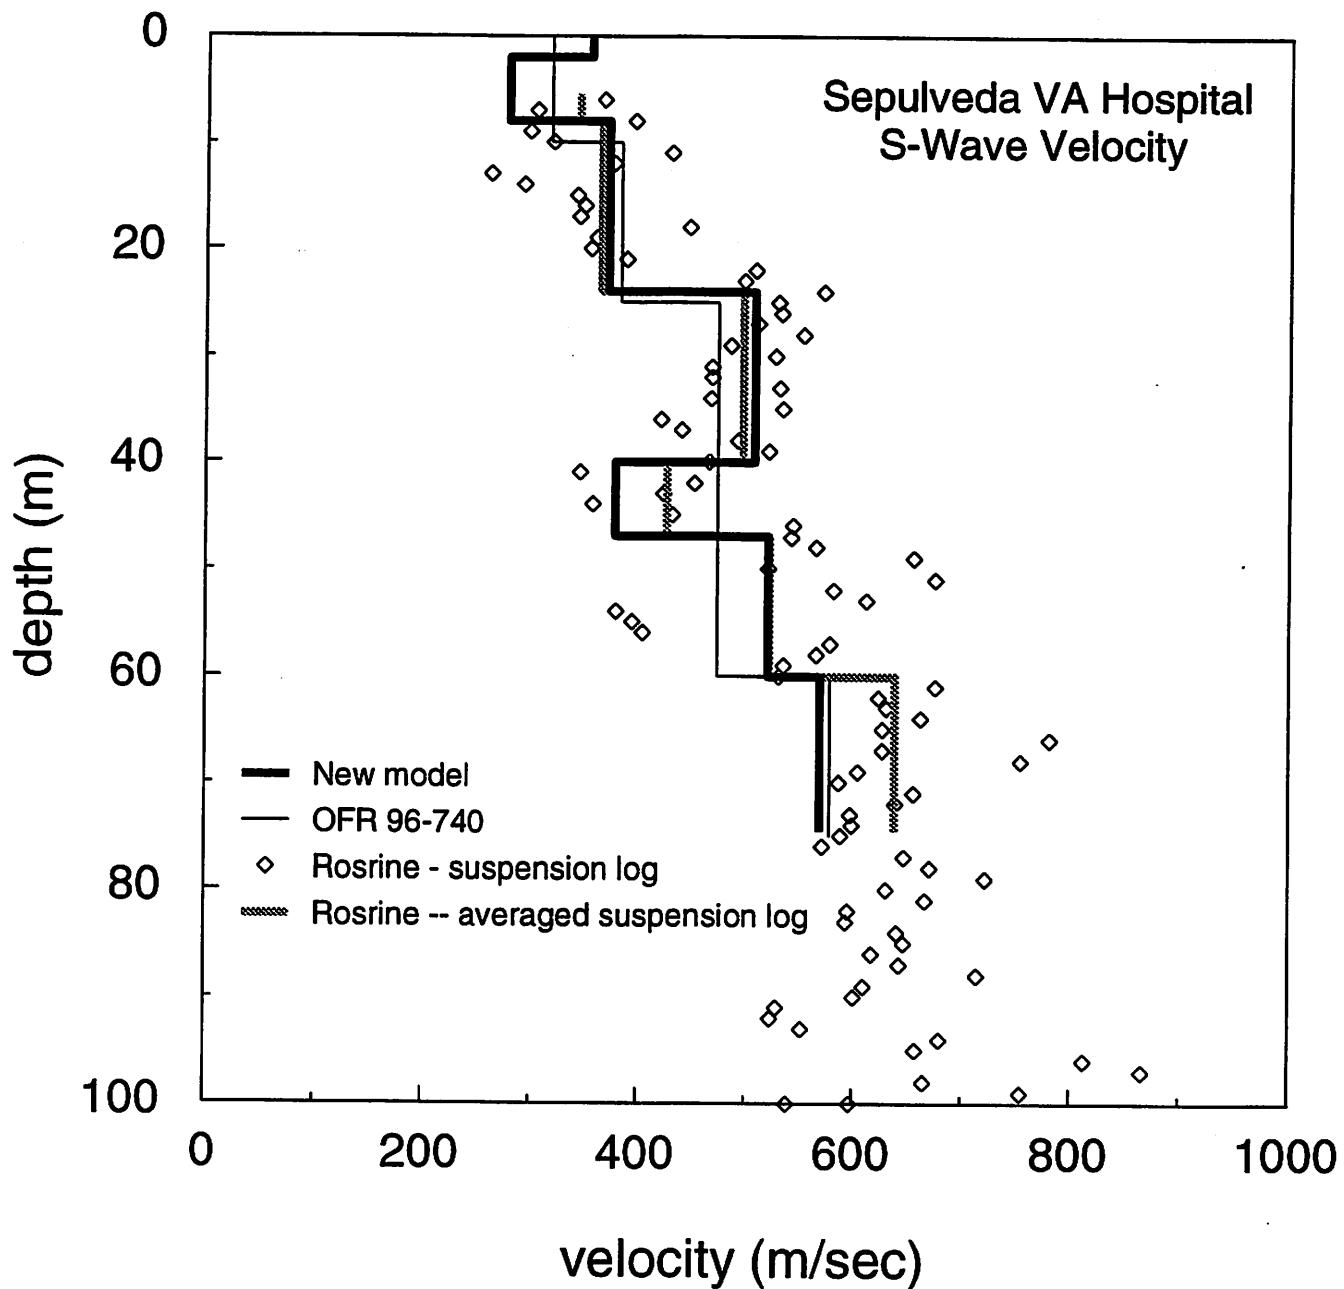


Figure C-15. Comparison of S-wave models Sepulveda V.A. Hospital, and a model derived from averaging suspension data over the equivalent depth intervals of the new model.

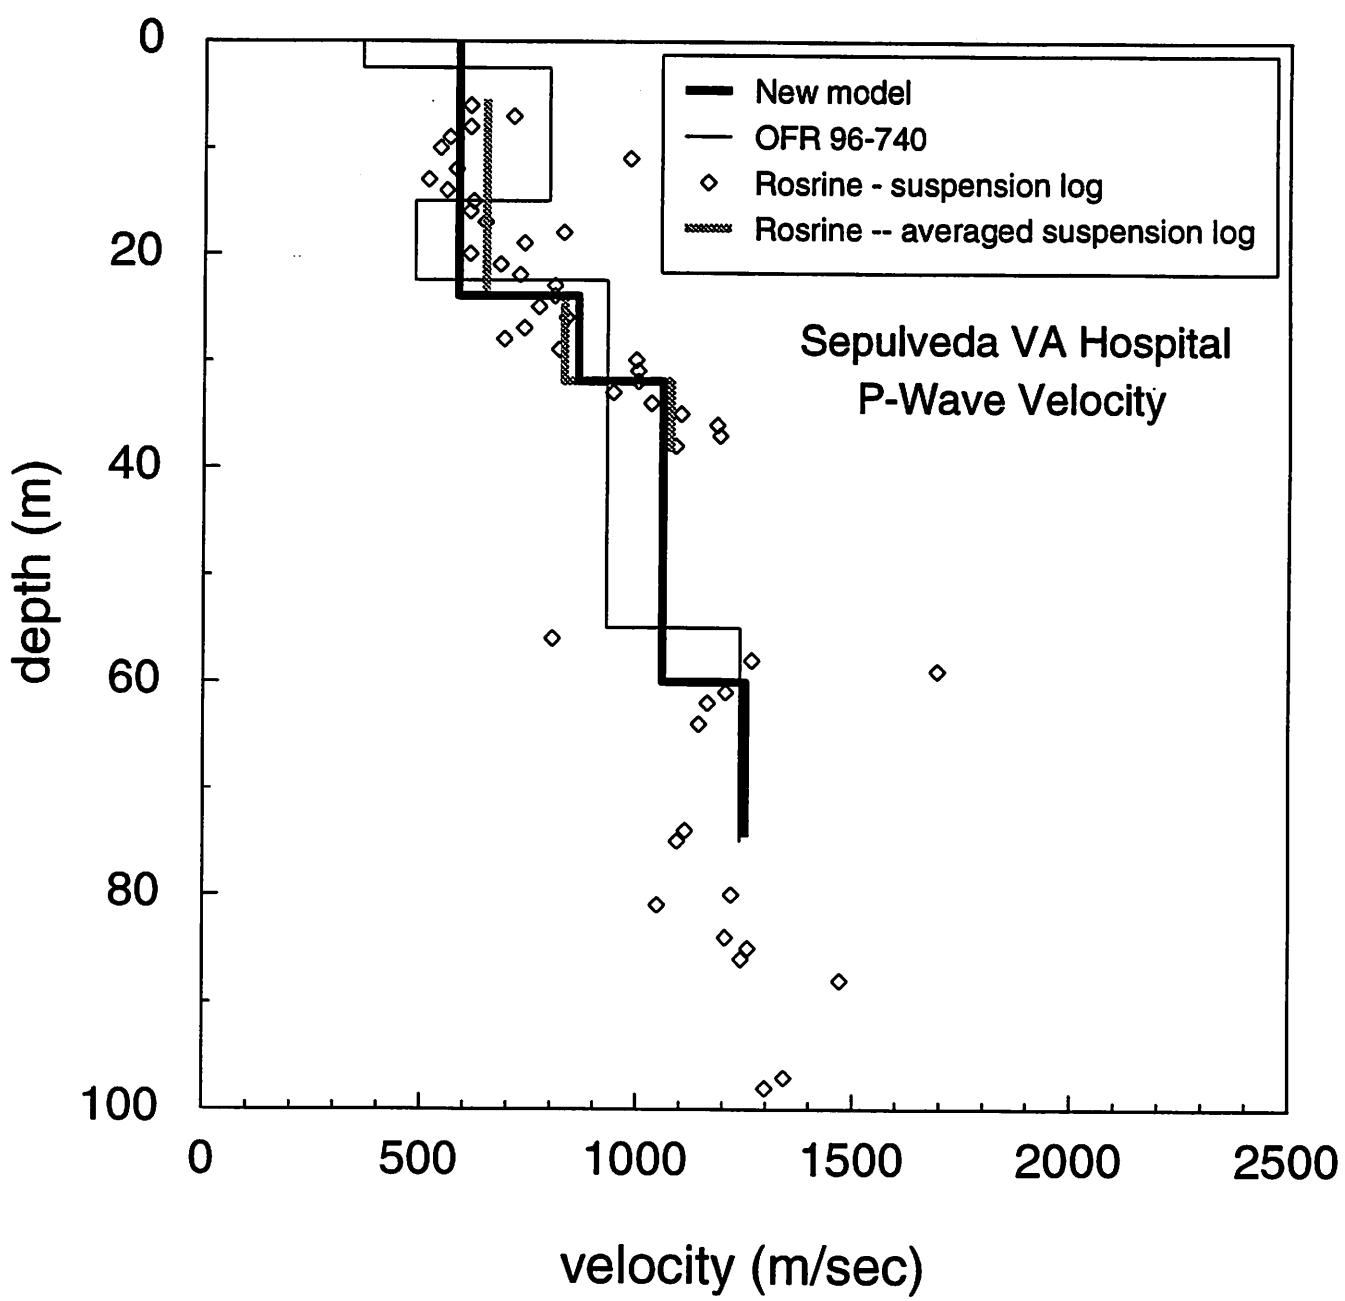


Figure C-16. Comparison of P-wave models Sepulveda V.A. Hospital, and a model derived from averaging suspension data over the equivalent depth intervals of the new model.

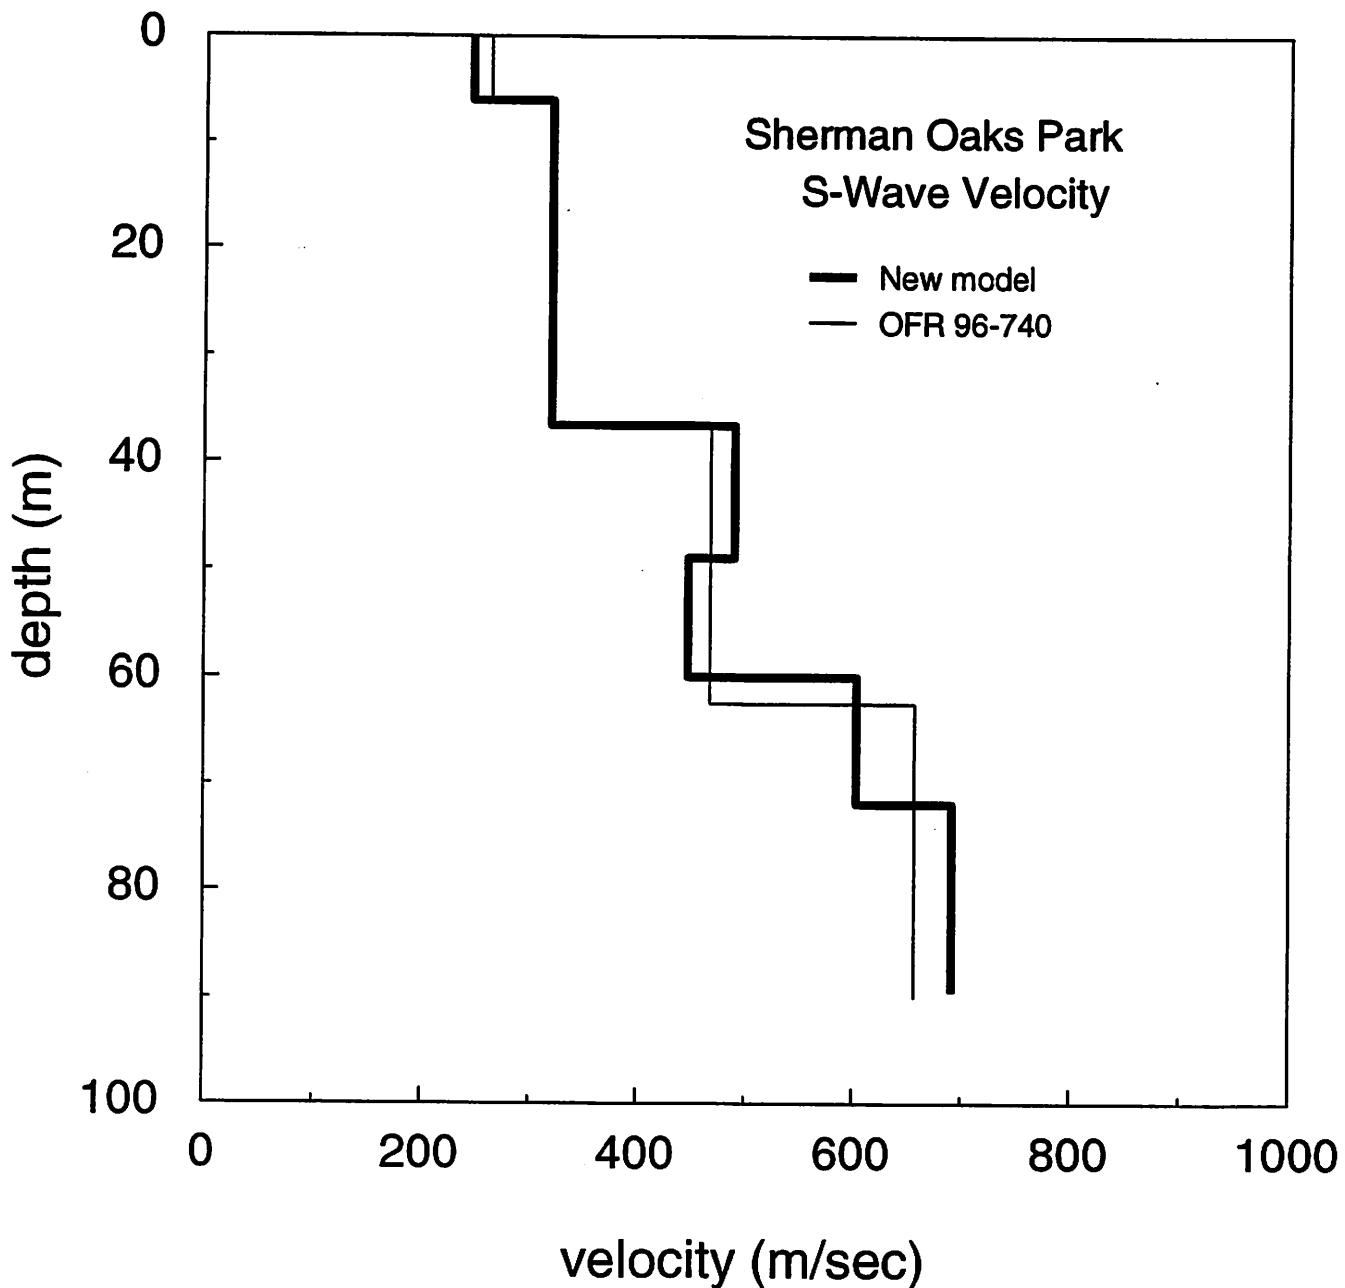


Figure C-17. Comparison of S-wave models Sherman Oaks Park.

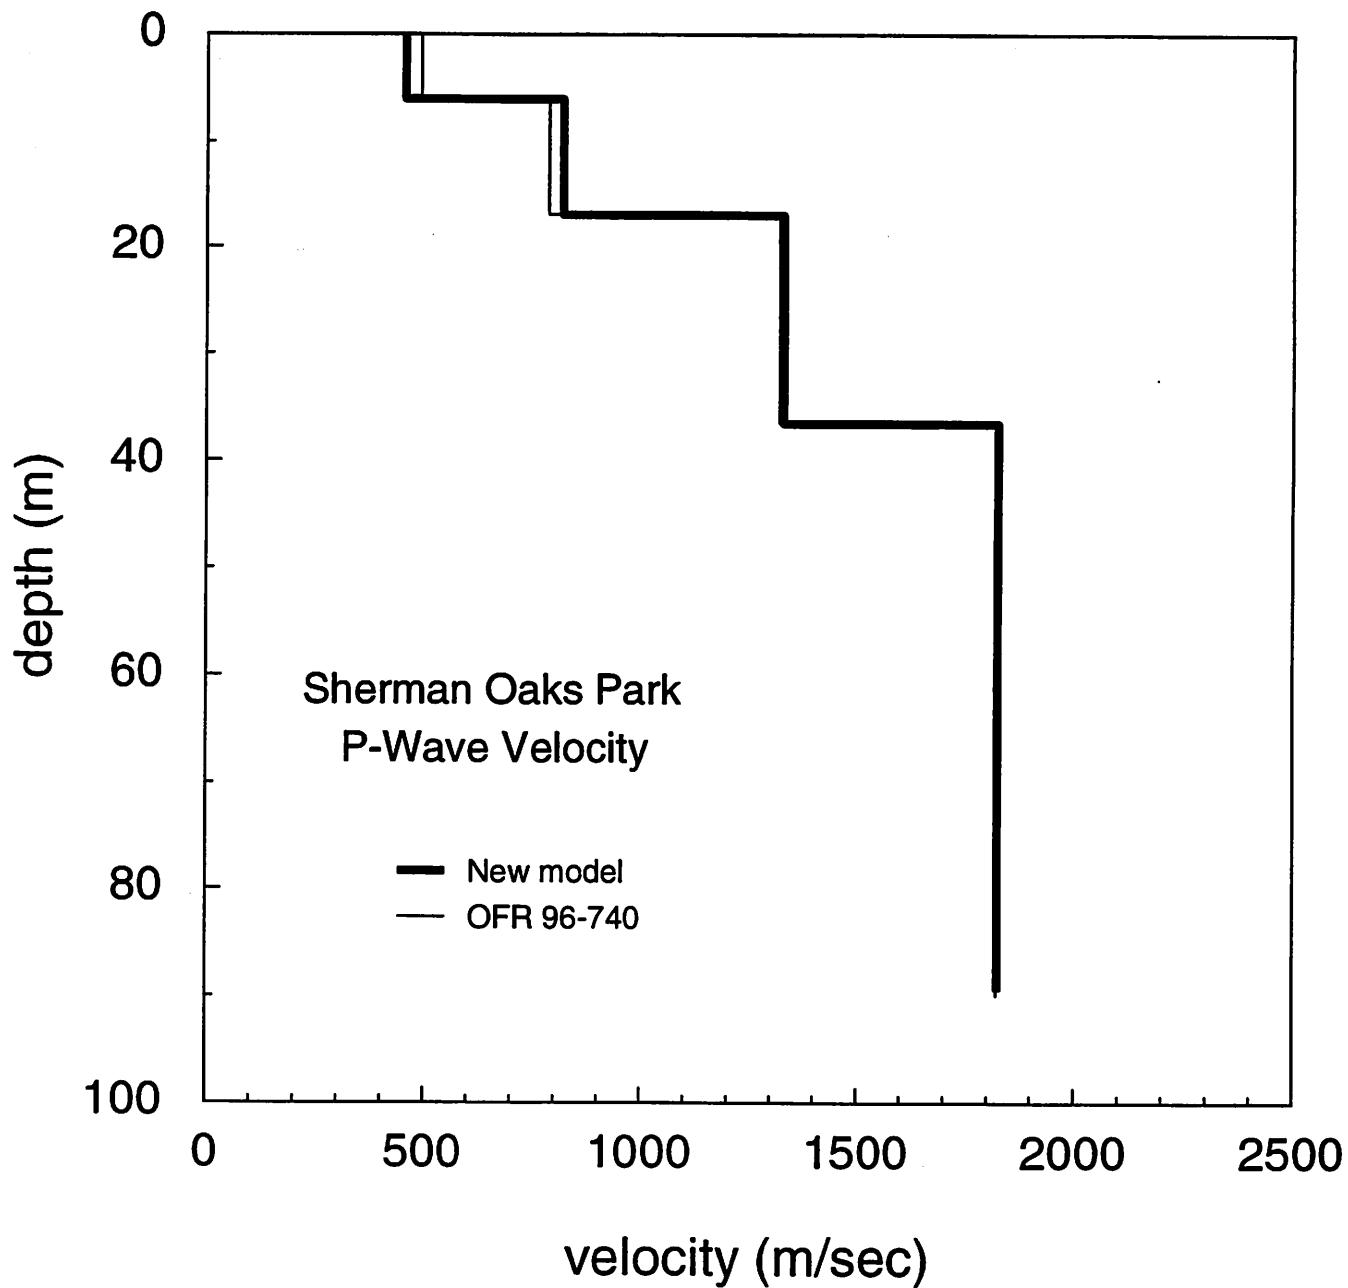


Figure C-18. Comparison of P-wave models Sherman Oaks Park.

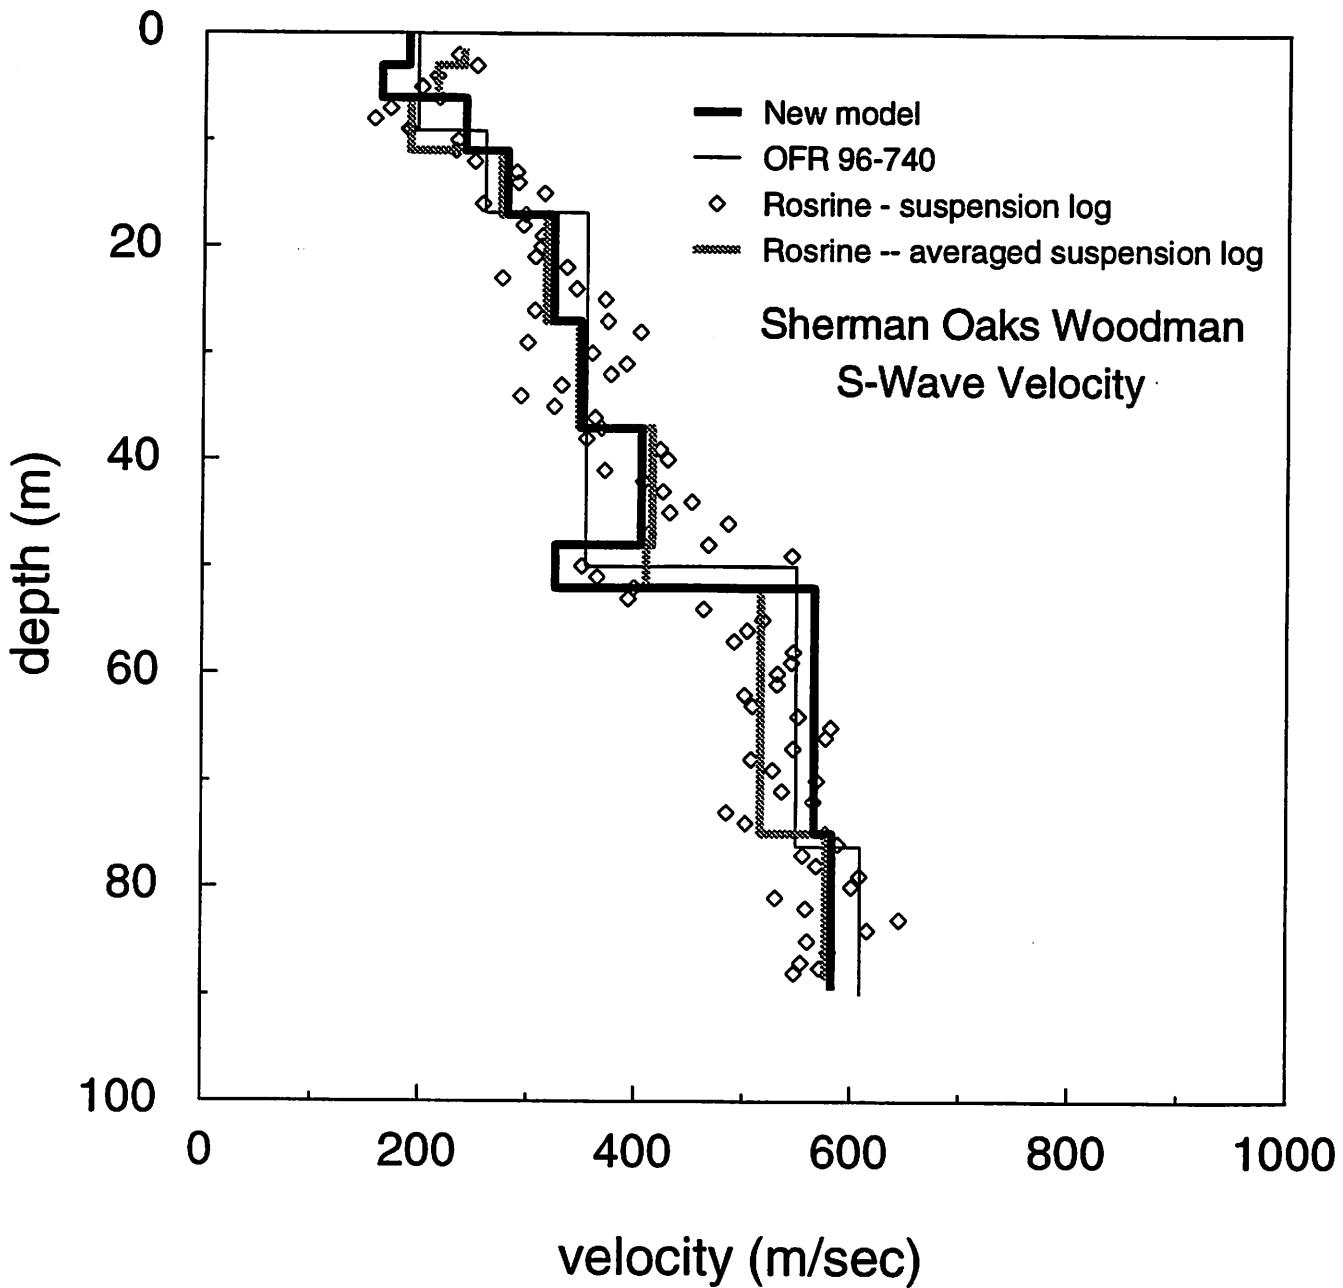


Figure C-19. Comparison of S-wave models Sherman Oaks Woodman, and a model derived from averaging suspension data over the equivalent depth intervals of the new model.

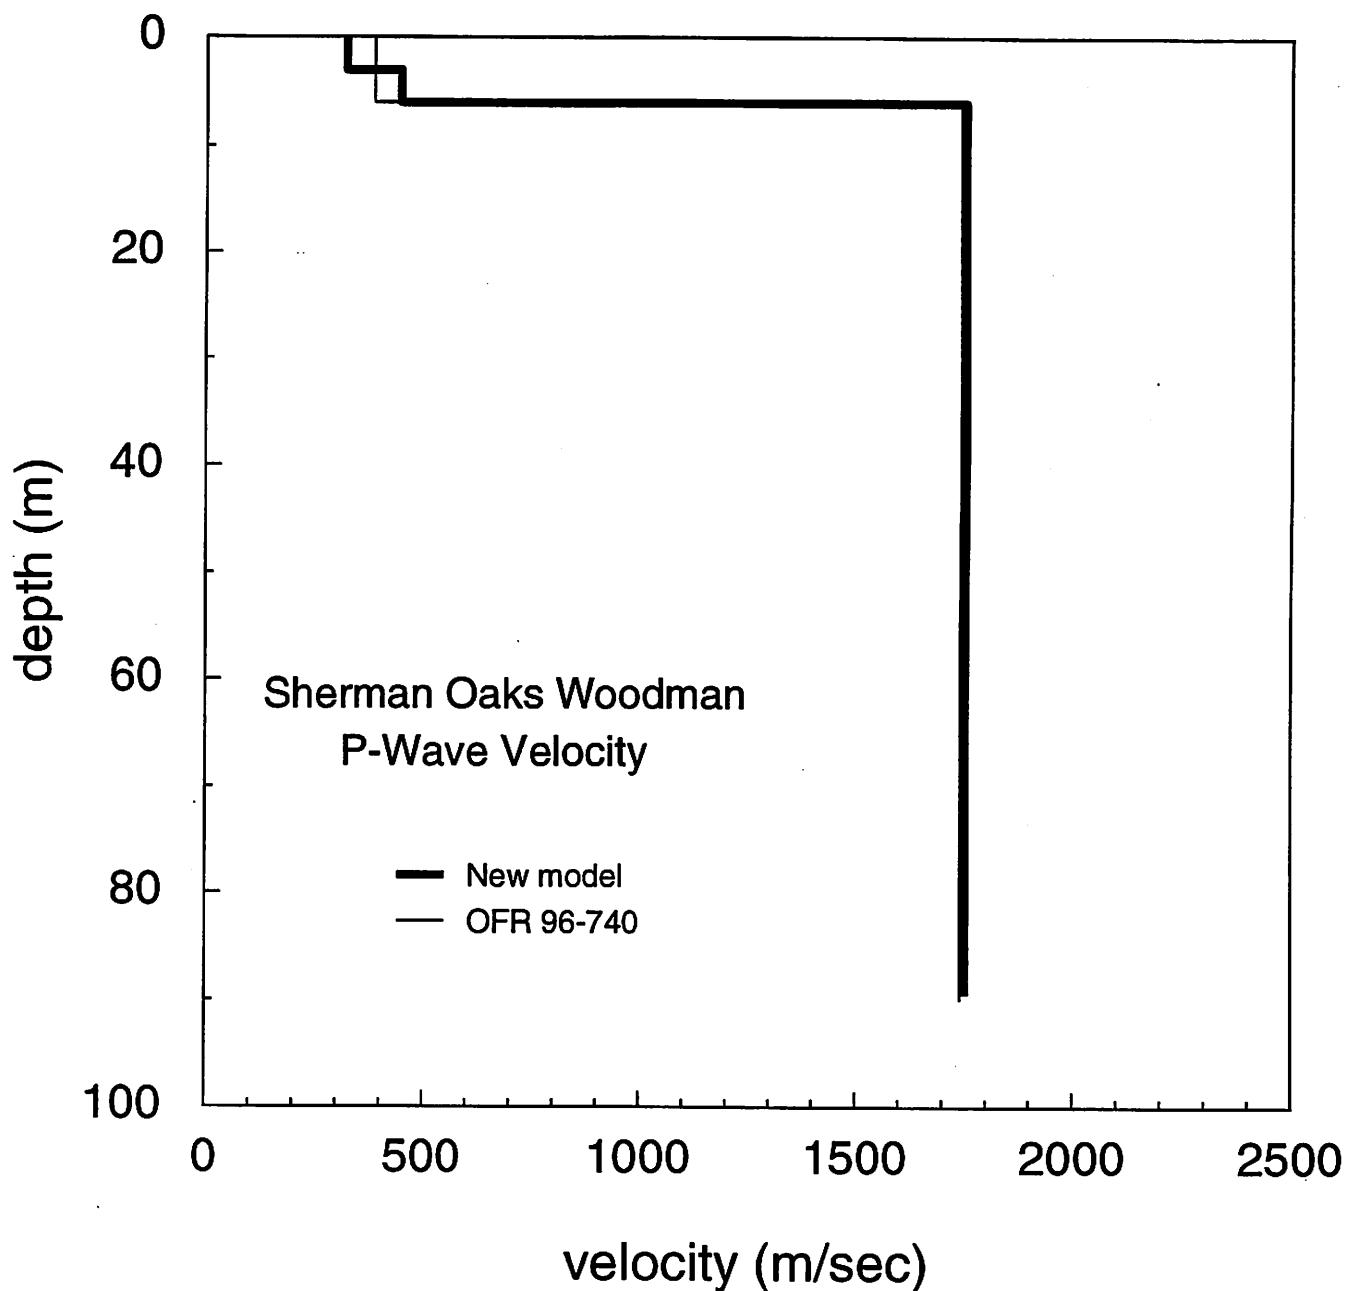


Figure C-20. Comparison of P-wave models Sherman Oaks Woodman.

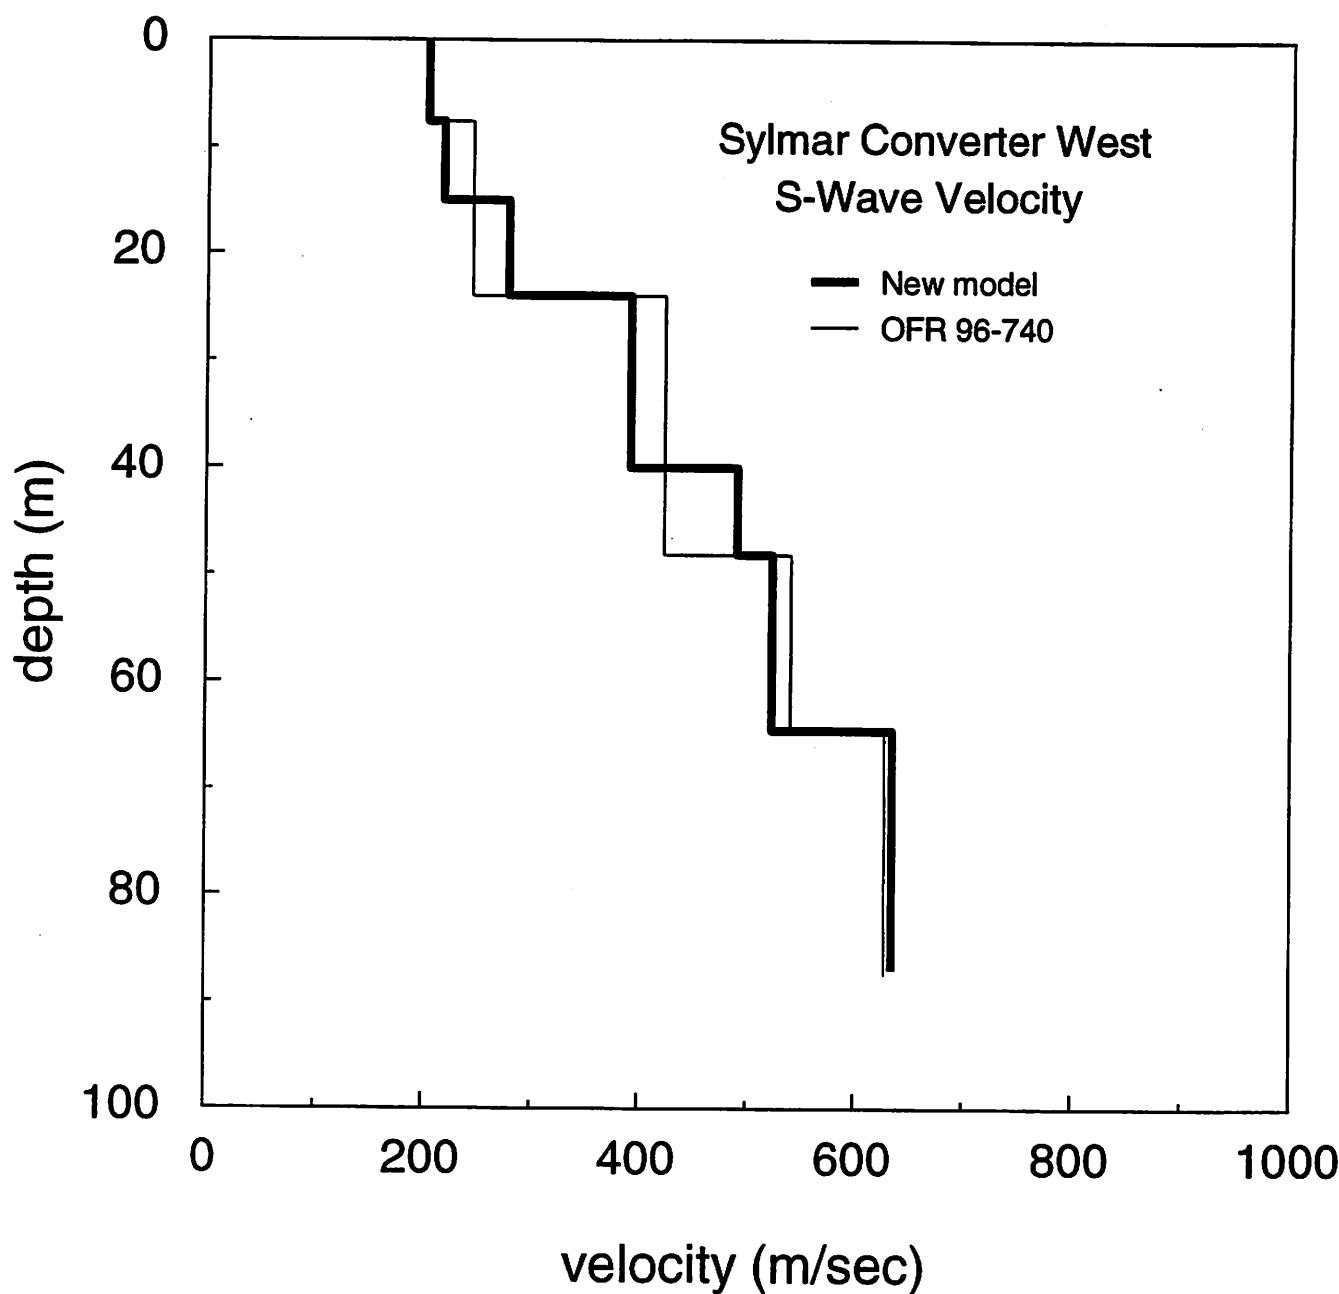


Figure C-21. Comparison of S-wave models Sylmar Converter West.

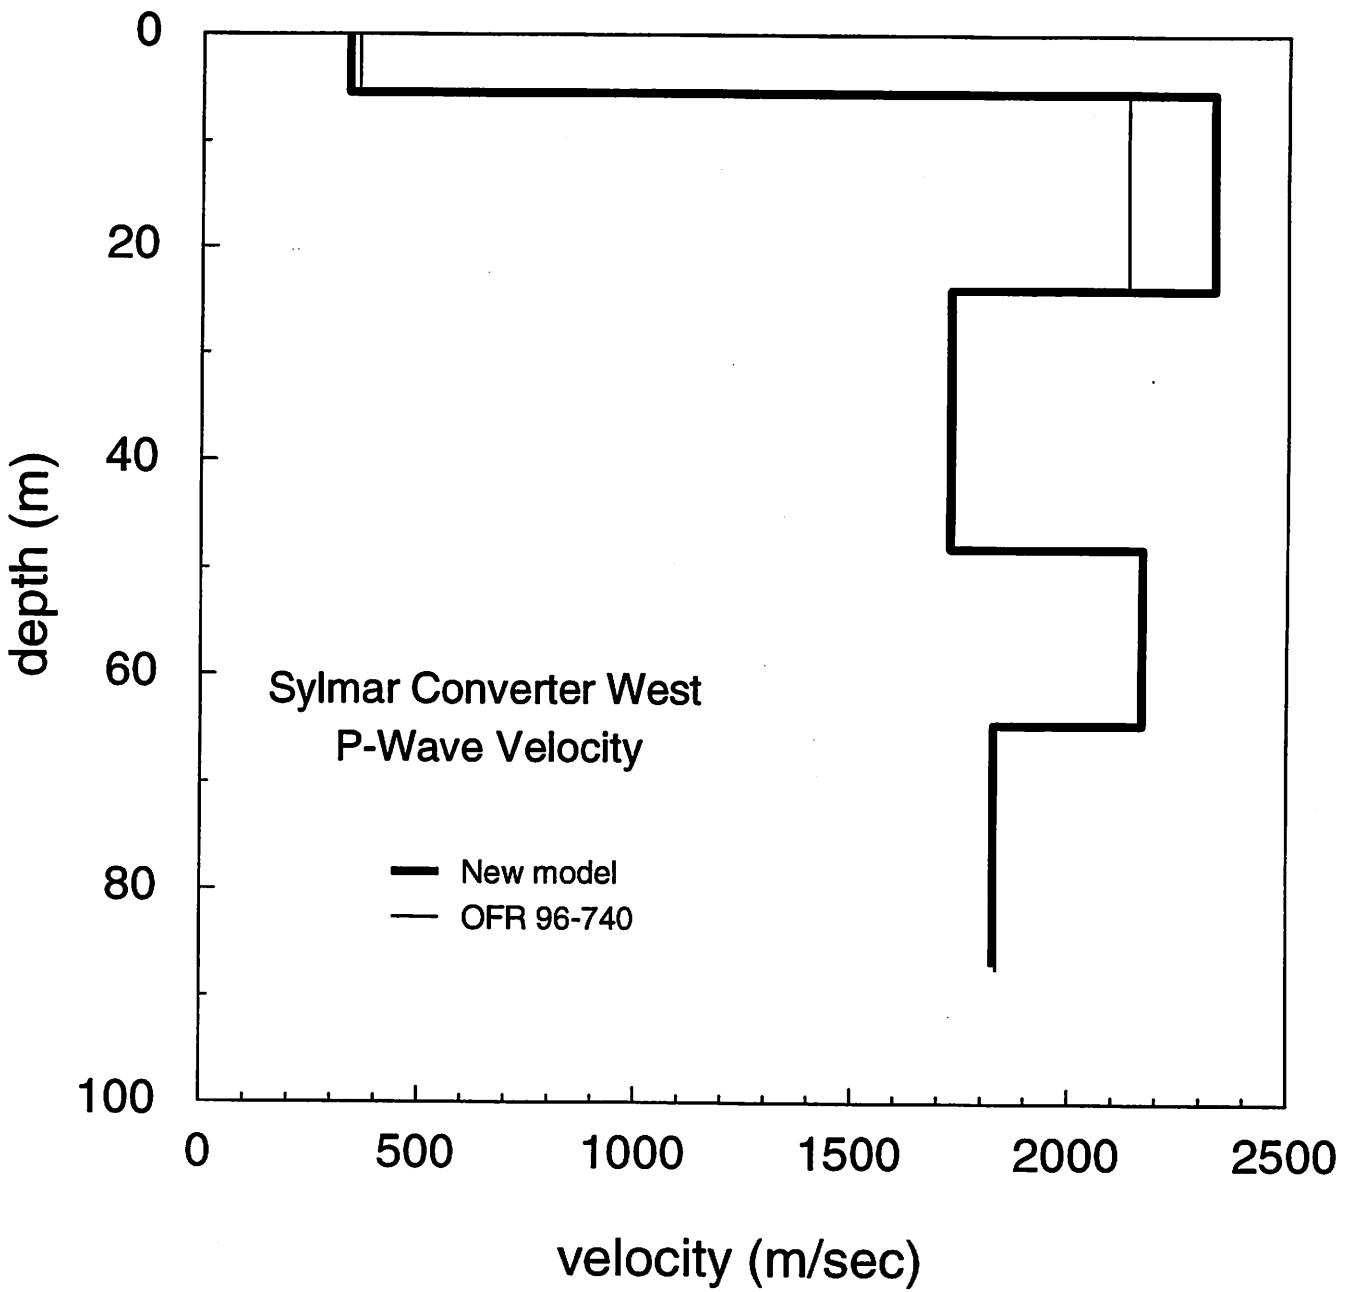


Figure C-22. Comparison of P-wave models Sylmar Converter West.

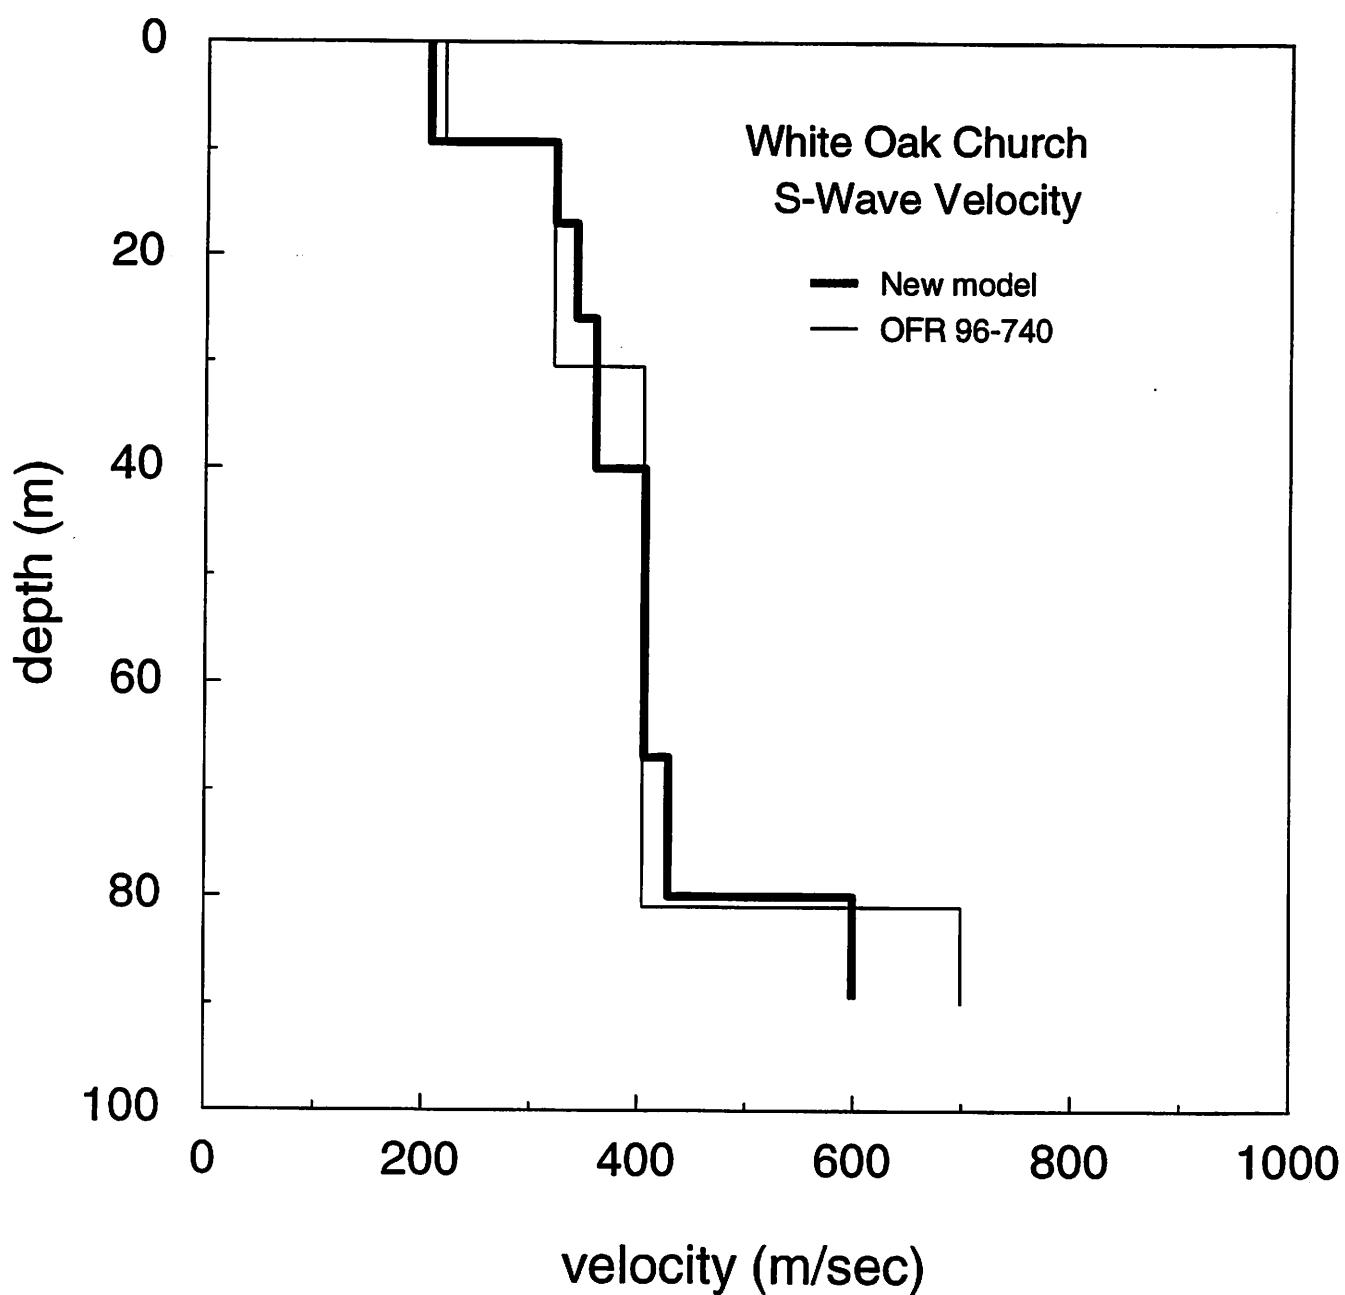


Figure C-23. Comparison of S-wave models White Oak Church.

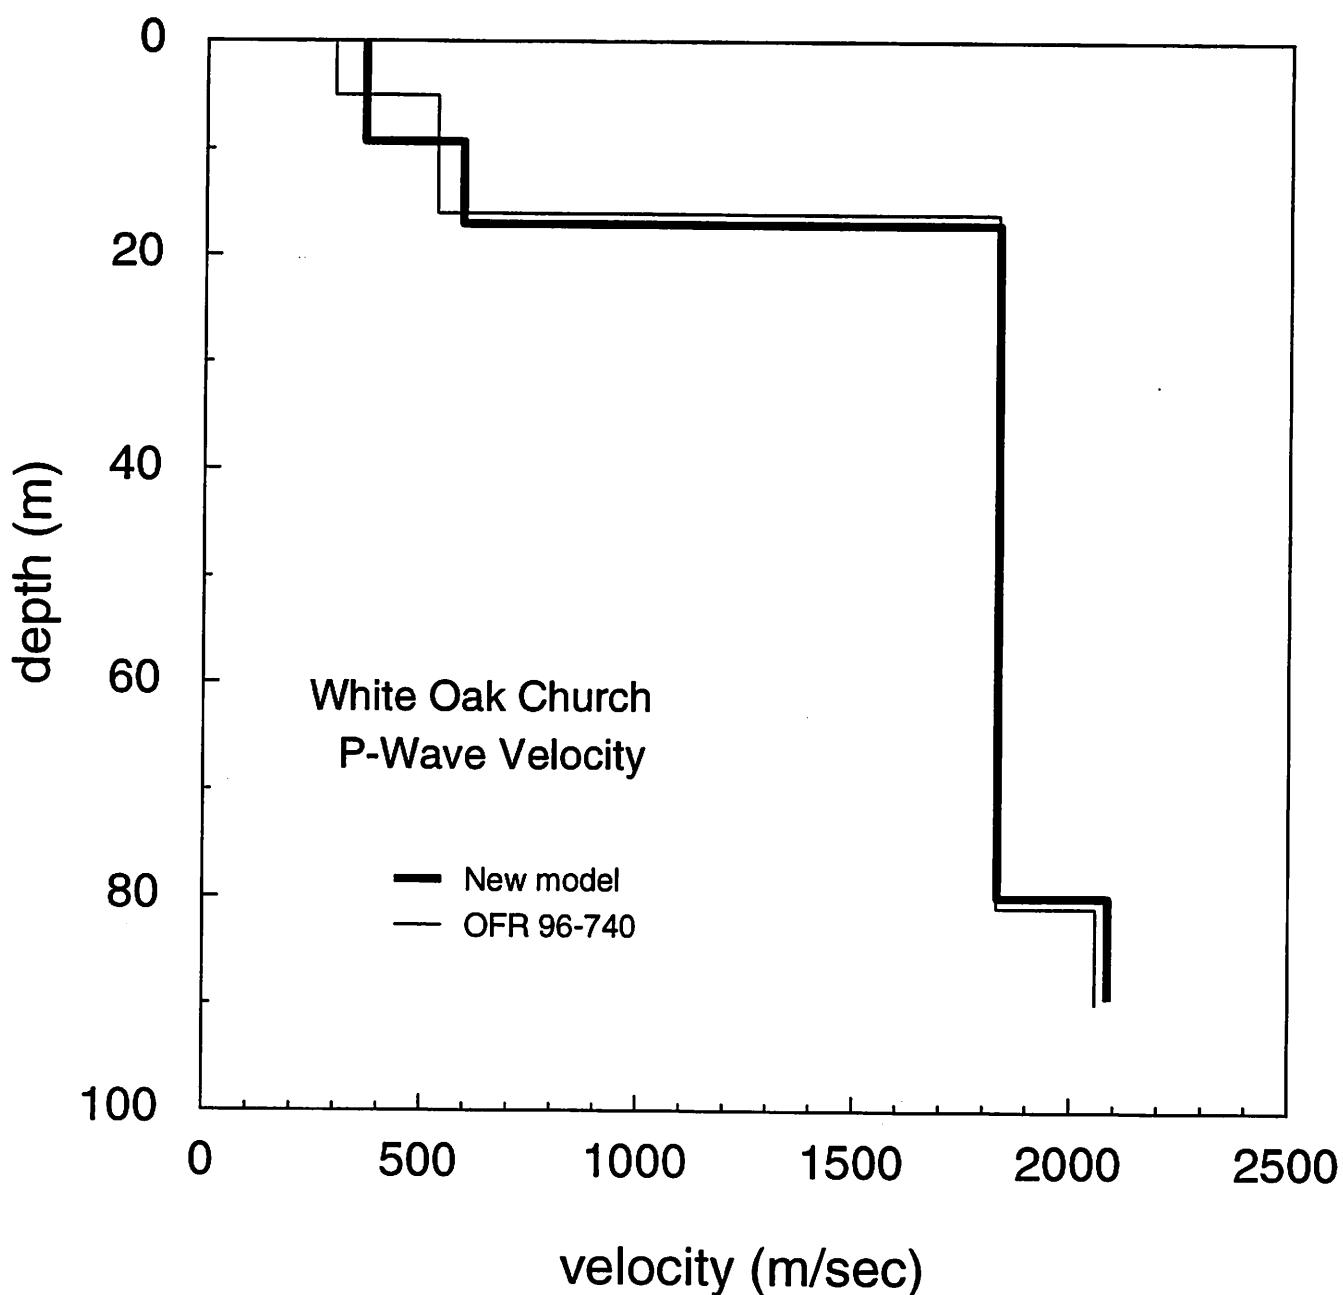


Figure C-24. Comparison of P-wave models White Oak Church.